

TESTING / INSPECTION REPORT

REPORT NO : TT-080219-1

COMPANY : Apacer Technology Inc.
ADDRESS : 9F, 100, Sec.1, Hsin Tai Wu Rd.,
Hsichih Taipei Hsien 221, Taiwan, R.O.C.
TEL : 886-2-2696-1666
FAX : 886-2-2696-1668
SPECIMEN : ATA Disk Module
DATE OF RECEIVED : 2008/01/28
DATE OF TESTED : 2008/02/15

TEST / INSPECTION ITEMS : Temperature Test

REMARKS :

- The laboratory is accredited by ISO/IEC 17025 General Requirements for the Competence of Calibration and Testing Laboratory.
- The results only apply to the device under test.
- This report is 8 pages, and no part of it may be abstracted or reproduced.

Test Engineer : <i>David Wu</i>	
Approval Signatory <i>David Lee</i>	Laboratory Head : <i>Jason Shih</i>

TESTING / INSPECTION REPORT

TESTING EQUIPMENT :

Chamber : TMJ-9712C S/N : T-12-050709

TEST ENVIRONMENT :

Temperature : 19.3°C (25±10°C)

Relative Humidity : 69% RH (60±20% RH)

SPECIMEN :

Model : ADMIII

Quantity : 2 pieces

TEST SPECIFICATION :

(1) Temperature Test (Operation)

Step	Temperature (°C)	Duration
1	70	96 hrs
2	0	96 hrs

Test Cycle : 1 cycle

Total Test Time : 192 hrs

(2) Temperature Test (Non-Operation)

Step	Temperature (°C)	Duration
1	100	96 hrs
2	-40	96 hrs

Test Cycle : 1 cycle

Total Test Time : 192 hrs


TEST RESULT :

Describe	PASS	FAIL	Non-Judgment
Function judgment	√	---	---
Appearance check	√	---	---

TESTING / INSPECTION REPORT

Testing photos


Operation

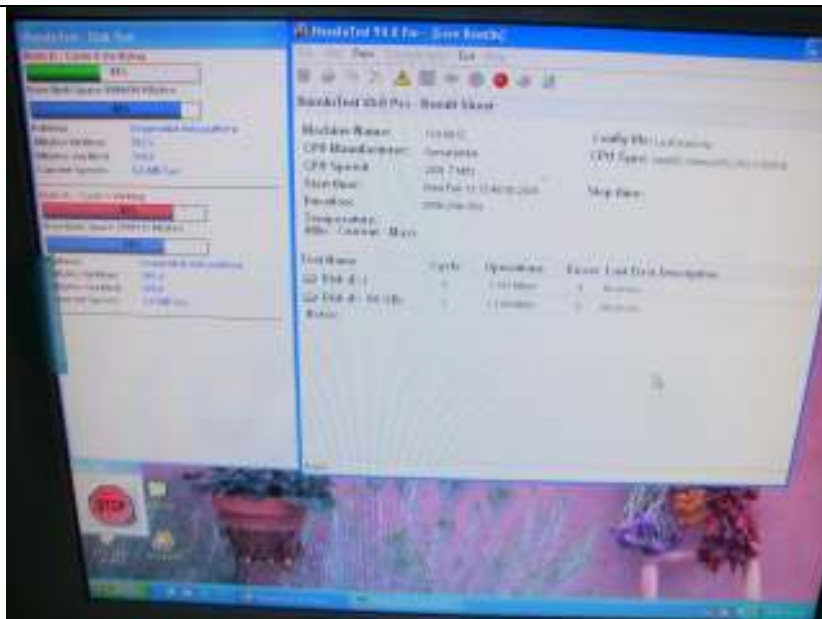

TESTING / INSPECTION REPORT

Testing photos


Operation

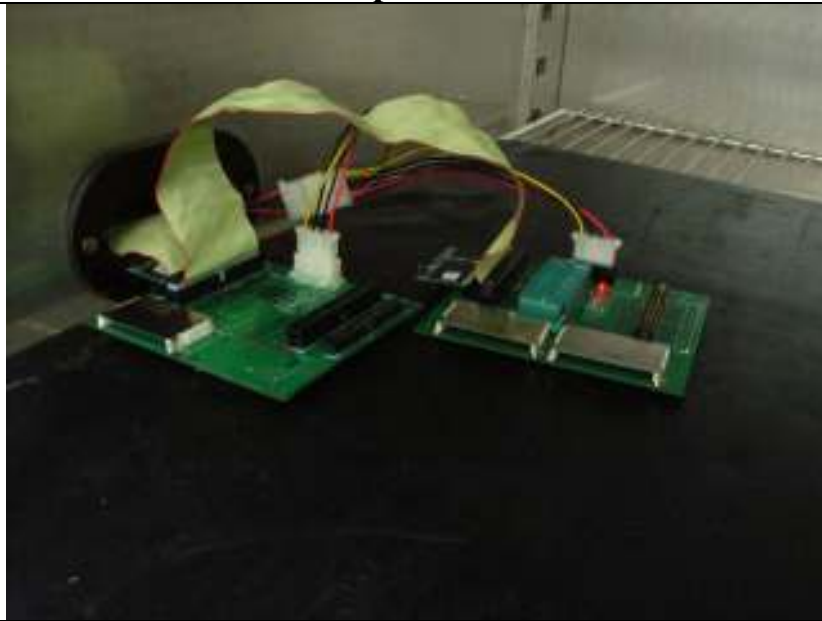

TESTING / INSPECTION REPORT

Testing photos

Non-Operation

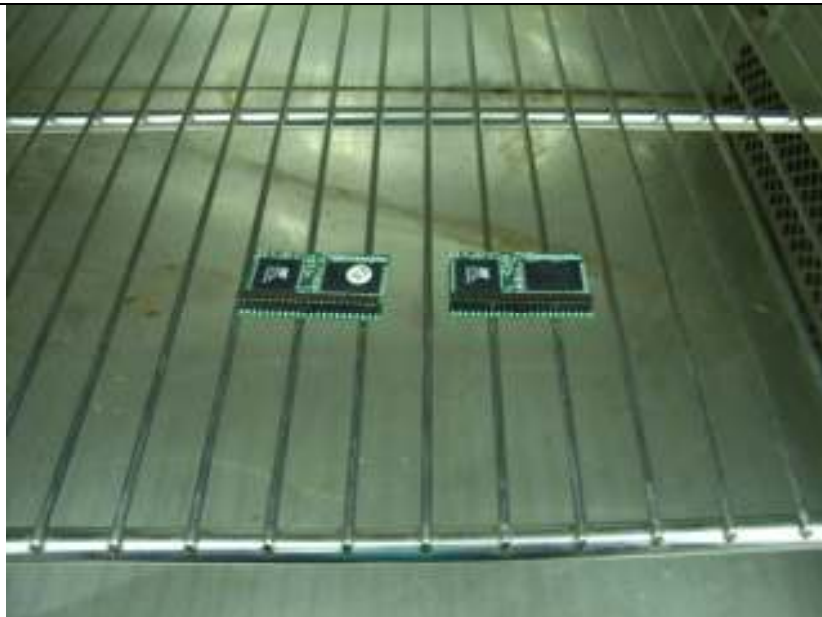


TESTING / INSPECTION REPORT


Testing photos

After test



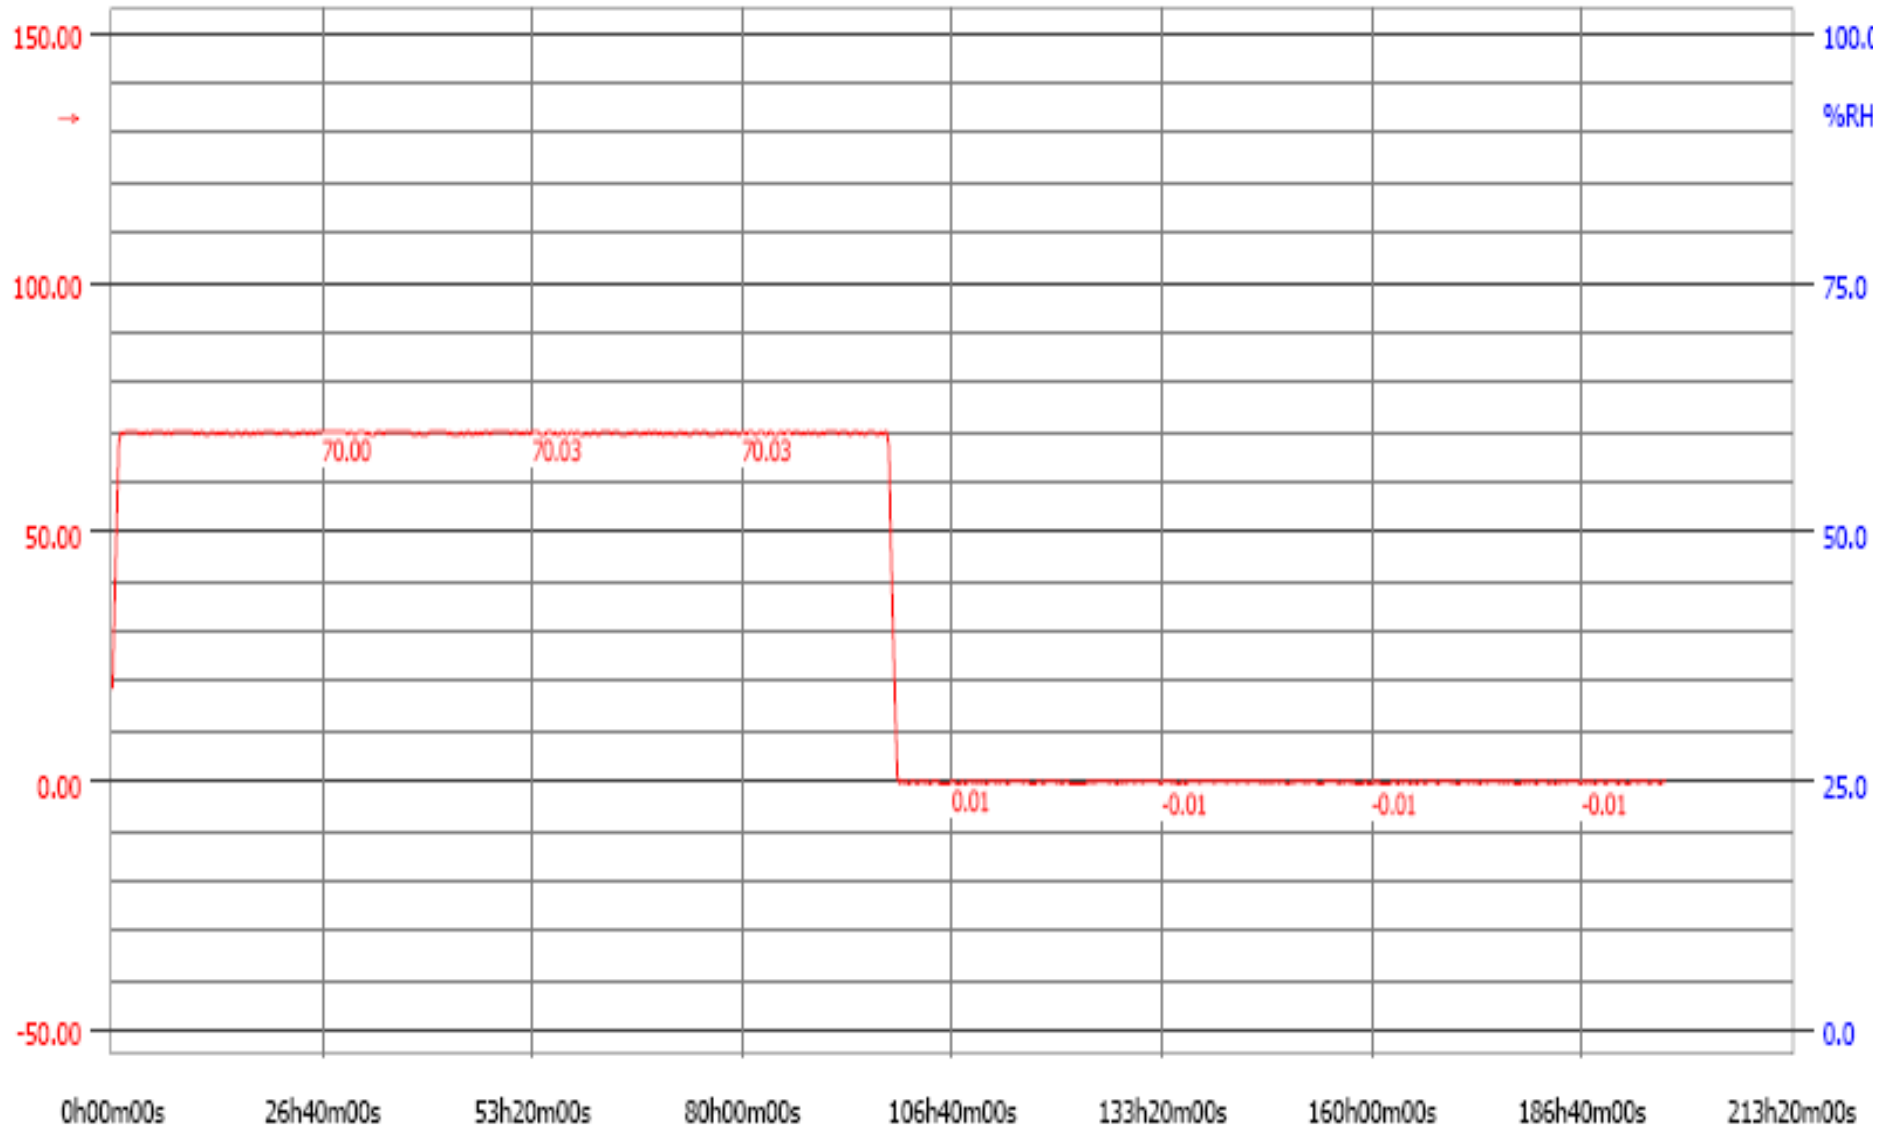

 - Temperature PV

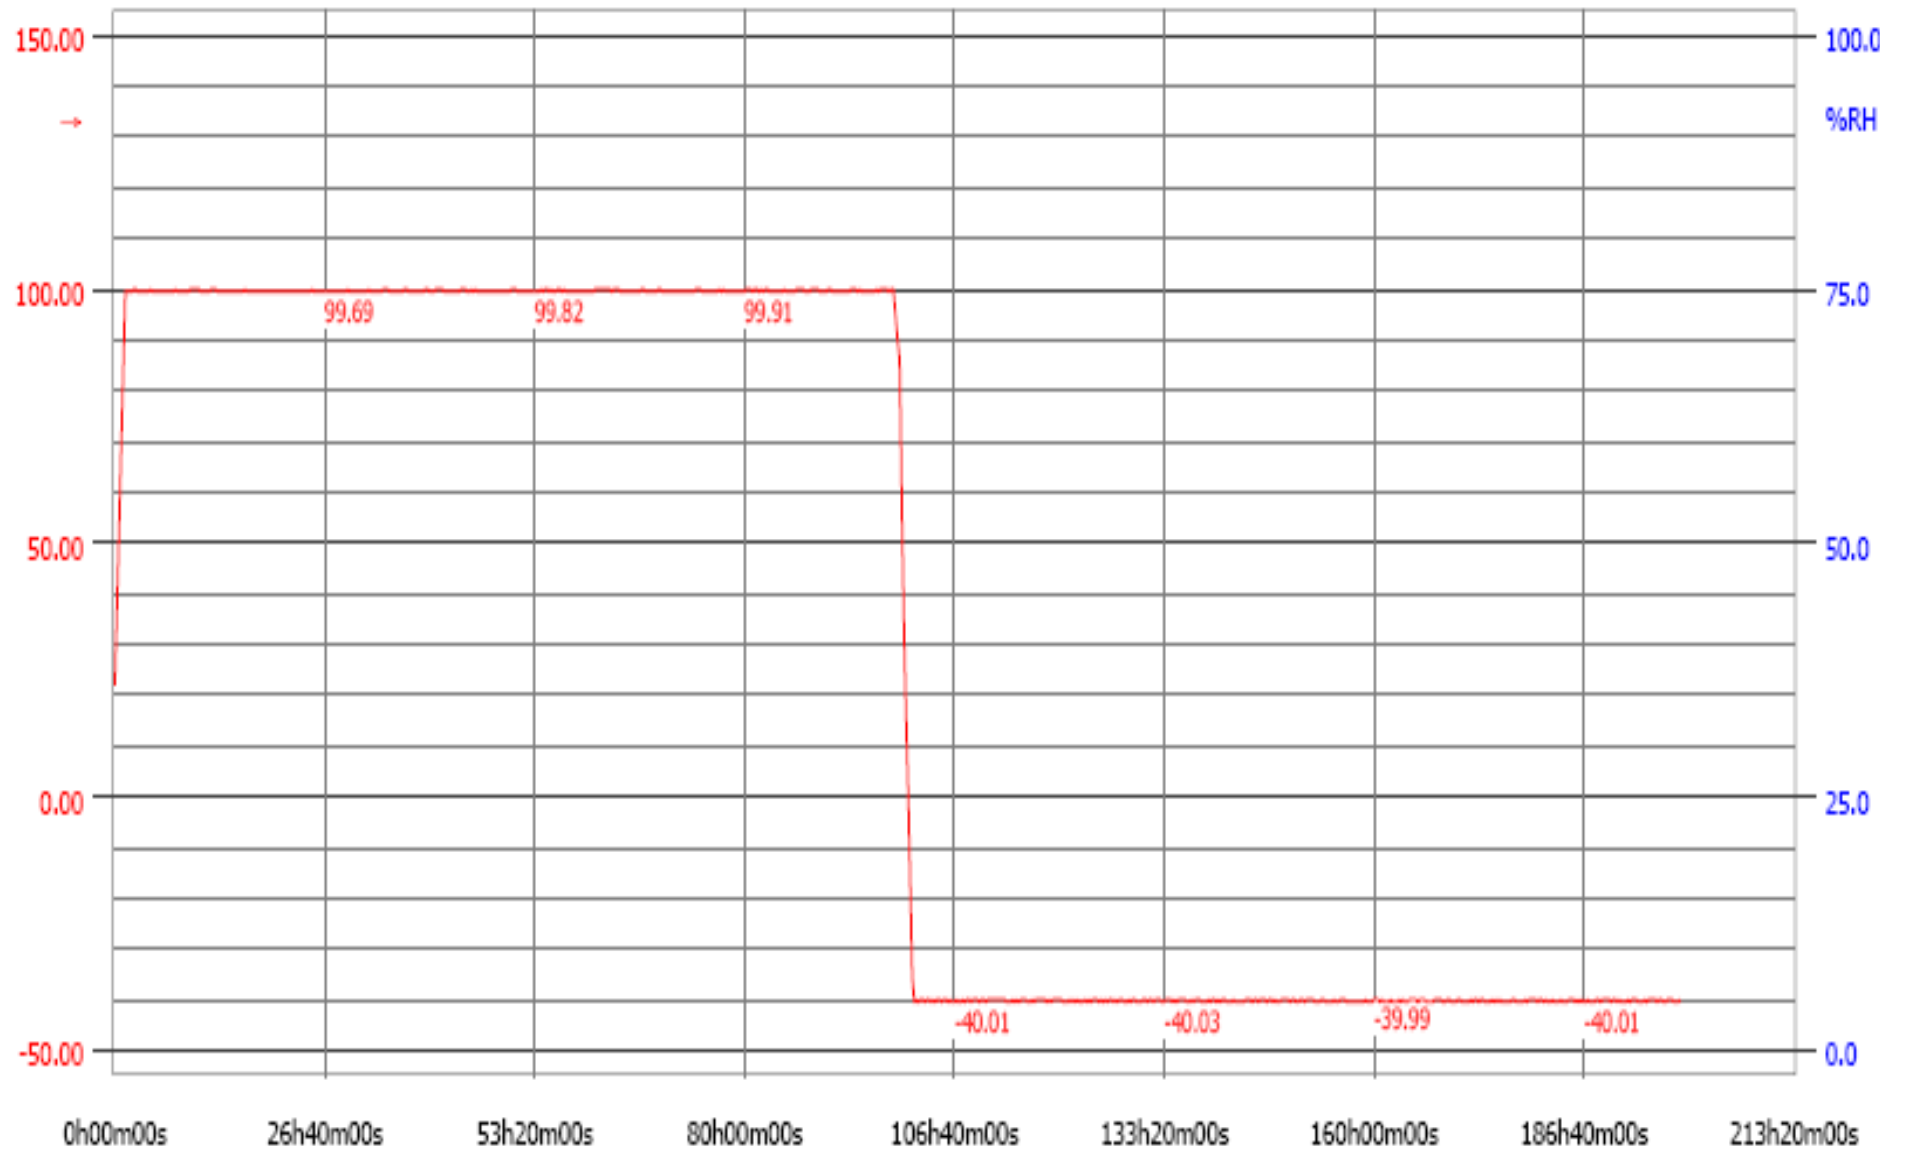

 - Temperature PV