


Data#: 3 File#: 80227207CA.EMI

Date: 2008-02-29 Time: 11:00:40

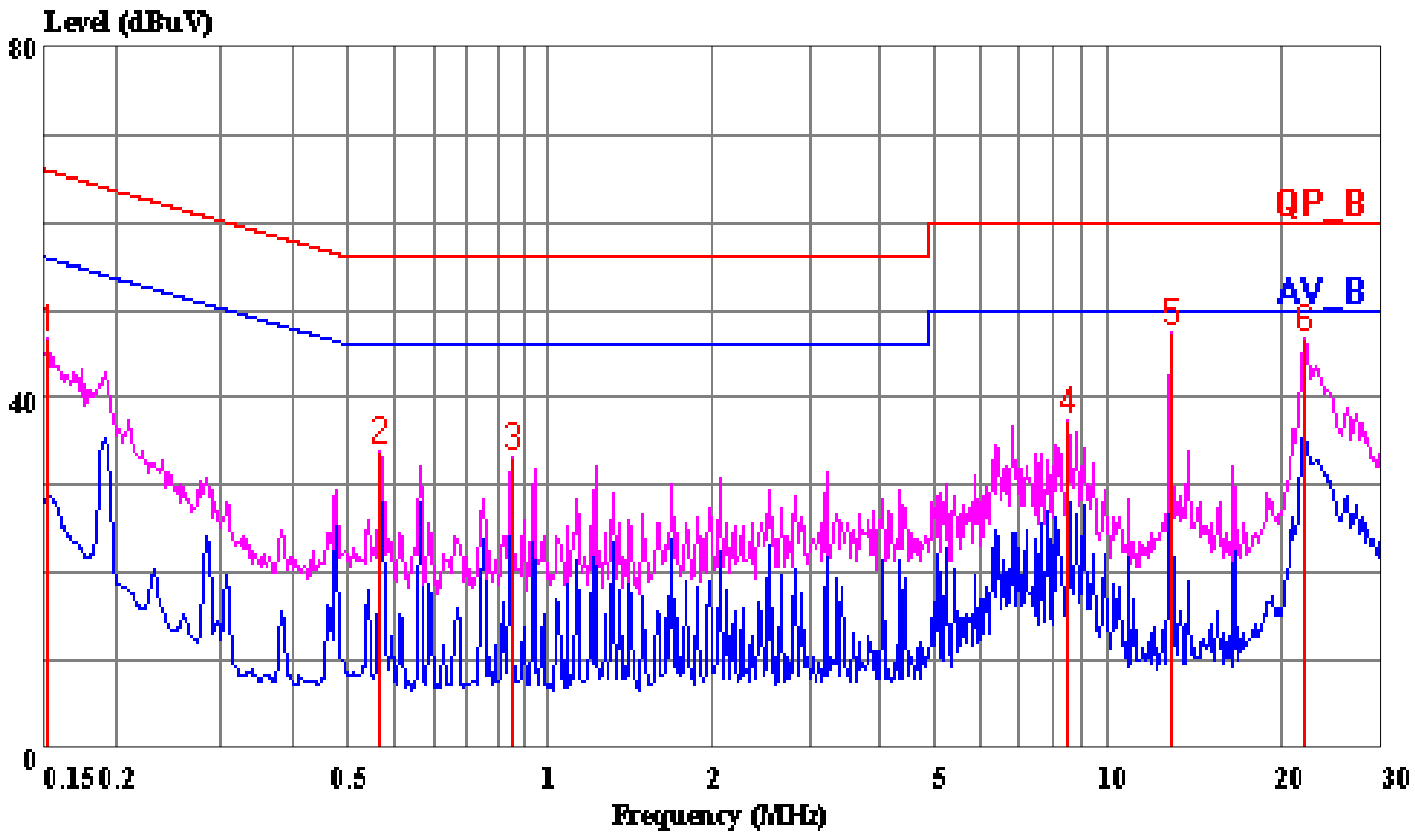

(Conduction A)

Trace: 2 1

Ref Trace:


Condition: LINE
Report No. : 80227207
Test Engr. : Jason Chia
Company : Apacer Technology Inc.
EUT : ADM III 40p
Test Config : EUT / ALL PERIPHERALS
Type of Test: EN 55022 CLASS B
Mode of Op. : Normal Mode

Page: 1

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	46.48	0.11	46.59	65.87	-19.27 Peak
2	0.567	33.88	0.14	34.02	56.00	-21.98 Peak
3	0.953	32.98	0.16	33.14	56.00	-22.86 Peak
4	8.637	36.74	0.72	37.46	60.00	-22.54 Peak
5	12.988	46.44	1.04	47.48	60.00	-12.52 Peak
6	21.946	45.03	1.64	46.67	60.00	-13.33 Peak

Data#: 6 File#: 80227207CA.EMI

Date: 2008-02-29 Time: 11:07:53

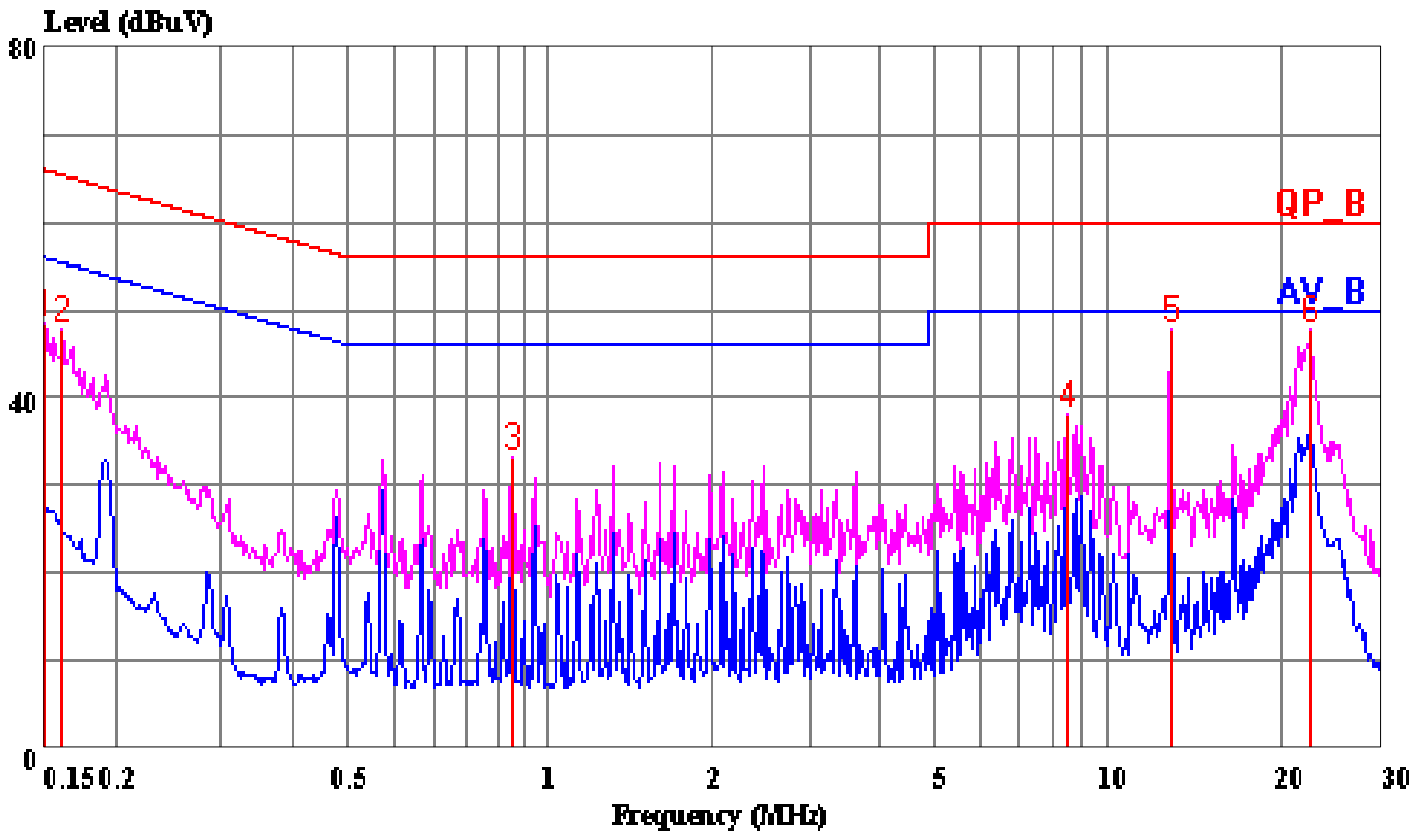

(Conduction A)

Trace: 5 4

Ref Trace:

Condition: NEUTRAL
Report No. : 80227207
Test Engr. : Jason Chia
Company : Apacer Technology Inc.
EUT : ADM III 40p
Test Config : EUT / ALL PERIPHERALS
Type of Test: EN 55022 CLASS B
Mode of Op. : Normal Mode

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.151	48.34	0.14	48.48	65.96	-17.48	Peak
2	0.161	47.58	0.13	47.71	65.43	-17.71	Peak
3	0.953	33.26	0.08	33.34	56.00	-22.66	Peak
4	8.592	37.28	0.80	38.08	60.00	-21.92	Peak
5	12.988	46.54	1.14	47.69	60.00	-12.31	Peak
6	22.535	45.92	1.79	47.71	60.00	-12.29	Peak



Job No.: 80227207

Standard: EN 55022 CLASS B

Test item: Radiation Test

Temp.()/Hum.(%): 16 / 78 %

Company: Apacer Technology Inc.

Trade Name: Apacer

Model: ADM III 40p

Polarization: Vertical

Power: 240VAC, 50Hz


Date: 2008/2/29

Time: PM 05:02:58

Engineer: Jason Chia

Distance: 10m

Test Mode/Description: Normal Mode

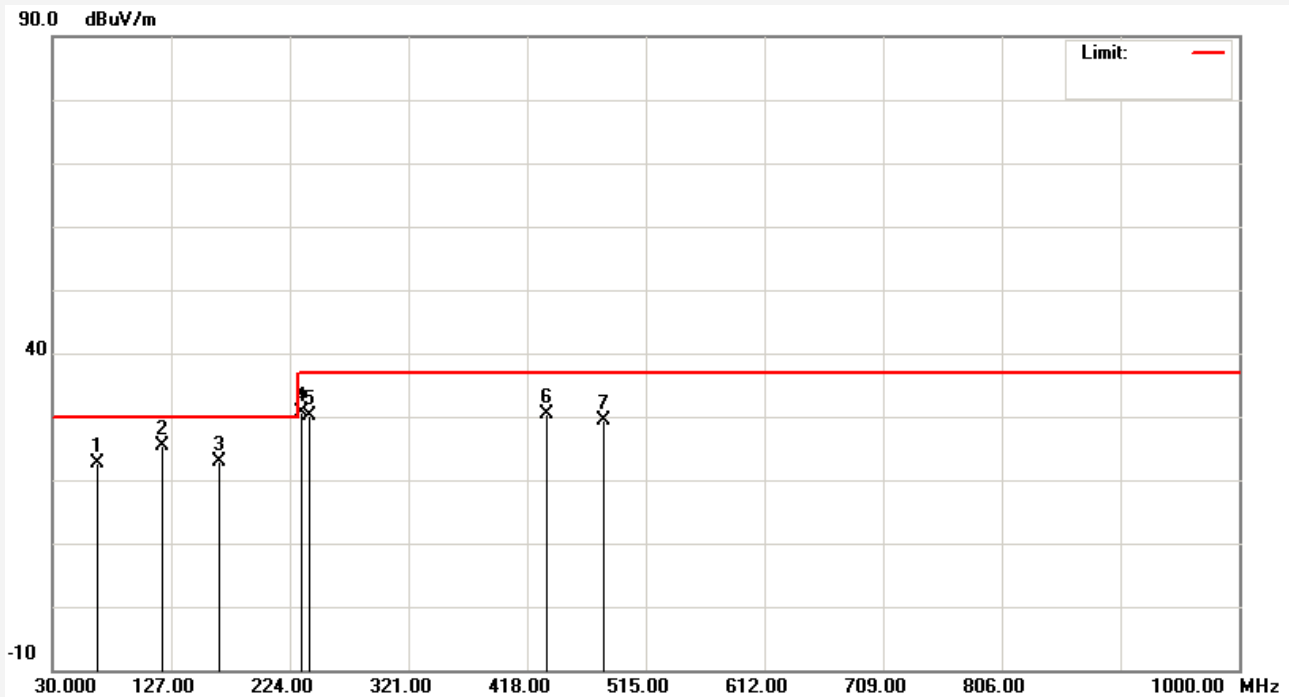

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	66.2500	38.60	-16.03	22.57	30.00	-7.43	QP	
2	120.0020	35.80	-10.32	25.48	30.00	-4.52	QP	
3	166.6600	34.50	-11.62	22.88	30.00	-7.12	QP	
4	233.6500	41.20	-10.46	30.74	37.00	-6.26	QP	
5	240.0000	40.20	-10.11	30.09	37.00	-6.91	QP	
6	433.5000	32.80	-2.46	30.34	37.00	-6.66	QP	
7	479.9980	31.60	-2.20	29.40	37.00	-7.60	QP	



Job No.: 80227207

Standard: EN 55022 CLASS B

Test item: Radiation Test

Temp.()/Hum.(%): 16 / 78 %

Company: Apacer Technology Inc.

Trade Name: Apacer

Model: ADM III 40p

Polarization: Horizontal

Power: 240VAC, 50Hz


Date: 2008/2/29

Time: PM 05:47:50

Engineer: Jason Chia

Distance: 10m

Test Mode/Description: Normal Mode

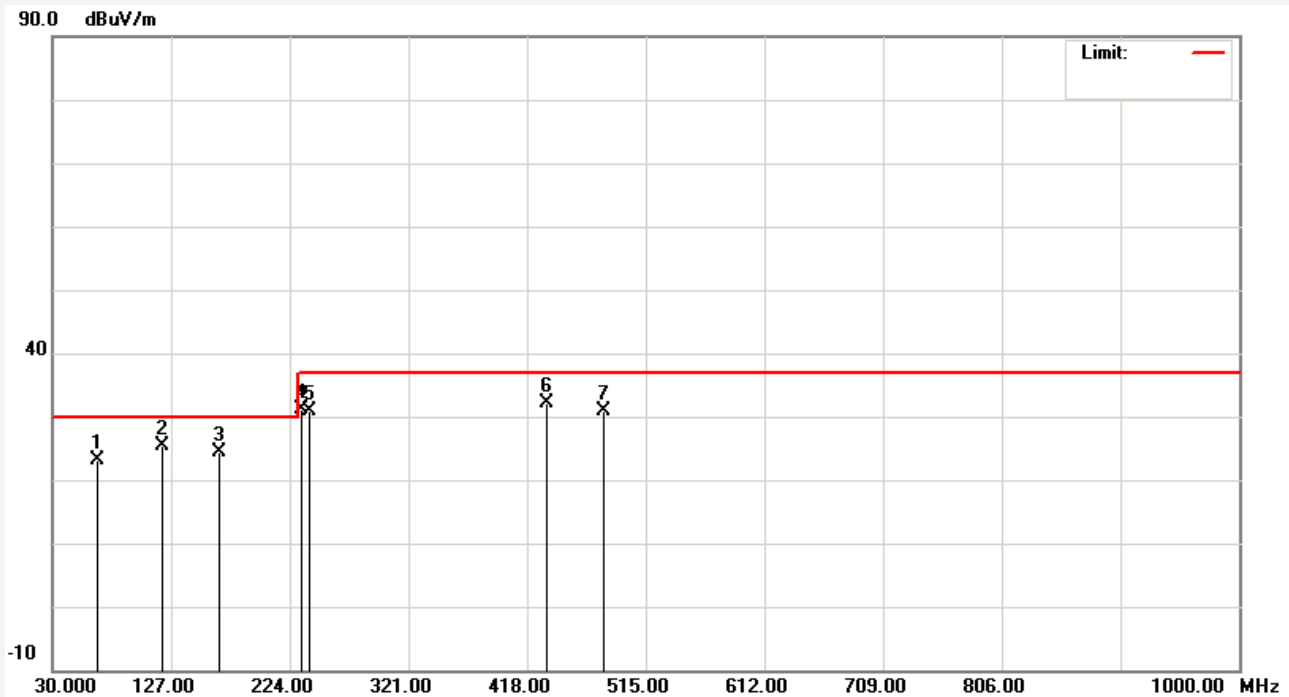

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	66.3200	39.20	-16.02	23.18	30.00	-6.82	QP	
2	120.0010	35.80	-10.32	25.48	30.00	-4.52	QP	
3	166.6500	36.00	-11.62	24.38	30.00	-5.62	QP	
4	233.4600	41.70	-10.47	31.23	37.00	-5.77	QP	
5	240.0020	40.90	-10.11	30.79	37.00	-6.21	QP	
6	433.4300	34.60	-2.46	32.14	37.00	-4.86	QP	
7	479.9980	33.20	-2.20	31.00	37.00	-6.00	QP	