



CERTIFICATE

Issued Date: Nov. 27, 2013
Report No.: 13B0432R-ITUSP03V00

This is to certify that the following designated product

Product : SATA Flash Drive
Trade name : Apacer
Model Number : SFD25A(-M) 7mm HighSpeed
Company Name : Apacer Technology Inc.

This product, which has been issued the test report listed as above in QuietTek Laboratory, is based on a single evaluation of one sample and confirmed to comply with the requirements of the following EMC standard.

FCC CFR Title 47 Part 15 Subpart B: 2012 Class B, CISPR 22: 2008
ANSI C63.4: 2009

TEST LABORATORY

Vincent Lin / Director

FCC Test Report

Product Name : SATA Flash Drive
Model No. : SFD25A(-M) 7mm HighSpeed

Applicant : Apacer Technology Inc.
Address : 1F., No.32, Zhongcheng Rd., Tucheng Dist., New Taipei
City 236, Taiwan (R.O.C)

Date of Receipt : 2013/11/21
Issued Date : 2013/11/27
Report No. : 13B0432R-ITUSP03V00
Report Version : V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the Government

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

FCC DECLARATION OF CONFORMITY

Per FCC Part 2 Section 2. 1077(a)

The following equipment:

Product : SATA Flash Drive
Trade name : Apacer
Model Number : SFD25A(-M) 7mm HighSpeed

It's herewith confirmed to comply with the requirements of FCC Part 15 Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

The result of electromagnetic emission has been evaluated by QuieTek EMC laboratory and showed in the test report.

(Report No. : 13B0432R-ITUSP03V00)

It is understood that each unit marketed is identical to the device as tested, and any changes to the device that could adversely affect the emission characteristics will require retest.

The following importer / manufacturer is responsible for this declaration:

Company Name _____
Company Address _____
Telephone _____ Facsimile : _____

Person is responsible for marking this declaration:

_____ Name (Full name)	_____ Position / Title
_____ Date	_____ Legal Signature

Test Report Certification

Issued Date : 2013/11/27

Report No. : 13B0432R-ITUSP03V00



Product Name : SATA Flash Drive
Applicant : Apacer Technology Inc.
Address : 1F., No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City
236, Taiwan (R.O.C)
Manufacturer : Apacer Technology Inc.
Model No. : SFD25A(-M) 7mm HighSpeed
EUT Rated Voltage : Power by PC
EUT Test Voltage : AC 120 V / 60 Hz
Trade Name : Apacer
Applicable Standard : FCC CFR Title 47 Part 15 Subpart B: 2012, Class B
CISPR 22: 2008, ANSI C63.4: 2009
Test Result : Complied
Performed Location : Quietek Corporation (Linkou Laboratory)
No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.
TEL:+866-2-8601-3788 / FAX:+886-2-8601-3789

Documented By : Anny Chou
(Adm. Specialist / Anny Chou)

Reviewed By : Wright Tsai
(Engineer / Wright Tsai)

Approved By : Vincent Lin
(Director / Vincent Lin)

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted (audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scopes:

Taiwan R.O.C.	:	BSMI, NCC, TAF
Norway	:	Nemko
USA	:	FCC
Japan	:	VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.

TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.

TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou (China) Testing Laboratory :

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou,China.

TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information	5
1.1. EUT Description.....	5
1.2. Mode of Operation	5
1.3. Tested System Details	6
1.4. Configuration of Tested System	7
1.5. EUT Exercise Software.....	8
2. Technical Test	9
2.1. Summary of Test Result.....	9
2.2. List of Test Equipment	10
2.3. Measurement Uncertainty.....	11
2.4. Test Environment.....	12
3. Conducted Emission	13
3.1. Test Specification	13
3.2. Test Setup.....	13
3.3. Limit	13
3.4. Test Procedure	14
3.5. Test Result	15
3.6. Test Photograph	21
4. Radiated Emission.....	22
4.1. Test Specification	22
4.2. Test Setup.....	22
4.3. Limit	23
4.4. Test Procedure	24
4.5. Test Result	25
4.6. Test Photograph	29
5. Attachment.....	31
EUT Photograph.....	31

1. General Information

1.1. EUT Description

Product Name	SATA Flash Drive
Trade Name	Apacer
Model No.	SFD25A(-M) 7mm HighSpeed

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Pre-Test Mode	
Mode 1: Normal Operation	
Final Test Mode	
Emission	Mode 1: Normal Operation

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Monitor	DELL	U2410f	CN-082WXD-72872-1AV-AD8L	Non-Shielded, 1.8m
2 PC	DELL	Vostro230	1R7Z62S	Non-Shielded, 1.8m
3 Printer	EPSON	StyLus C63	FAPY012396	Non-Shielded, 1.8m
4 Modem	ACEEX	DM-1414	0102027556	Non-Shielded, 1.8m
5 iPod nano	Apple	A1236	7K823DY0Y0P	N/A
6 Microphone & Earphone	Ergotech	ET-E201	N/A	N/A
7 Keyboard	Logitech	Y-SM46	867404-0121	N/A
8 Mouse	Logitech	M-SBM96B	810-000439	N/A

1.4. Configuration of Tested System

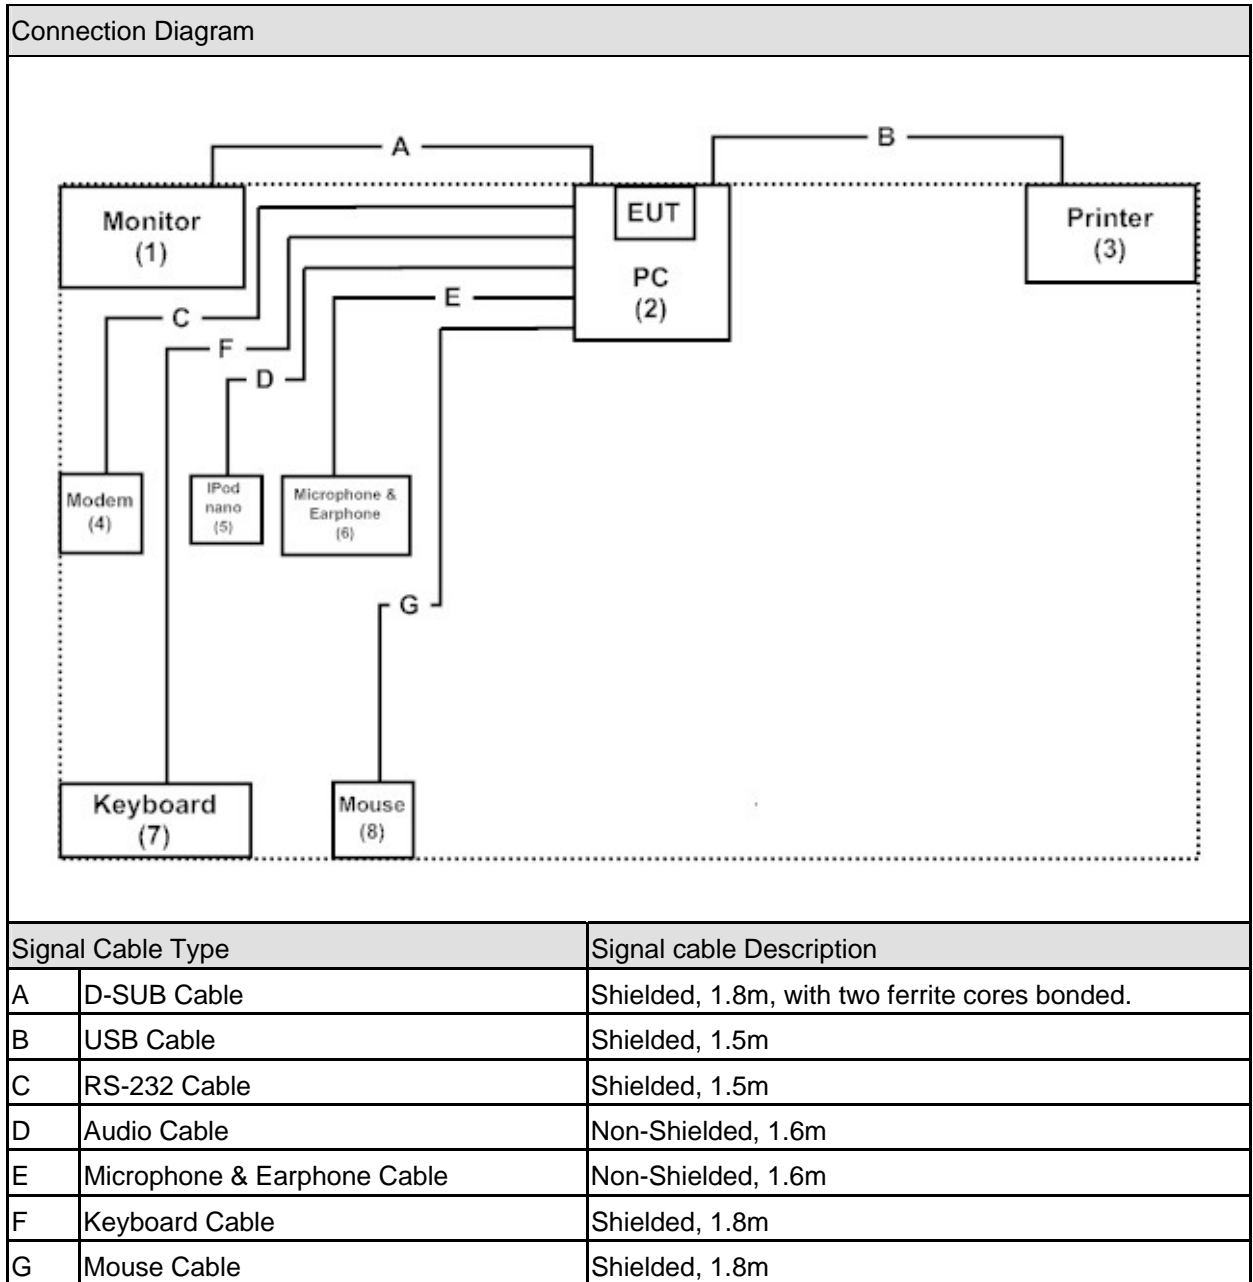

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on 1.4.
2	Turn on the power of all equipments.
3	All the features of the EUT operation normally.

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
- Deviations from the test standards as below description:

Emission			
Performed Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart B: 2012 Class B, ANSI C63.4: 2009	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart B: 2012 Class B, ANSI C63.4: 2009	Yes	No

2.2. List of Test Equipment

Conducted Emission / SR8

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
EMI Test Receiver	R&S	ESCS 30	100369	2013/09/14
LISN	R&S	ESH3-Z5	836679/017	2013/01/16
LISN	R&S	ENV216	100097	2013/01/16
Coaxial Cable	QTK(Arnist)	RG 400	LC018-RG	2013/06/26

Radiated Emission / Site7

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Bilog Antenna	Schaffner Chase	CBL6112B	2930	2013/05/06
EMI Test Receiver	R&S	ESCI	100649	2013/04/18
Coaxial Cable	QTK(Arnist)	RG 214	LC007-RG	2013/06/23
Site7 NSA	QTK	N/A	N/A	2013/06/23
Pre-Amplifier	QTK	AP/0100A	CHM/1009094	2013/06/23

Radiated Emission / CB7

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
EMI Test Receiver	R&S	ESU26	100433	2013/07/29
Horn Antenna	ETS-Lindgren	3117	00135205	2013/03/26
Horn Antenna	SCHWARZBECK	9120D	576	2013/11/19
Pre-Amplifier	Quietek	AP-180C	CHM/071920	2013/06/24
CB7 VSWR	QTK	N/A	N/A	2013/07/25

2.3. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.19 dB.

2.4. Test Environment


Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	15-35	23
	Humidity (%RH)	25-75	59
	Barometric pressure (mbar)	860-1060	950-1000
Radiated Emission	Temperature (°C)	15-35	22.8
	Humidity (%RH)	25-75	61
	Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission

3.1. Test Specification

According to Standard : FCC Part 15 Subpart B, ANSI C63.4

3.2. Test Setup

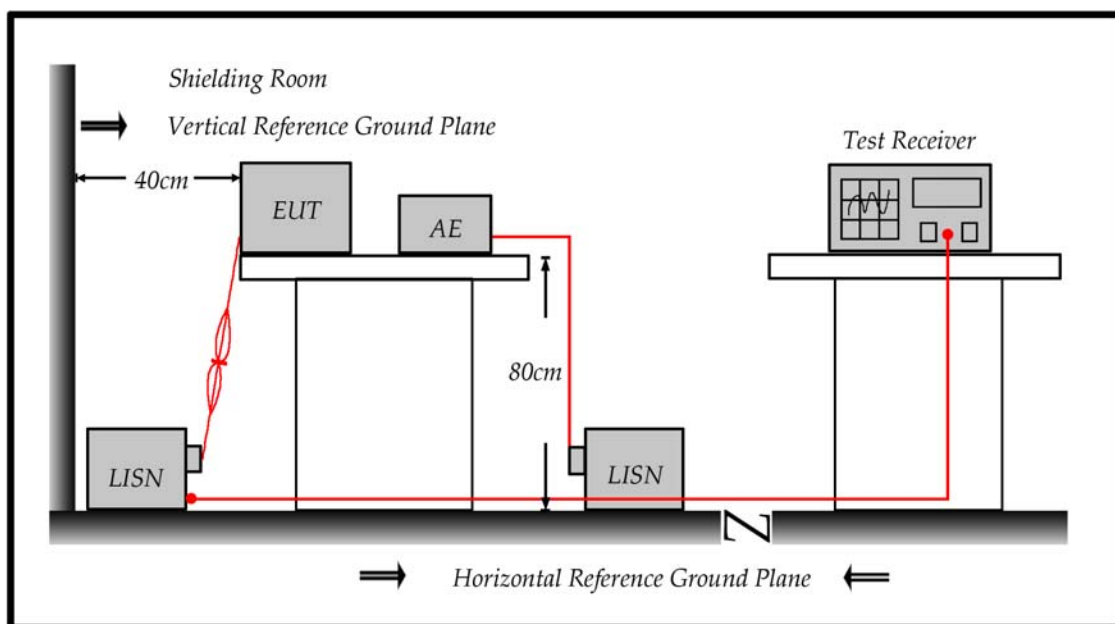

3.3. Limit

Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.


(Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.


Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Test Result

Site : SR8	Time : 2013/11/22 - 14:00
Limit : CISPR_B_00M_QP	Margin : 10
EUT : SATA Flash Drive	Probe : ENV216_L1 - Line1
Power : AC 120V/60Hz	Note : Mode 1

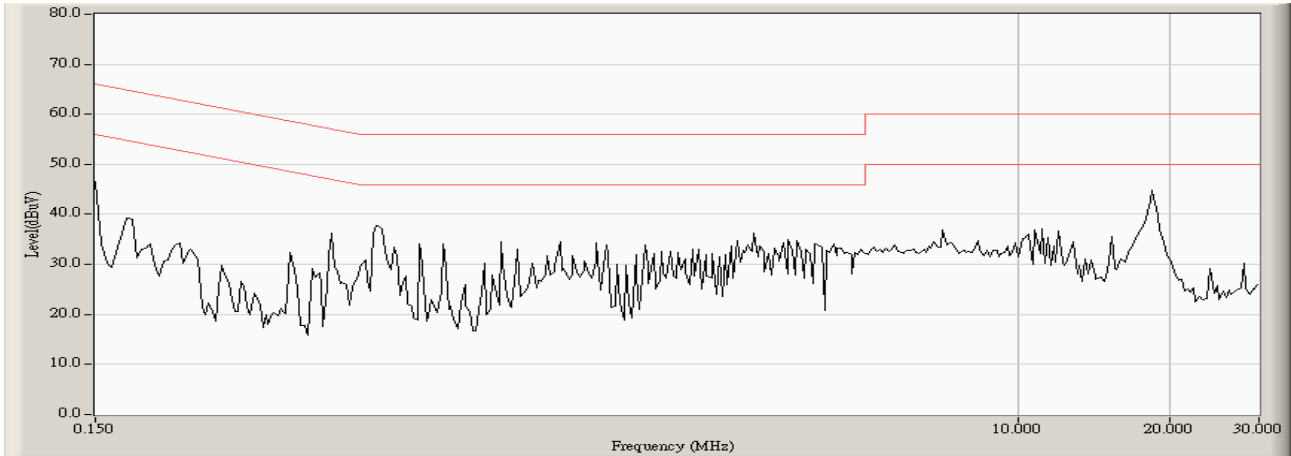

Site : SR8	Time : 2013/11/22 - 14:01
Limit : CISPR_B_00M_QP	Margin : 0
EUT : SATA Flash Drive	Probe : ENV216_L1 - Line1
Power : AC 120V/60Hz	Note : Mode 1

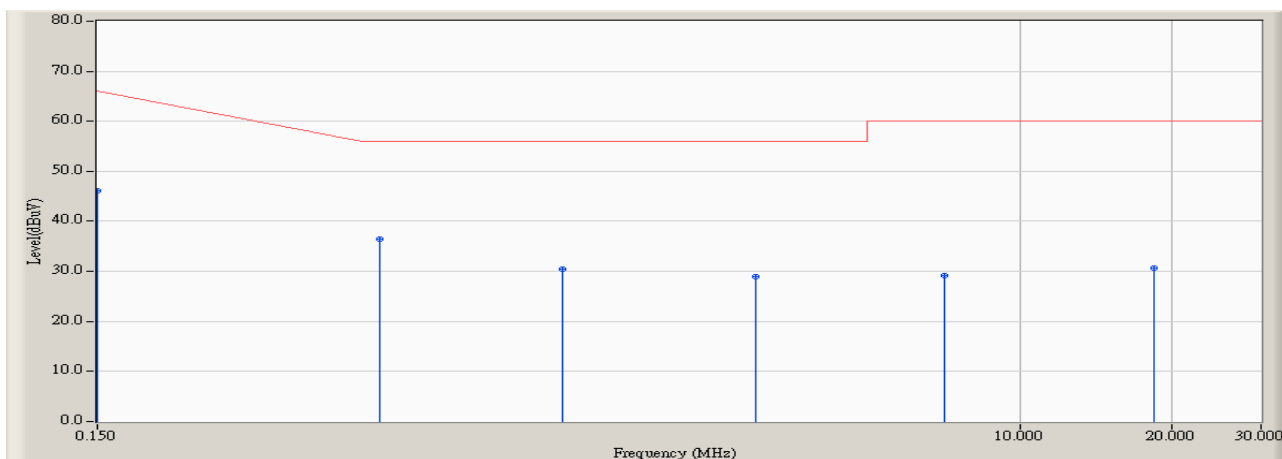


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.150	9.696	36.440	46.136	-19.864	66.000	QUASPEAK
2	*	0.541	9.714	26.810	36.524	-19.476	56.000	QUASPEAK
3		1.244	9.748	20.680	30.428	-25.572	56.000	QUASPEAK
4		3.002	9.818	19.150	28.968	-27.032	56.000	QUASPEAK
5		7.111	9.850	19.280	29.130	-30.870	60.000	QUASPEAK
6		18.404	9.910	20.860	30.770	-29.230	60.000	QUASPEAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR8	Time : 2013/11/22 - 14:01
Limit : CISPR_B_00M_AV	Margin : 0
EUT : SATA Flash Drive	Probe : ENV216_L1 - Line1
Power : AC 120V/60Hz	Note : Mode 1

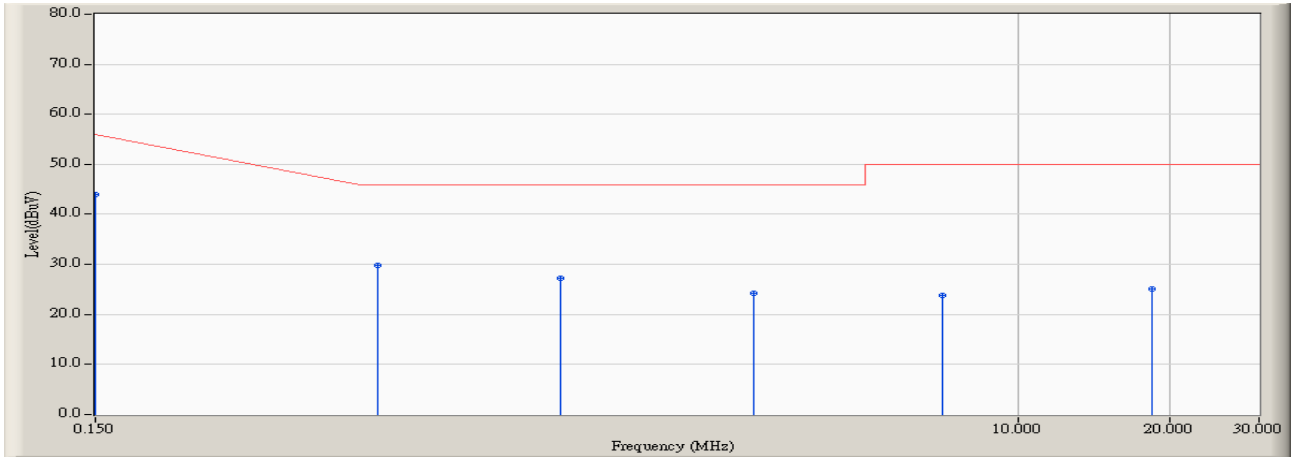


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.150	9.696	34.340	44.036	-11.964	56.000	AVERAGE
2		0.541	9.714	20.180	29.894	-16.106	46.000	AVERAGE
3		1.244	9.748	17.390	27.138	-18.862	46.000	AVERAGE
4		3.002	9.818	14.420	24.238	-21.762	46.000	AVERAGE
5		7.111	9.850	13.940	23.790	-26.210	50.000	AVERAGE
6		18.404	9.910	15.140	25.050	-24.950	50.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR8	Time : 2013/11/22 - 14:02
Limit : CISPR_B_00M_QP	Margin : 10
EUT : SATA Flash Drive	Probe : ENV216_N - Line2
Power : AC 120V/60Hz	Note : Mode 1

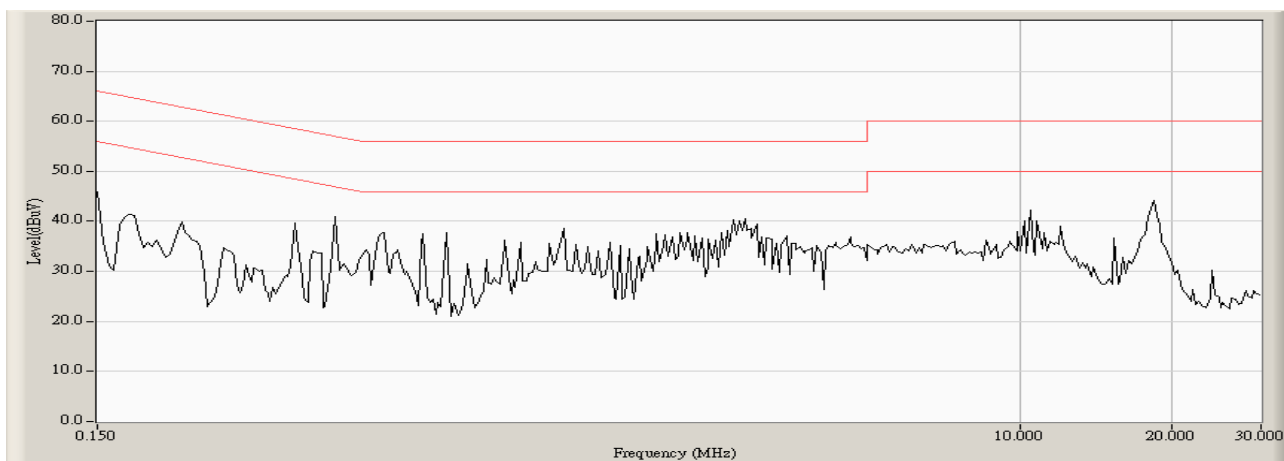

Site : SR8	Time : 2013/11/22 - 14:02
Limit : CISPR_B_00M_QP	Margin : 0
EUT : SATA Flash Drive	Probe : ENV216_N - Line2
Power : AC 120V/60Hz	Note : Mode 1

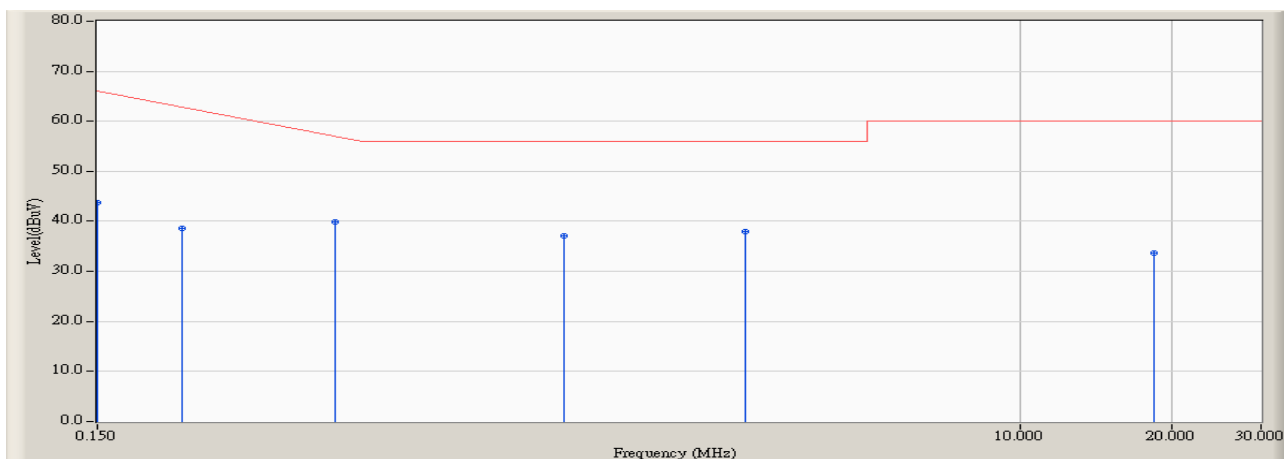


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.150	9.676	34.050	43.726	-22.274	66.000	QUASIPeAK
2		0.220	9.680	28.830	38.510	-25.490	64.000	QUASIPeAK
3	*	0.443	9.690	30.100	39.790	-17.839	57.629	QUASIPeAK
4		1.252	9.736	27.330	37.066	-18.934	56.000	QUASIPeAK
5		2.869	9.800	28.200	38.000	-18.000	56.000	QUASIPeAK
6		18.459	10.000	23.750	33.750	-26.250	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR8	Time : 2013/11/22 - 14:02
Limit : CISPR_B_00M_AV	Margin : 0
EUT : SATA Flash Drive	Probe : ENV216_N - Line2
Power : AC 120V/60Hz	Note : Mode 1

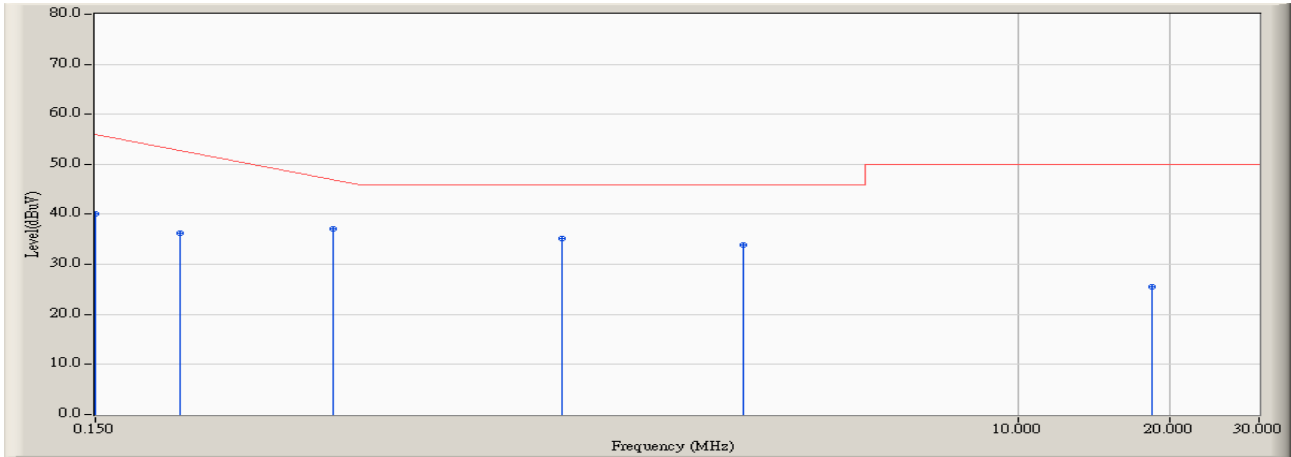

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.150	9.676	30.340	40.016	-15.984	56.000	AVERAGE
2		0.220	9.680	26.600	36.280	-17.720	54.000	AVERAGE
3	*	0.443	9.690	27.410	37.100	-10.529	47.629	AVERAGE
4		1.252	9.736	25.340	35.076	-10.924	46.000	AVERAGE
5		2.869	9.800	24.150	33.950	-12.050	46.000	AVERAGE
6		18.459	10.000	15.520	25.520	-24.480	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3.6. Test Photograph

Test Mode : Mode 1: Normal Operation

Description : Front View of Conducted Test



Test Mode : Mode 1: Normal Operation

Description : Back View of Conducted Test




4. Radiated Emission

4.1. Test Specification


According to EMC Standard : FCC Part 15 Subpart B, ANSI C63.4

4.2. Test Setup

Under 1GHz Test Setup:

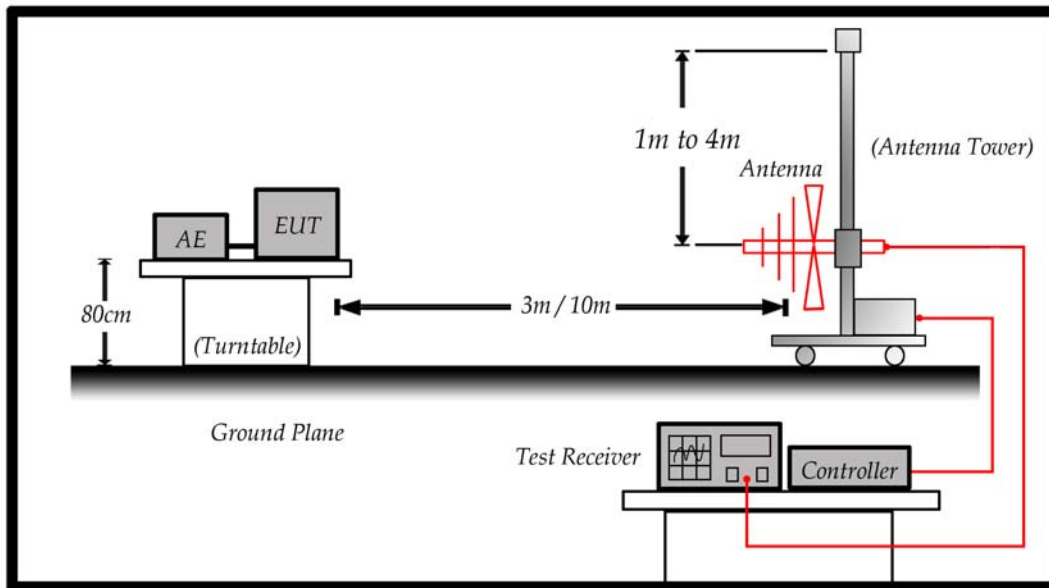

Above 1GHz Test Setup:

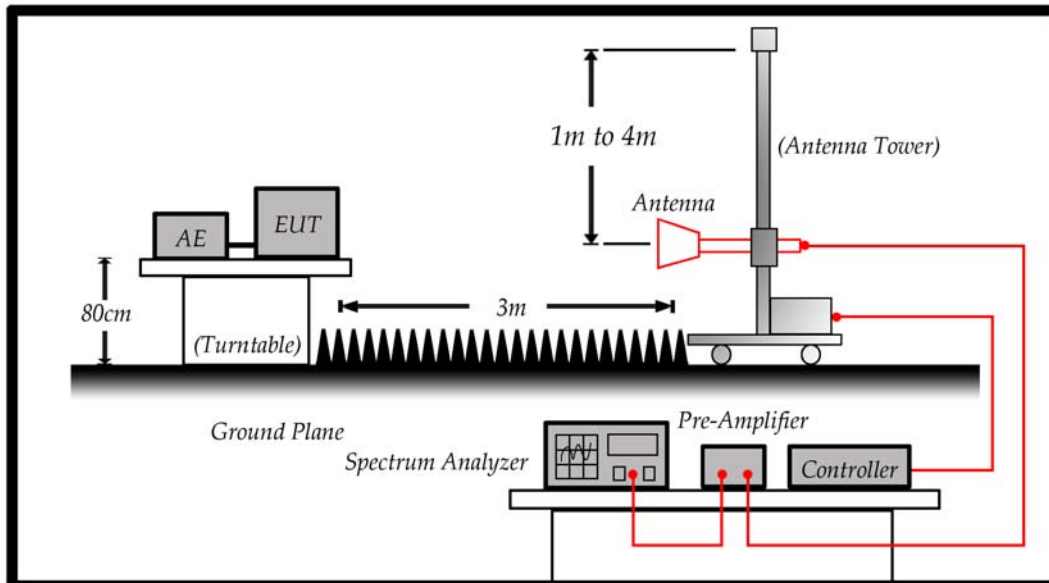

4.3. Limit

Under 1GHz test shall not exceed the following value:

Limits		
Frequency (MHz)	Distance (m)	dBuV/m
30 – 230	10	30
230 – 1000	10	37

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Above 1GHz test shall not exceed the following value:

FCC Part 15 Subpart B Paragraph 15.109 Limits (dBuV/m)		
Frequency (MHz)	Distance (m)	dBuV/m
30-88	3	40
88-216	3	43.5
216-960	3	46
Above 960	3	54

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground.

The turn table can rotate 360 degrees to determine the position of the maximum emission level and the antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

On any frequency or frequencies below or equal to 1000 MHz, the radiated limits shown are based on measuring equipment employing a quasi-peak detector function and above 1000 MHz, the radiated limits shown are based measuring equipment employing an average detector function.

When average radiated emission measurement are included emission measurement Above 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.


For class A, the measurement distance between the EUT and antenna is 10 meters for under 1GHz and above 1GHz.

For class B, the measurement distance between the EUT and antenna is 10 meters for under 1GHz and 3 meters for above 1GHz.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz and above 1GHz is 1MHz.

4.5. Test Result

Site : Site7	Time : 2013/11/22 - 15:46
Limit : CISPR_B_10M_QP	Margin : 6
EUT : SATA Flash Drive	Probe : Site7_CBL6112_10M_1307 - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1

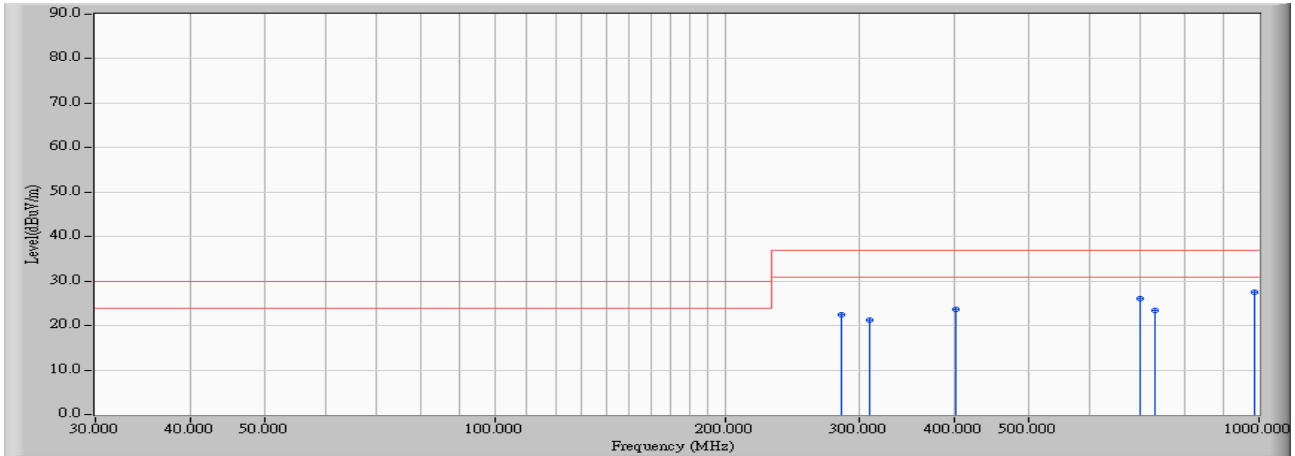


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		283.600	-15.257	37.800	22.543	-14.457	37.000	QUASPEAK
2		309.500	-14.655	35.850	21.196	-15.804	37.000	QUASPEAK
3		401.800	-11.438	35.200	23.762	-13.238	37.000	QUASPEAK
4		698.400	-6.791	32.800	26.009	-10.991	37.000	QUASPEAK
5		730.800	-5.696	29.100	23.404	-13.596	37.000	QUASPEAK
6	*	987.360	-2.000	29.600	27.600	-9.400	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : Site7	Time : 2013/11/22 - 16:03
Limit : CISPR_B_10M_QP	Margin : 6
EUT : SATA Flash Drive	Probe : Site7_CBL6112_10M_1307 - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1

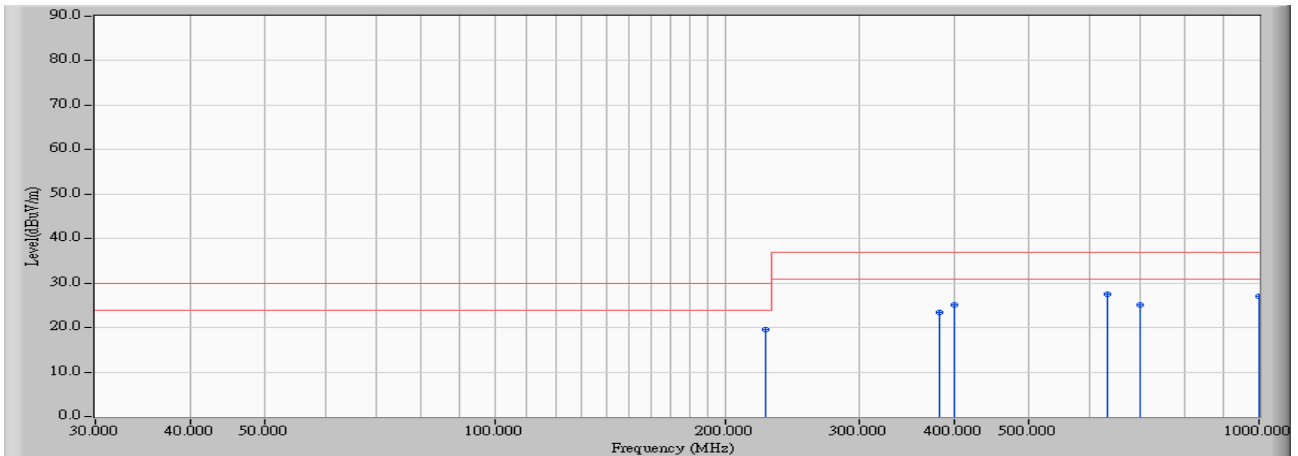


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		226.000	-19.122	38.600	19.478	-10.522	30.000	QUASPEAK
2		381.050	-12.124	35.560	23.436	-13.564	37.000	QUASPEAK
3		400.000	-11.497	36.500	25.003	-11.997	37.000	QUASPEAK
4	*	632.000	-6.594	34.000	27.406	-9.594	37.000	QUASPEAK
5		699.600	-6.797	32.000	25.203	-11.797	37.000	QUASPEAK
6		999.510	-1.810	28.950	27.140	-9.860	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site: CB7	Time: 2013/11/22 - 19:05
Limit: FCC_B_(Above_1G)	Margin: 0
Probe: CB7_Horn_9120D_1302	Polarity: Horizontal
EUT : SATA Flash Drive	Power : AC 120V/60Hz
Note : Mode 1	

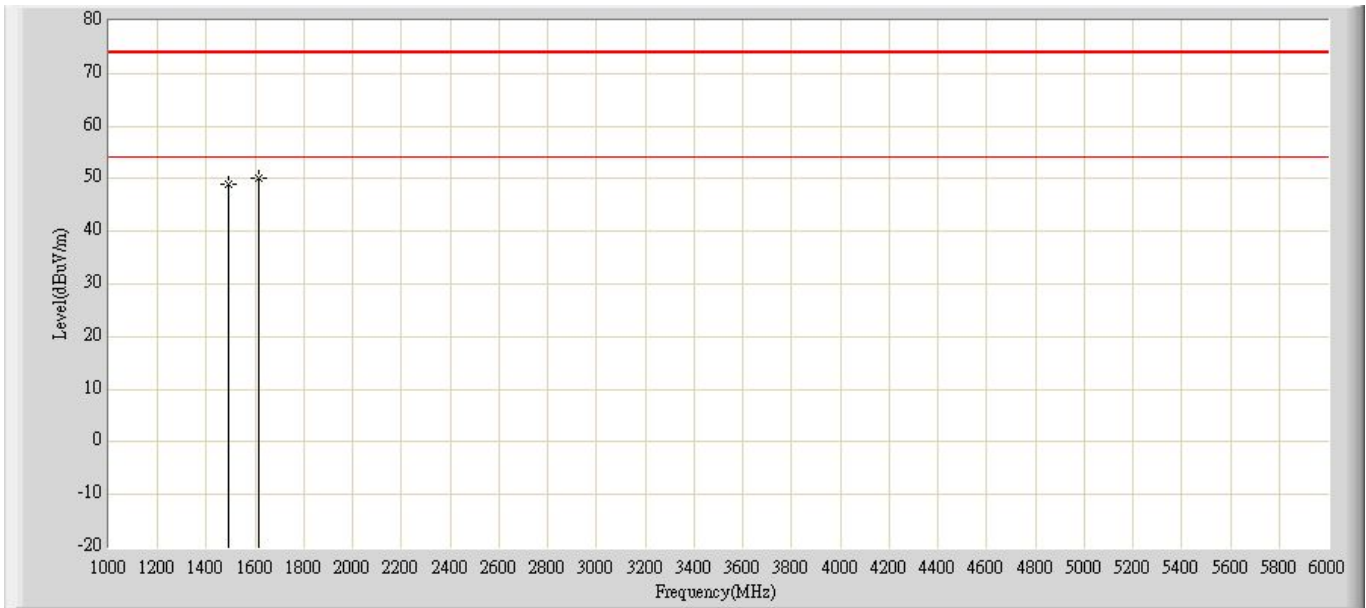


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1492.000	48.860	53.140	-25.140	74.000	-4.280	PK
2		*	1617.000	50.006	53.990	-23.994	74.000	-3.984	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: CB7	Time: 2013/11/22 - 19:06
Limit: FCC_B_(Above_1G)	Margin: 0
Probe: CB7_Horn_9120D_1302	Polarity: Vertical
EUT : SATA Flash Drive	Power : AC 120V/60Hz
Note : Mode 1	

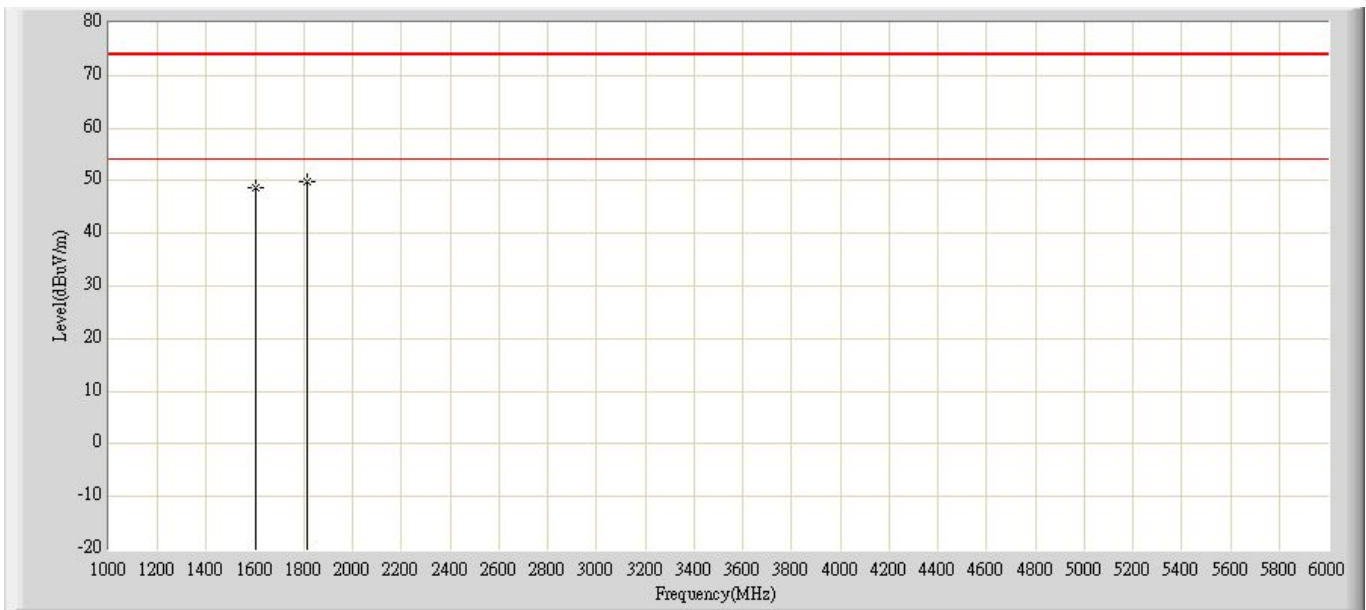

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1603.000	48.745	52.680	-25.255	74.000	-3.935	PK
2		*	1810.000	49.961	53.440	-24.039	74.000	-3.479	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.6. Test Photograph

Test Mode : Mode 1: Normal Operation

Description : Front View of Radiated Test



Test Mode : Mode 1: Normal Operation

Description : Back View of Radiated Test



Test Mode : Mode 1: Normal Operation

Description : Front View of High Frequency Radiated Test



5. Attachment

➤ EUT Photograph

(1) EUT Photo



(2) EUT Photo

