

MTBF

Report of Apacer products, Flash Card & USB SSD Series

Mar, 2016

Version 2.2



Apacer Technology Inc.

1F, No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City 236, Taiwan(R.O.C)


Tel:+886-2-2698-2888

Fax:+886-2-2698-2889

MTBF

OVERVIEW

MTBF, stands for mean time between failures, is the average time between failures of hardware modules. It is the average time a manufacturer estimates before a failure occurs in a hardware module.

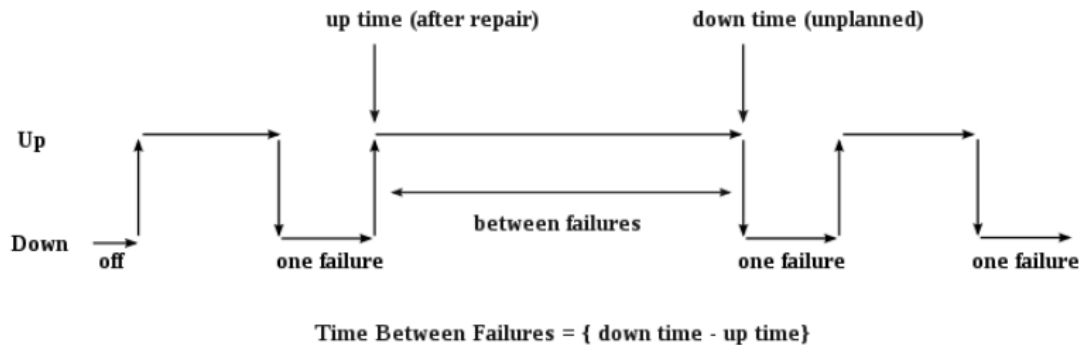

*This figure depicts the background of MTBF calculation and is granted by its author to anyone using this work for any purpose. For further detail, refer to http://en.wikipedia.org/wiki/File:Time_between_failures.svg

In above figure, downtime is the momentary period it went down uptime. The difference of downtime subtracts by uptime is the amount of time between the two events, which is the time between failures.

MTBF plays an important role in the development of products. Engineers of reliability and design engineers often utilize reliability applications to figure out a product's MTBF according to various methods/standards and to put efforts on the yield rate in the production.

MTBF PREDICTION

Apacer's MTBF prediction adopts and complies with Bellcore analysis method 1. Assuming device failure rate can be generated by the sum of failure rates in each component, then, a steady state failure rate can be expressed as below equation.

$$\lambda_{SS} = \pi_E \sum_{i=1}^m (N_i \lambda_{SSi})$$

m : number of component types

λ_{SS} : device failure rate at steady state

N_i : quantity of i type component

λ_{SSi} : failure rate for i type component at steady state

π_E : device environment factor

PROCEDURE OF MTBF CALCULATION

1. Collect characteristic information of the product.
2. Prepare bill of material (BOM) and component specifications.
3. Analyze BOM and produce component parameters.
4. Determine calculation equation for every component.
5. Calculate failure rates of each component.
6. Generate product failure rate and MTBF.

CALCULATED MTBF (HOURS) BY PRODUCTS

No.	Project	MTBF(hr)
1	CFIII	$\geq 1.93 \times 10^6$
2	ATA CF	$\geq 2.02 \times 10^6$
3	UDMII	$\geq 2.50 \times 10^6$
4	Industrial SD	$\geq 1.77 \times 10^6$
5	UDM2 Plus (-M)	$\geq 3.29 \times 10^6$
6	CFast (-M)	$\geq 1.84 \times 10^6$
7	UDM3	$\geq 3.05 \times 10^6$
8	Industrial CF5	$\geq 1.64 \times 10^6$
9	SD (-M)	$\geq 1.77 \times 10^6$
10	mPDM (-M)	$\geq 2.17 \times 10^6$
11	AH321 (-M)	$\geq 3.59 \times 10^6$
12	AH322 (-M)	$\geq 3.59 \times 10^6$
13	EH353 (-M)	$\geq 5.82 \times 10^6$
14	UDM 3.0 1U (-M)	$\geq 3.86 \times 10^6$
15	Industrial CF6	$\geq 1.17 \times 10^6$

REVISION HISTORY

Revision	Date	Description	Remark
0.1	Aug 19, 2009	Preliminary release	
1.0	Aug 19, 2009	Formal version release	
1.1	Nov 23, 2009	Update Industrial CF4/CompactFlash4 MTBF	
1.2	Dec 09, 2009	Update references source	
1.3	Jul 22, 2011	Update MTBF for Industrial SD, UDM2 Plus, CFast,	
1.4	Feb 14, 2012	Update MTBF for UDM3	
1.5	Mar 09, 2012	Update MTBF for CompactFlash 5, Industrial CF5	
1.6	Mar 23, 2012	Update MTBF for SD-M	
1.7	Jul 11, 2012	Update MTBF/F.R for CFast2/4(GB)	
1.8	Oct 02, 2012	Update MTBF for mPDM/mPDM-M/AH321/AH321-M/ AH322/AH322-M	
1.9	Sep 24, 2013	Update MTBF for CFIII/Industrial CF5	
2.0	Dec 25, 2014	Delete EOL products for Commercial CF / Industrial CF4 / CompactFlash4 / CompactFlash5	
2.1	May 26, 2015	Update MTBF for EH353(-M)/ UDM 3.0 1U(-M)	
2.2	Mar 5, 2015	Update MTBF for Industrial CF6/CompactFlash6	

Apacer Technology Inc.

1 F., No.32, Zhongcheng Rd., Tucheng Dist.,
New Taipei City 236, Taiwan (R.O.C)
Tel: +886-2-2267-8000 Fax: +886-2-2267-2261
www.apacer.com

Copyright © 2013 Apacer Technology Inc. All Rights Reserved.
Information in this document is subject to change without prior notice.
Apacer and the Apacer logo are trademarks or registered trademarks of
Apacer Technology Inc. Other brands, names, trademarks or registered
trademarks may be claimed as the property of their respective o