

KING DESIGN INDUSTRIAL CO., LTD.

VIBRATION TEST LABORATORY

4F, NO. 3, Lane 270, Pei Shen Road Sec. 3,

<http://www.kdi.tw>

Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C

<http://www.vibration.com.tw>

TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

E-mail: [service@kdi.tw](mailto:service@kdi.tw)

## TESTING / INSPECTION REPORT

REPORT NO : VT-190708-1

COMPANY : Apacer Technology Inc.  
 ADDRESS : 1F., No.32, Zhongcheng Rd., Tucheng Dist.,  
 New Taipei City 236, Taiwan (R.O.C)  
 TEL : 886-2-2267-8000  
 FAX : 886-2-2267-2261  
 SPECIMEN : SATA Flash Drive  
 DATE OF RECEIVED : 2017/07/19  
 DATE OF TESTED : 2017/07/24

TEST / INSPECTION ITEMS : Vibration / Shock

### REMARKS :

- The laboratory is accredited by ISO/IEC 17025 General Requirements for the Competence of Calibration and Testing Laboratory.
- The results only apply to the device under test.
- This report is 26 pages, and no part of it may be abstracted or reproduced.



Test Engineer :		<i>Peter Perry</i>
Approval Signatory :	<i>2017.7.19 David Lee</i>	Laboratory Head :
		<i>Hsin Zai Chang</i>

## TESTING / INSPECTION REPORT

### TESTING EQUIPMENT :

- |                         |   |
|-------------------------|---|
| 1.Vibration Tester      | : KING DESIGN KD-9363EM-600F2K-50N120,<br>S/N : KDS11054986 |
| 2.Controller            | : VCS-913+, S/N : 1312384                                   |
| 3.Control Accelerometer | : Wilcoxon Research WR-777, S/N : 4207                      |
| 4.Shock Testing System  | : KING DESIGN DP-1200-60, S/N : R2110086489                 |
| 5.Controller            | : DAS-105, S/N : 263210255                                  |
| 6.Accelerometer         | : B&K 4398, S/N : 2209044                                   |
| 7.Shock Testing System  | : KING DESIGN DP-1200-18, S/N : KDS02197998                 |
| 8.Controller            | : DAS-105, S/N : 263210255                                  |
| 9.Accelerometer         | : DYTRAN Model : 3200B6 S/N : 8594                          |

### TEST ENVIRONMENT :

- |                   |                      |
|-------------------|----------------------|
| Temperature       | : 25°C (25±10°C)     |
| Relative Humidity | : 65% RH (50±25% RH) |

### SPECIMEN :

- |          |                 |
|----------|-----------------|
| Model    | : SM(U/S)130-25 |
| Quantity | : 1 unit        |

## TESTING / INSPECTION REPORT

### TEST SPECIFICATION(1) :

#### **Comply with MIL-STD 810G 514.6 category 7**

Random Vibration test (Non-Operating)

Frequency : 15 Hz to 2,000 Hz

Accelerate : 4.02 g rms

P.S.D. : 0.01 g<sup>2</sup>/Hz (15Hz)

0.01 g<sup>2</sup>/Hz (105.94Hz)

+6 dB/Oct (105.94Hz to 150Hz)

0.02 g<sup>2</sup>/Hz (150Hz)

0.02 g<sup>2</sup>/Hz (500Hz)

-6 dB/Oct (500Hz to 2,000Hz)

0.0013 g<sup>2</sup>/Hz (2,000Hz)

Test Axis : X, Y, Z axis

Test Time : 1 hr (Each axis)

Total Test Time : 3 hrs

### TEST SPECIFICATION(2) :

#### **Comply with MIL-STD 810G 514.6 category 24**

Random Vibration test (Operating)

Frequency : 20 Hz to 2,000 Hz

Accelerate : 7.69 g rms

P.S.D. : 0.04 g<sup>2</sup>/Hz (20Hz to 1,000Hz)

: -6 dB/Oct (1,000Hz to 2,000Hz)

Test Axis : X, Y, Z axis

Test Time : 1 hr (Each axis)

Total Test Time : 3 hrs

## TESTING / INSPECTION REPORT

### TEST SPECIFICATION(3) :

#### **Comply with MIL-STD-883K Method 2002.5**

Wave Form : Half sine wave (Non-Operating)  
 Acceleration : 1,500 g  
 Duration Time : 0.5 mS  
 No. of Shock : Each axis 3 times  
 Shock Direction :  $\pm X$ ,  $\pm Y$ ,  $\pm Z$  axis

### TEST SPECIFICATION(4) :


#### **Comply with MIL-STD-202G, Method 213B**

Wave Form : Half sine wave (Operating)  
 Acceleration : 50 g  
 Duration Time : 11 mS  
 No. of Shock : Each axis 3 times  
 Shock Direction :  $\pm X$ ,  $\pm Y$ ,  $\pm Z$  axis






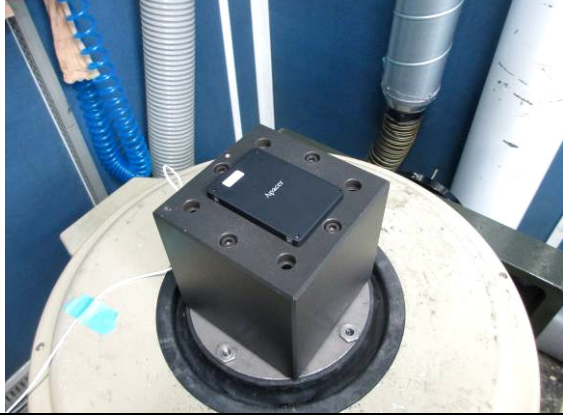
### TEST RESULT :

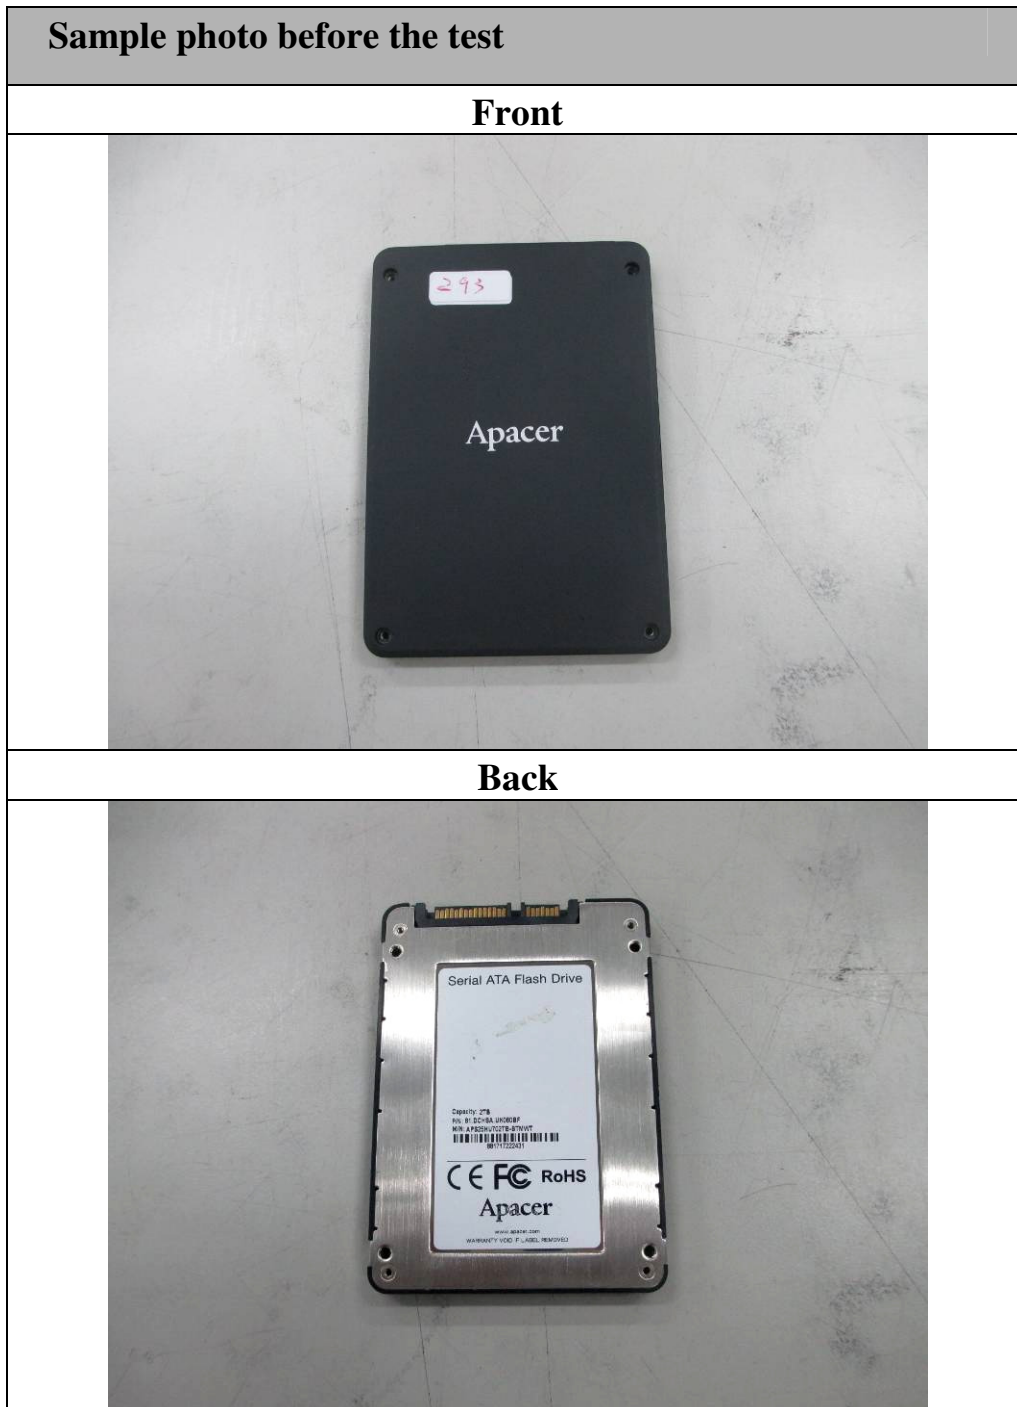Describe	PASS	FAIL	Non-Judgment
Function judgment <sup>(1)</sup>	√	---	---
Appearance check <sup>(2)</sup>	√	---	---
(1)--Burn in function was normal after the test.			
(2)--No visible damages were found after the test.			


## TESTING / INSPECTION REPORT




## TESTING / INSPECTION REPORT

Vibration testing photos	
<b>X axis (Operating)</b>	<b>X axis (Non-Operating)</b>
	
<b>Y axis (Operating)</b>	<b>Y axis (Non-Operating)</b>
	
<b>Z axis (Operating)</b>	<b>Z axis (Non-Operating)</b>
	


## TESTING / INSPECTION REPORT

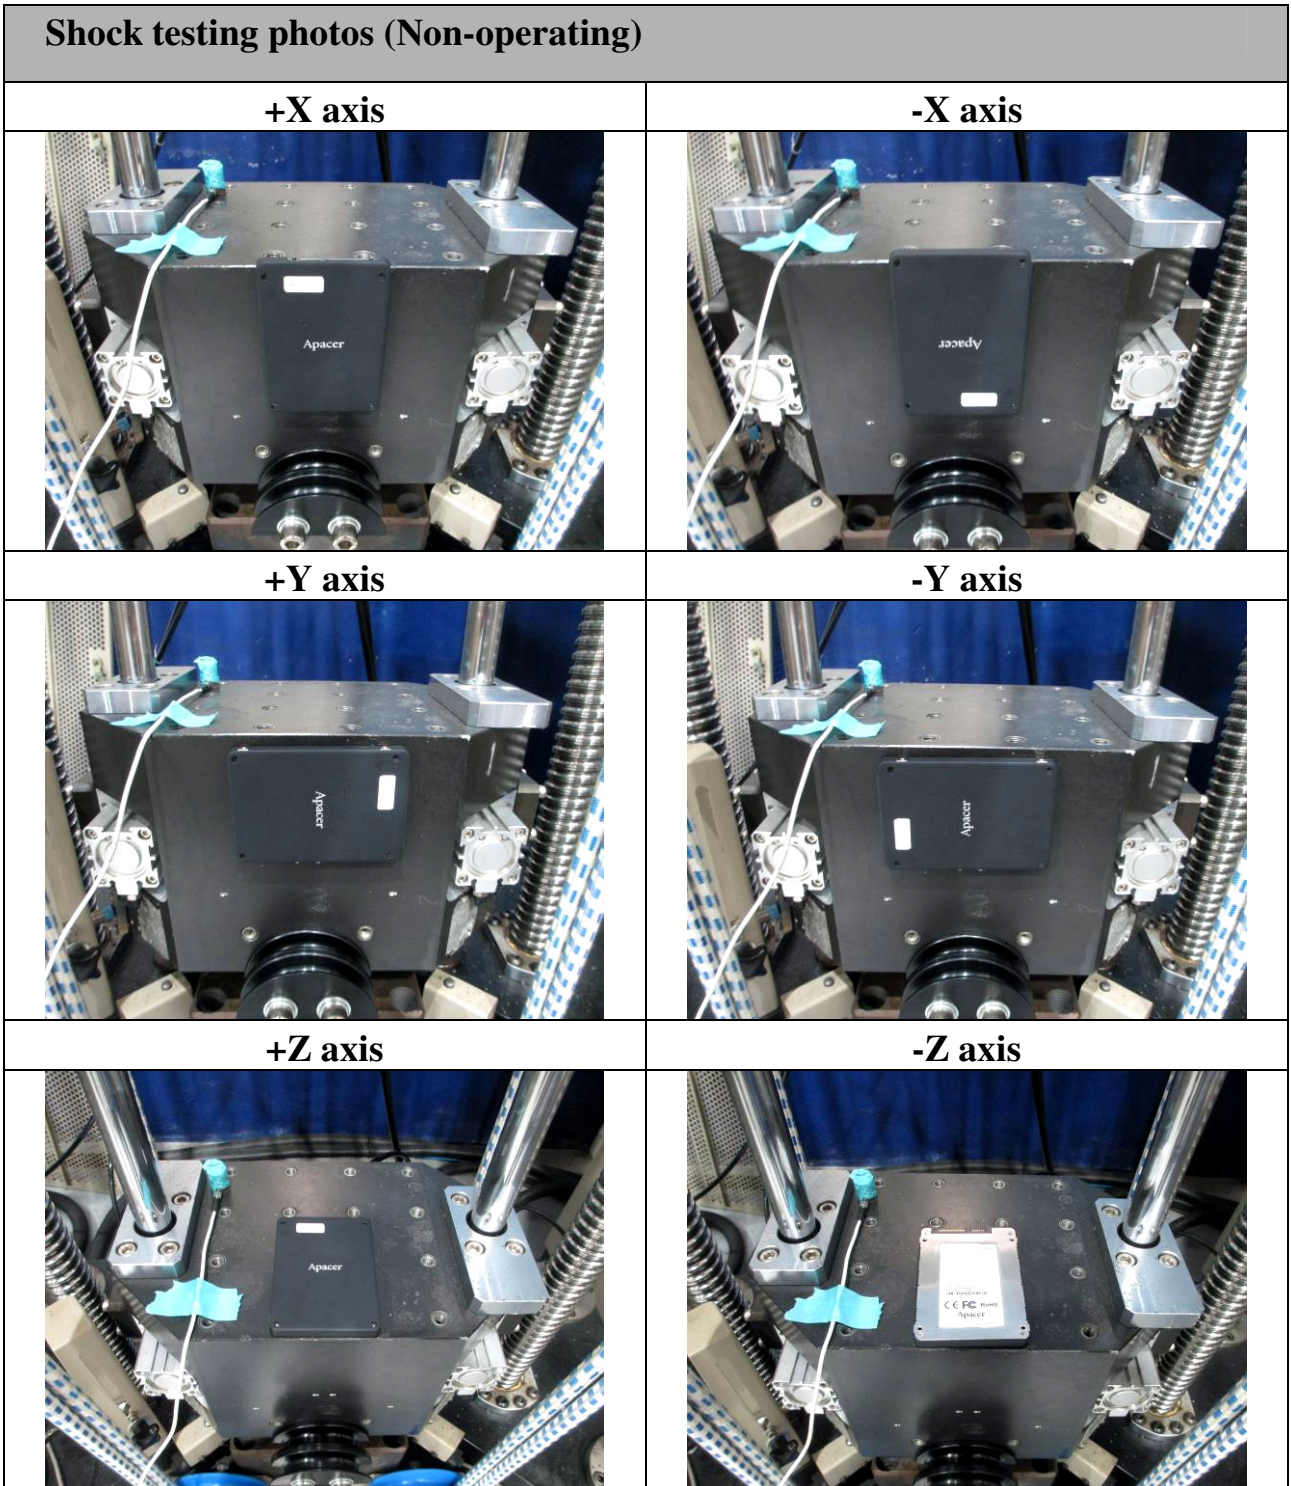

## TESTING / INSPECTION REPORT

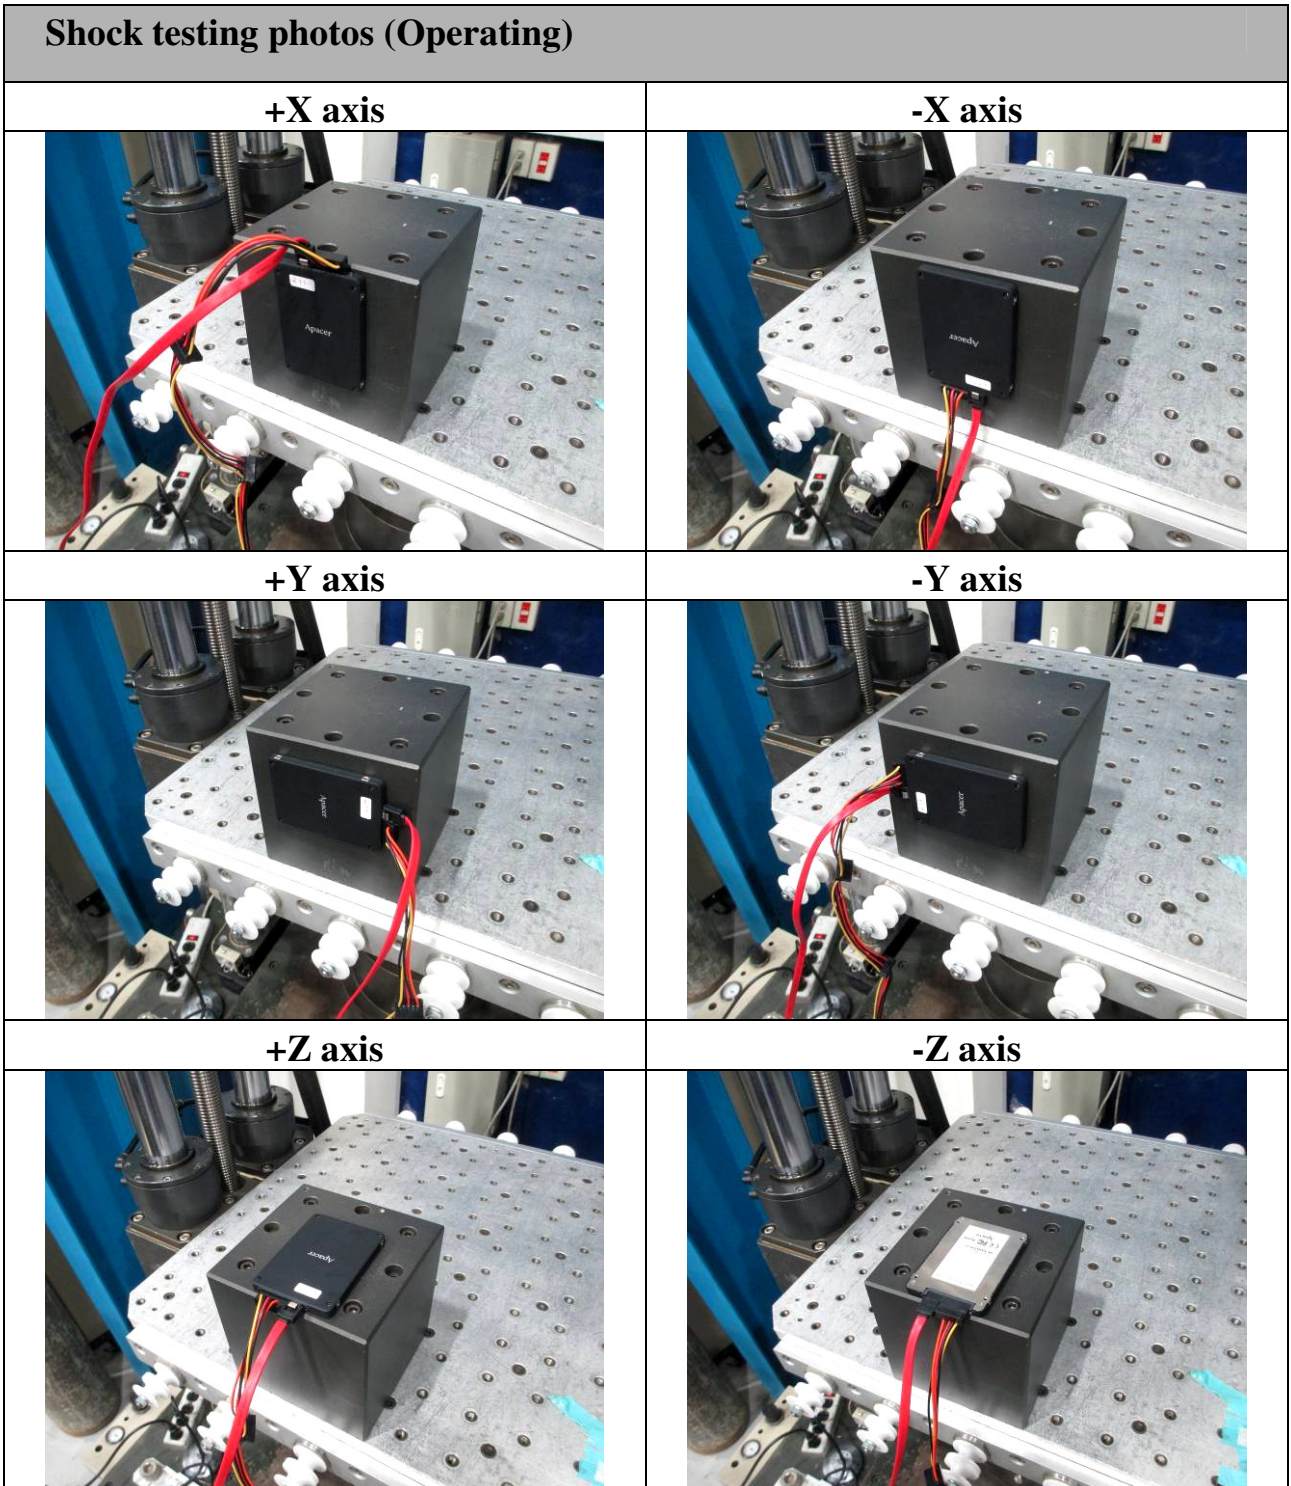

X axis

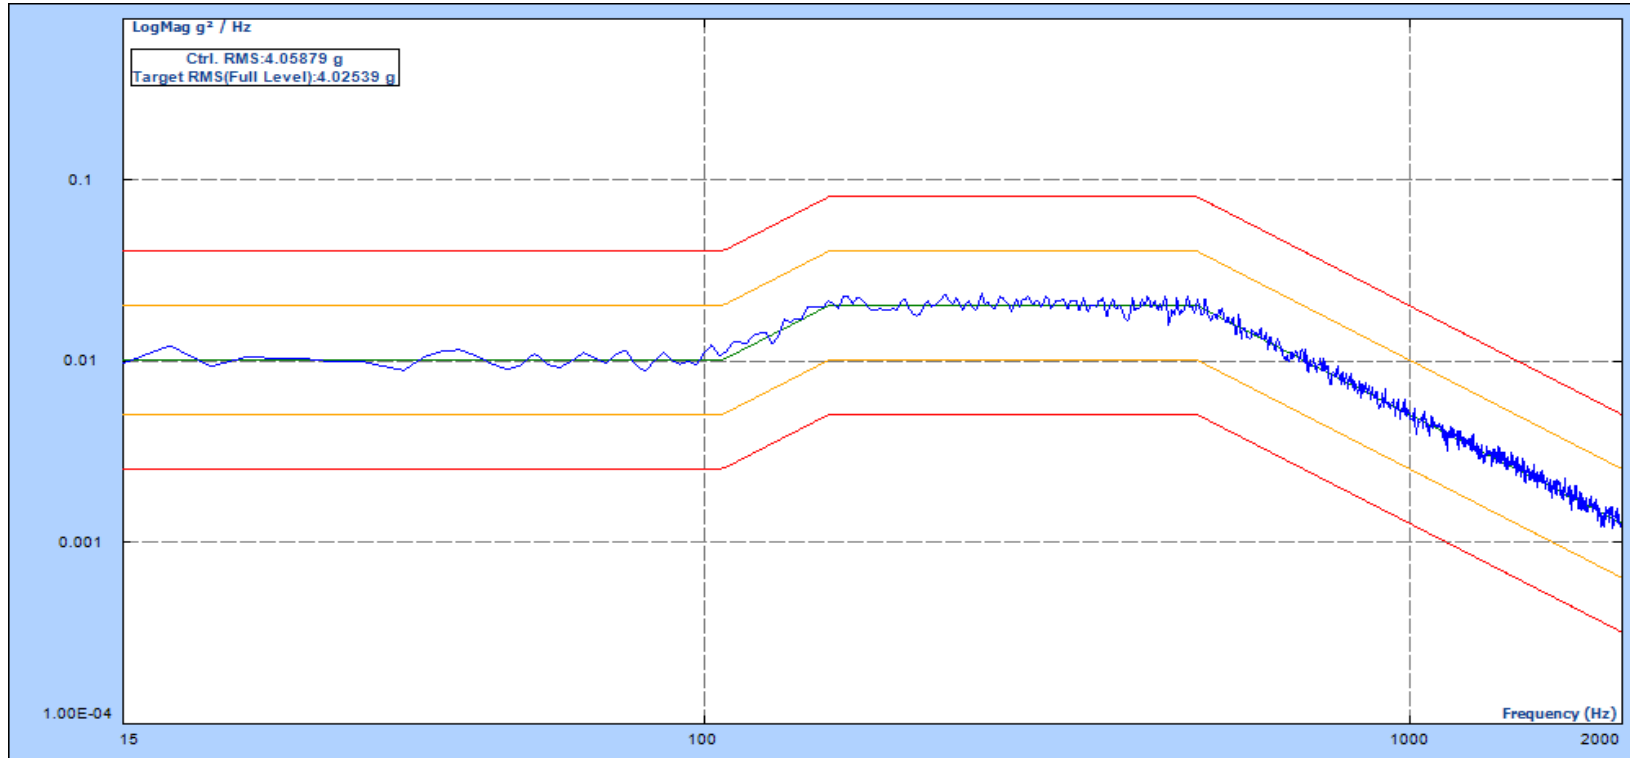


Level: 100.00 %  
 Velocity Pk: 0.133 m/s  
 Remaining: 00:00:00

Drive Pk: 0.448V  
 Control RMS: 4.059 g  
 Total Elapsed: 01:01:00

Est. Disp. : 1.710 mm Pk-Pk  
 Target RMS: 4.020 g  
 Full Level Elapsed: 01:00:00

Y axis

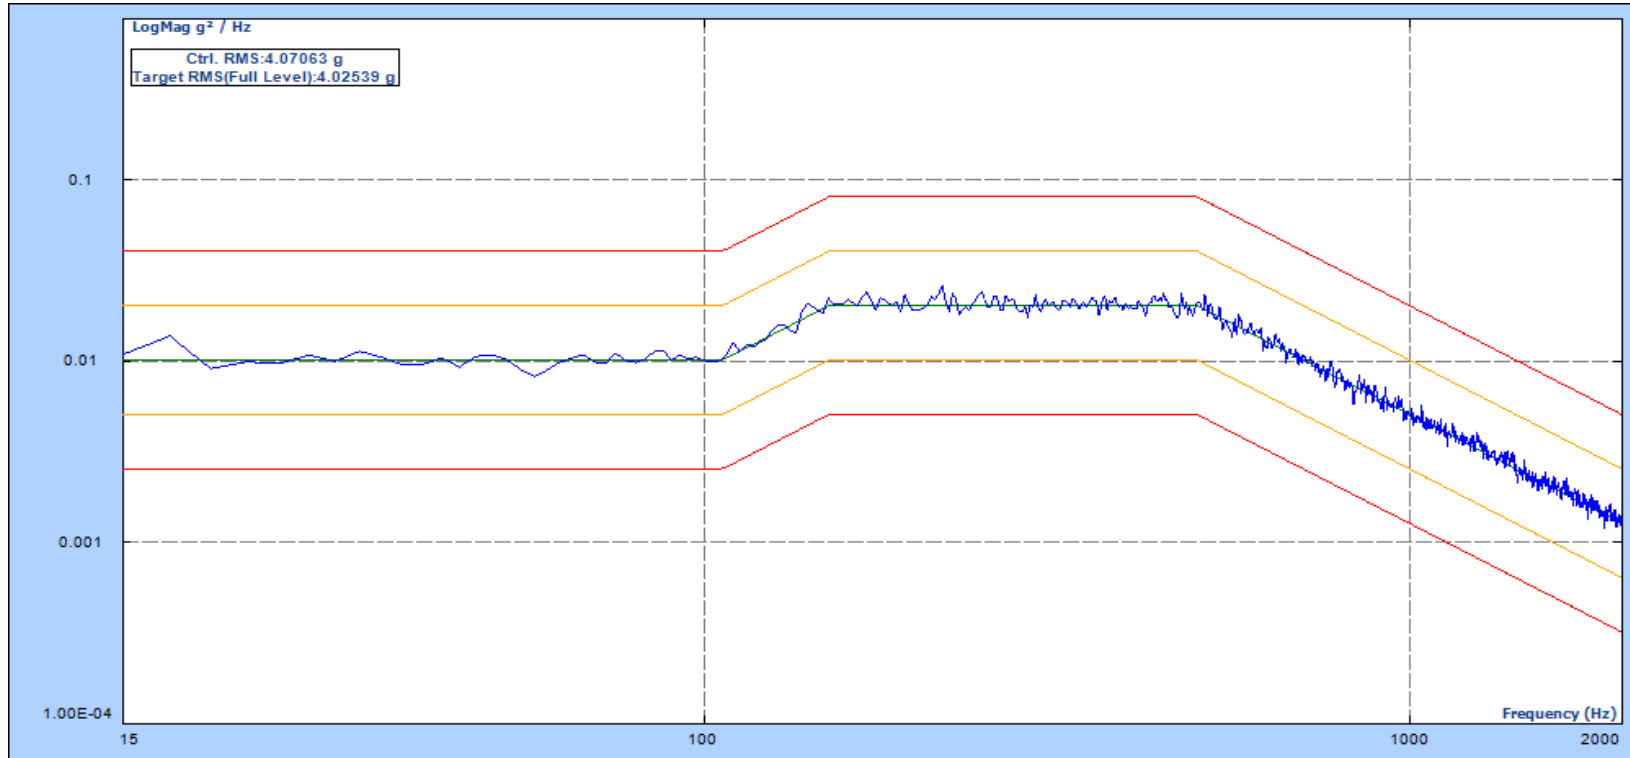


Level: 100.00 %  
 Velocity Pk: 0.134 m/s  
 Remaining: 00:00:00

Drive Pk: 0.505V  
 Control RMS: 4.071 g  
 Total Elapsed: 01:01:01

Est. Disp. : 1.764 mm Pk-Pk  
 Target RMS: 4.020 g  
 Full Level Elapsed: 01:00:00

Z axis

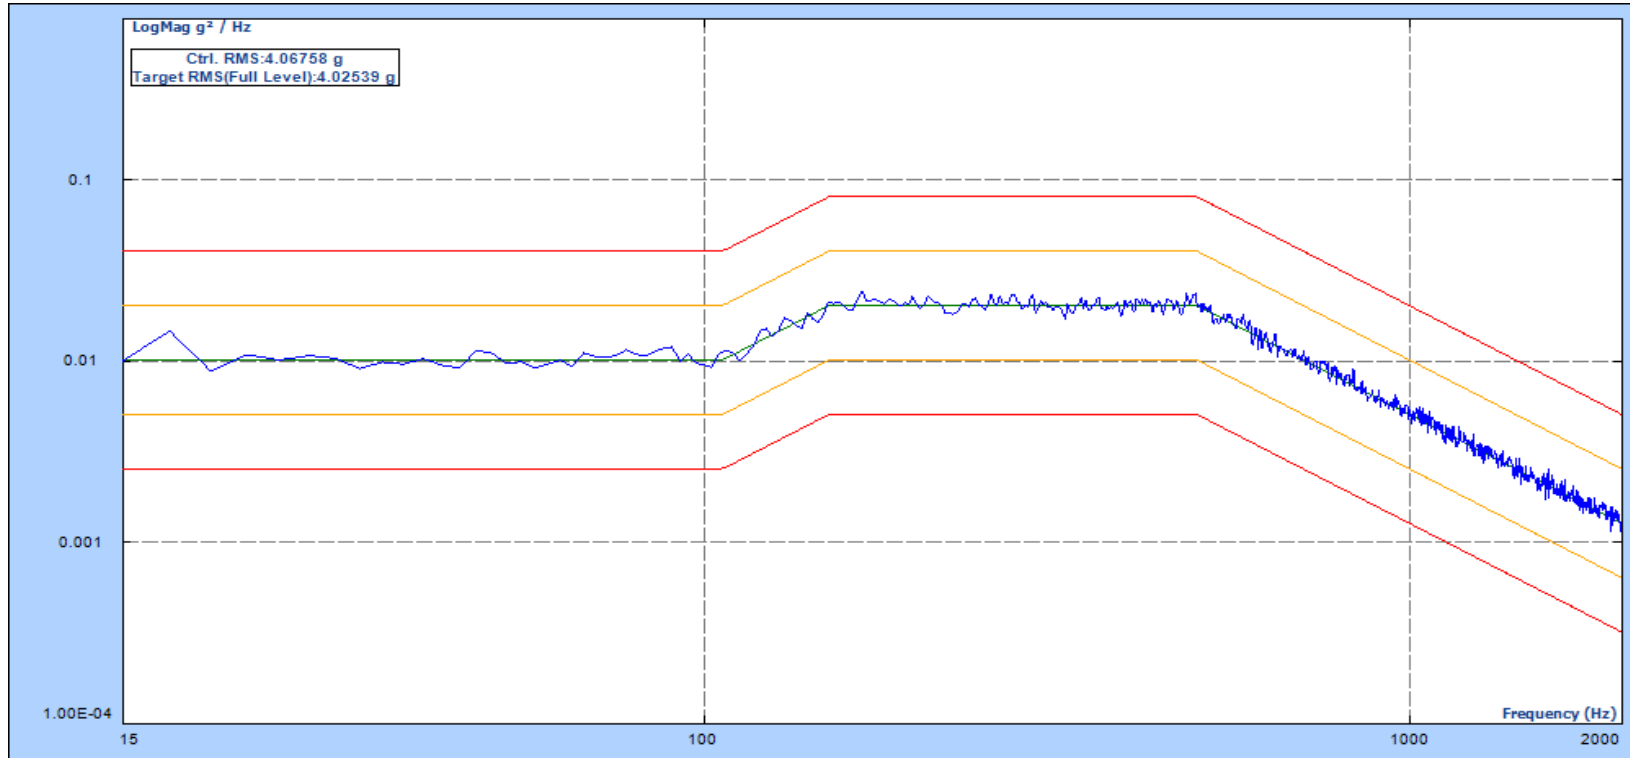


Level: 100.00 %  
Velocity Pk: 0.135 m/s  
Remaining: 00:00:00

Drive Pk: 0.440V  
Control RMS: 4.066 g  
Total Elapsed: 01:01:01

Est. Disp. : 1.760 mm Pk-Pk  
Target RMS: 4.020 g  
Full Level Elapsed: 00:30:00

X axis

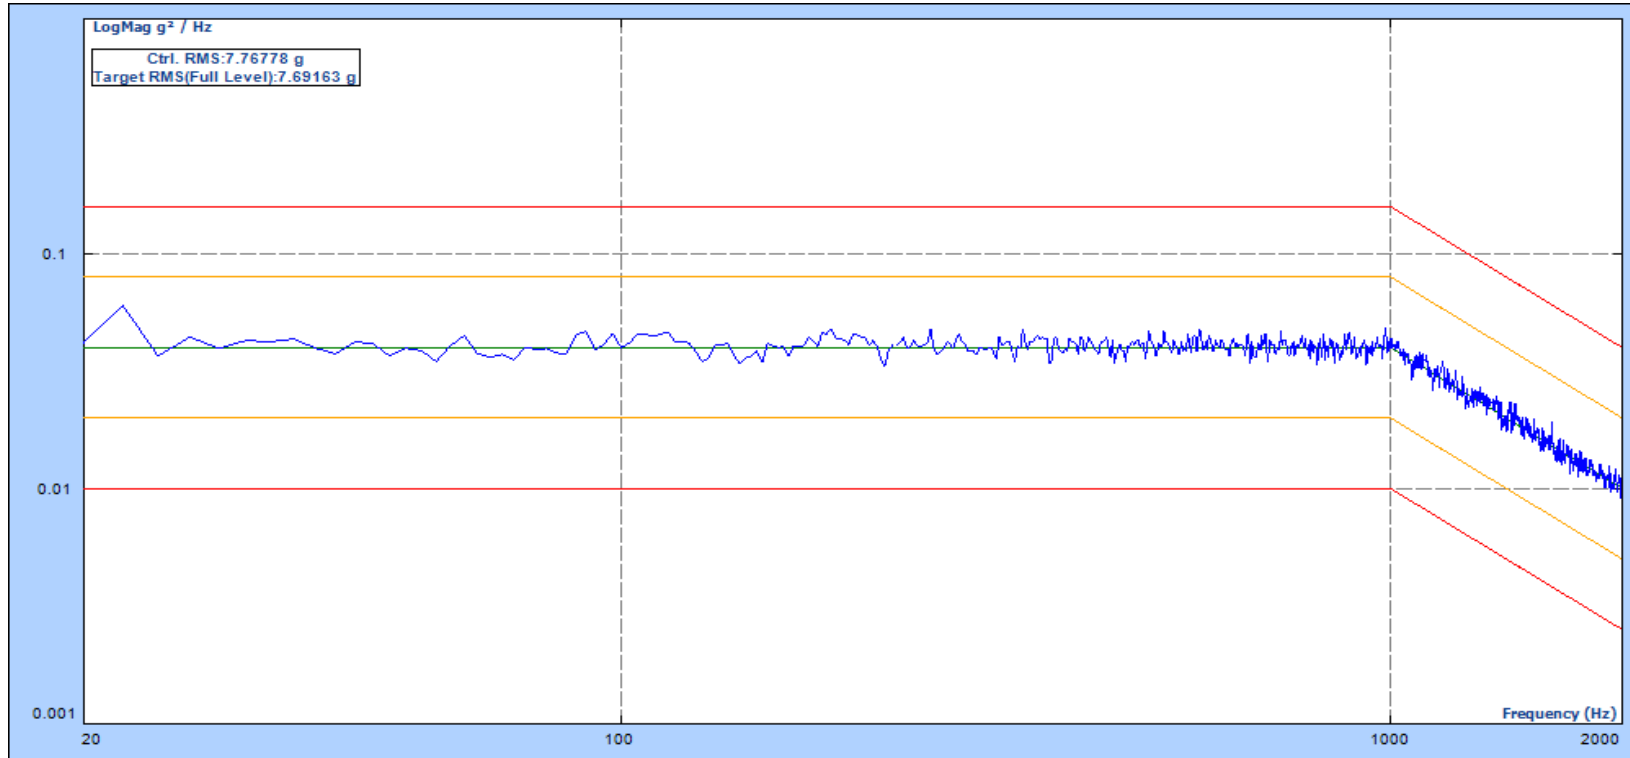


Level: 100.00 %  
Velocity Pk: 0.222 m/s  
Remaining: 00:00:00

Drive Pk: 0.810V  
Control RMS: 7.698 g  
Total Elapsed: 01:01:03

Est. Disp. : 2.239 mm Pk-Pk  
Target RMS: 7.690 g  
Full Level Elapsed: 01:00:00

Y axis

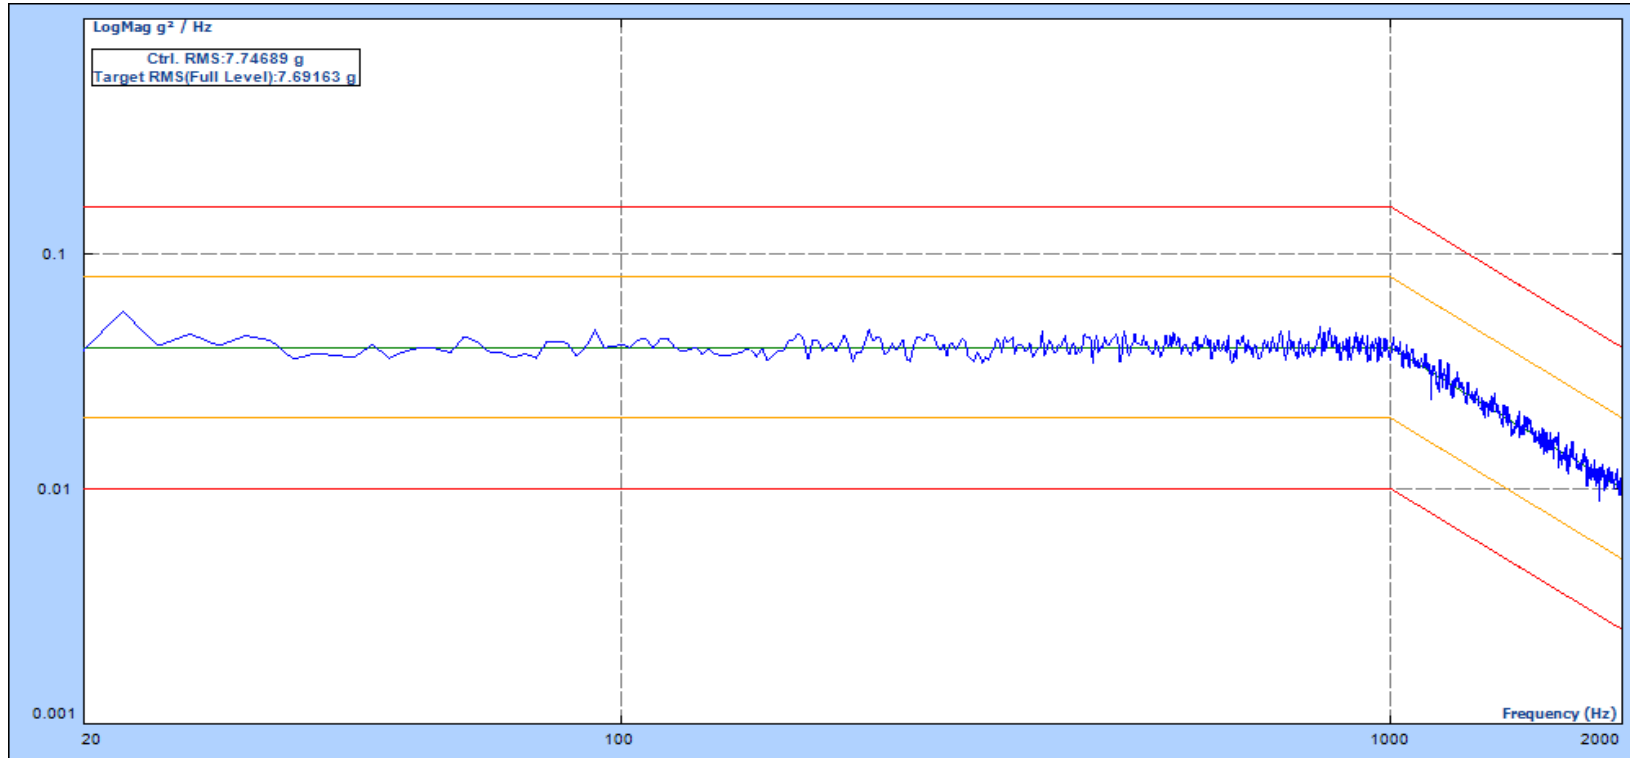


Level: 100.00 %  
Velocity Pk: 0.221 m/s  
Remaining: 00:00:00

Drive Pk: 0.806V  
Control RMS: 7.747 g  
Total Elapsed: 01:01:03

Est. Disp. : 2.217 mm Pk-Pk  
Target RMS: 7.690 g  
Full Level Elapsed: 01:00:00

Z axis

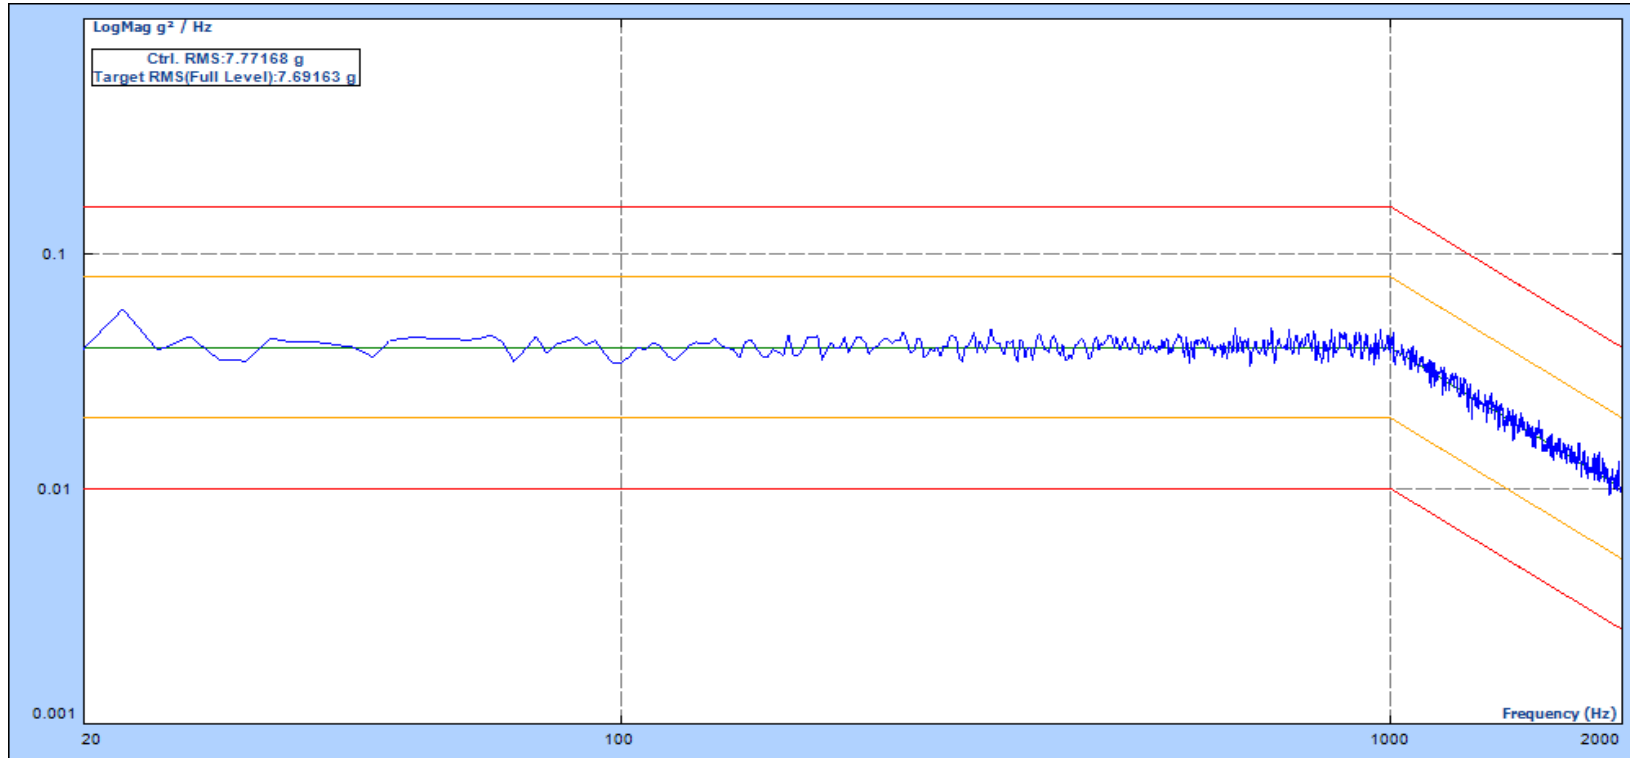


Level: 100.00 %  
Velocity Pk: 0.221 m/s  
Remaining: 00:00:00

Drive Pk: 0.784V  
Control RMS: 7.772 g  
Total Elapsed: 01:01:03

Est. Disp. : 2.204 mm Pk-Pk  
Target RMS: 7.690 g  
Full Level Elapsed: 01:00:00


+X axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1514.82	0.55	194.85	2000.00	1514.82	-255.40

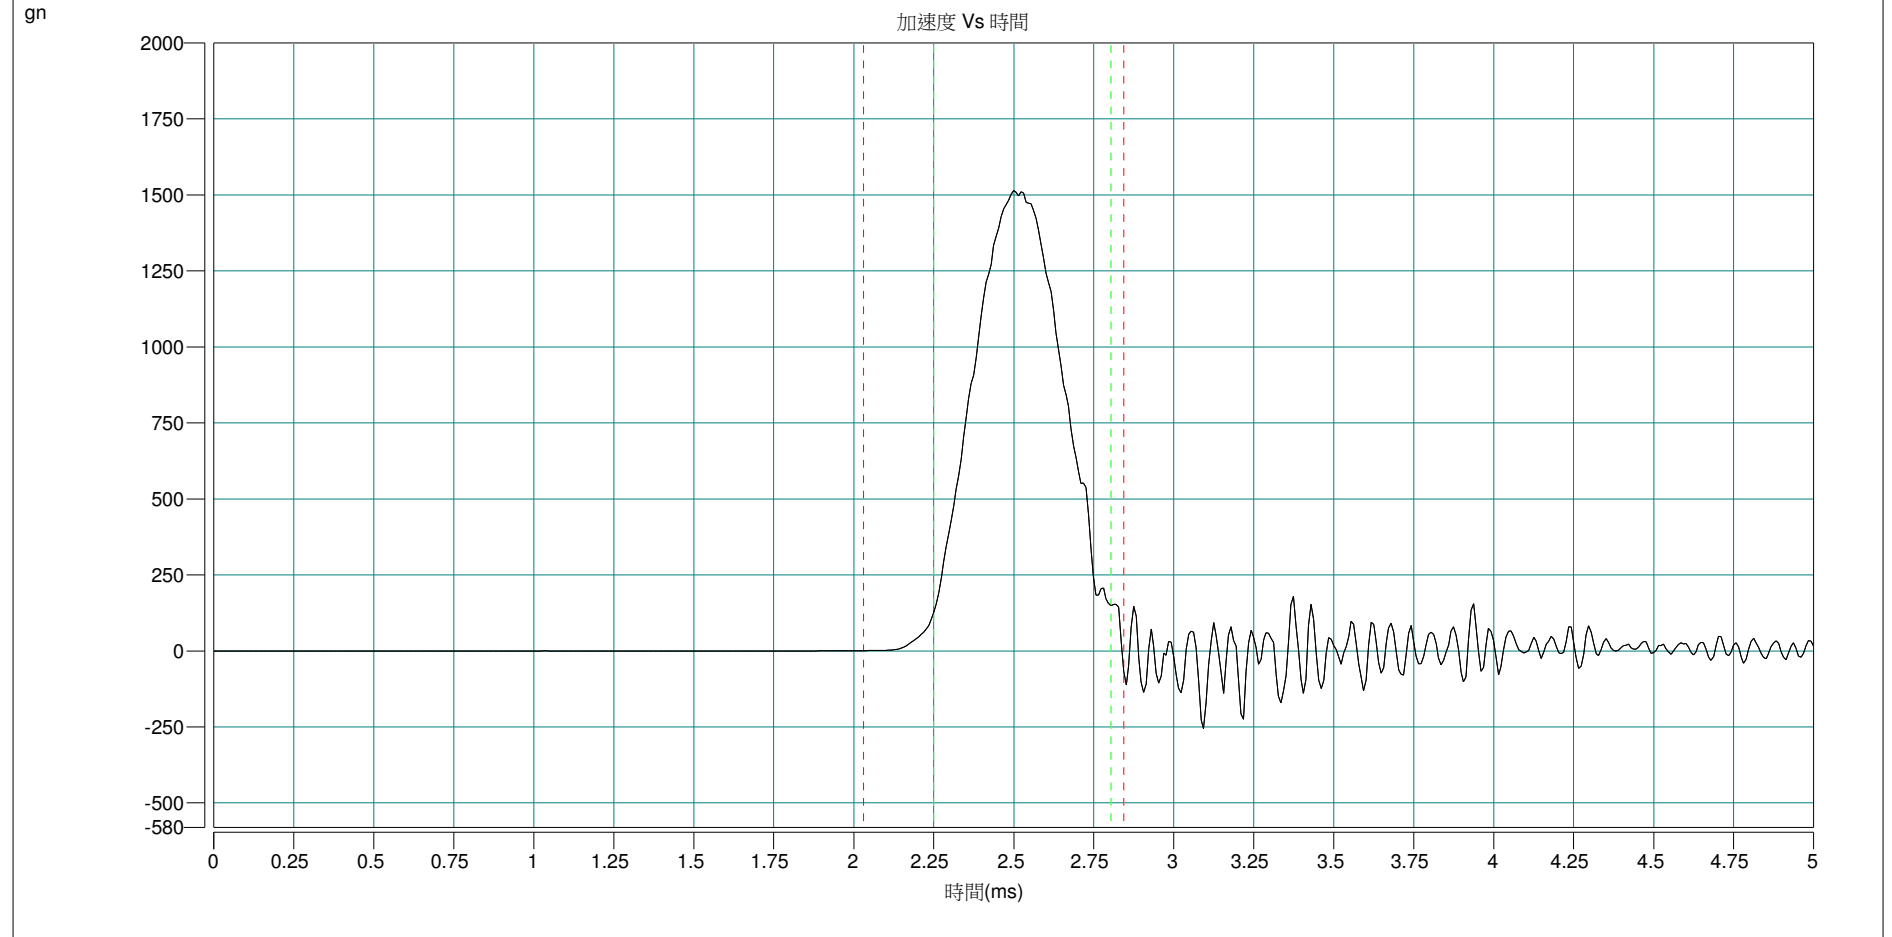


-X axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1525.46	0.56	195.97	2000.00	1525.46	-232.91

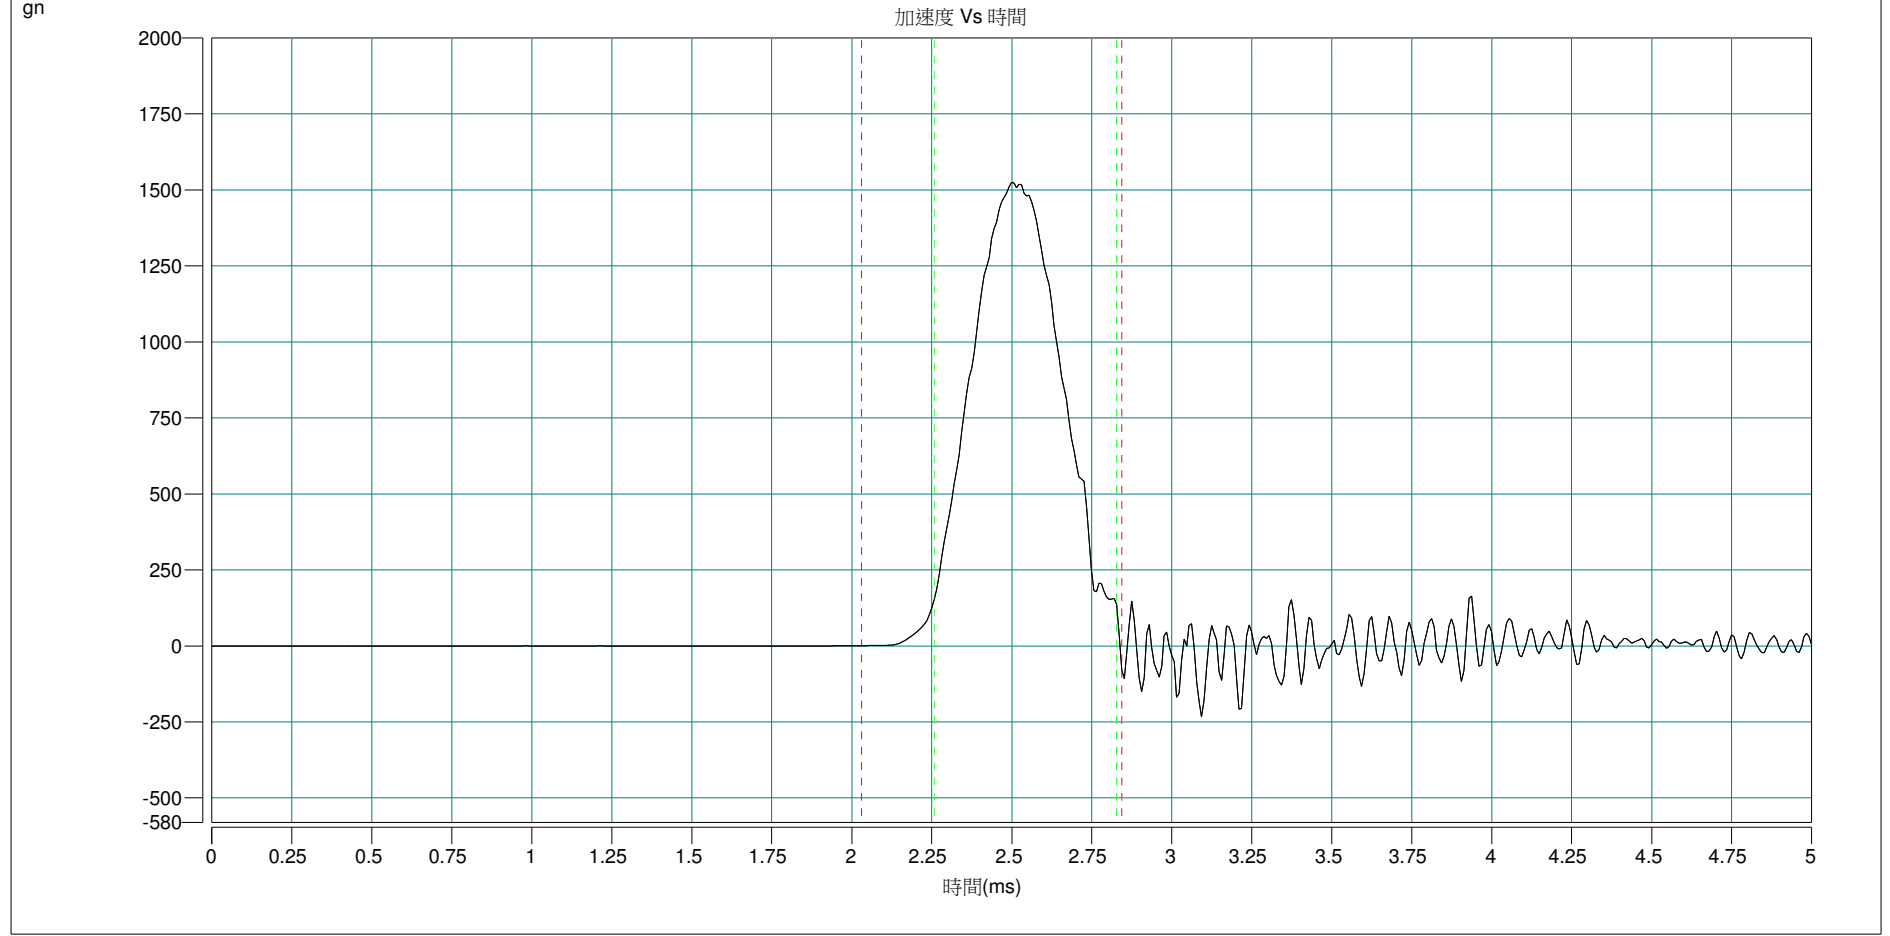


+Y axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1516.31	0.56	195.23	2000.00	1516.31	-220.79

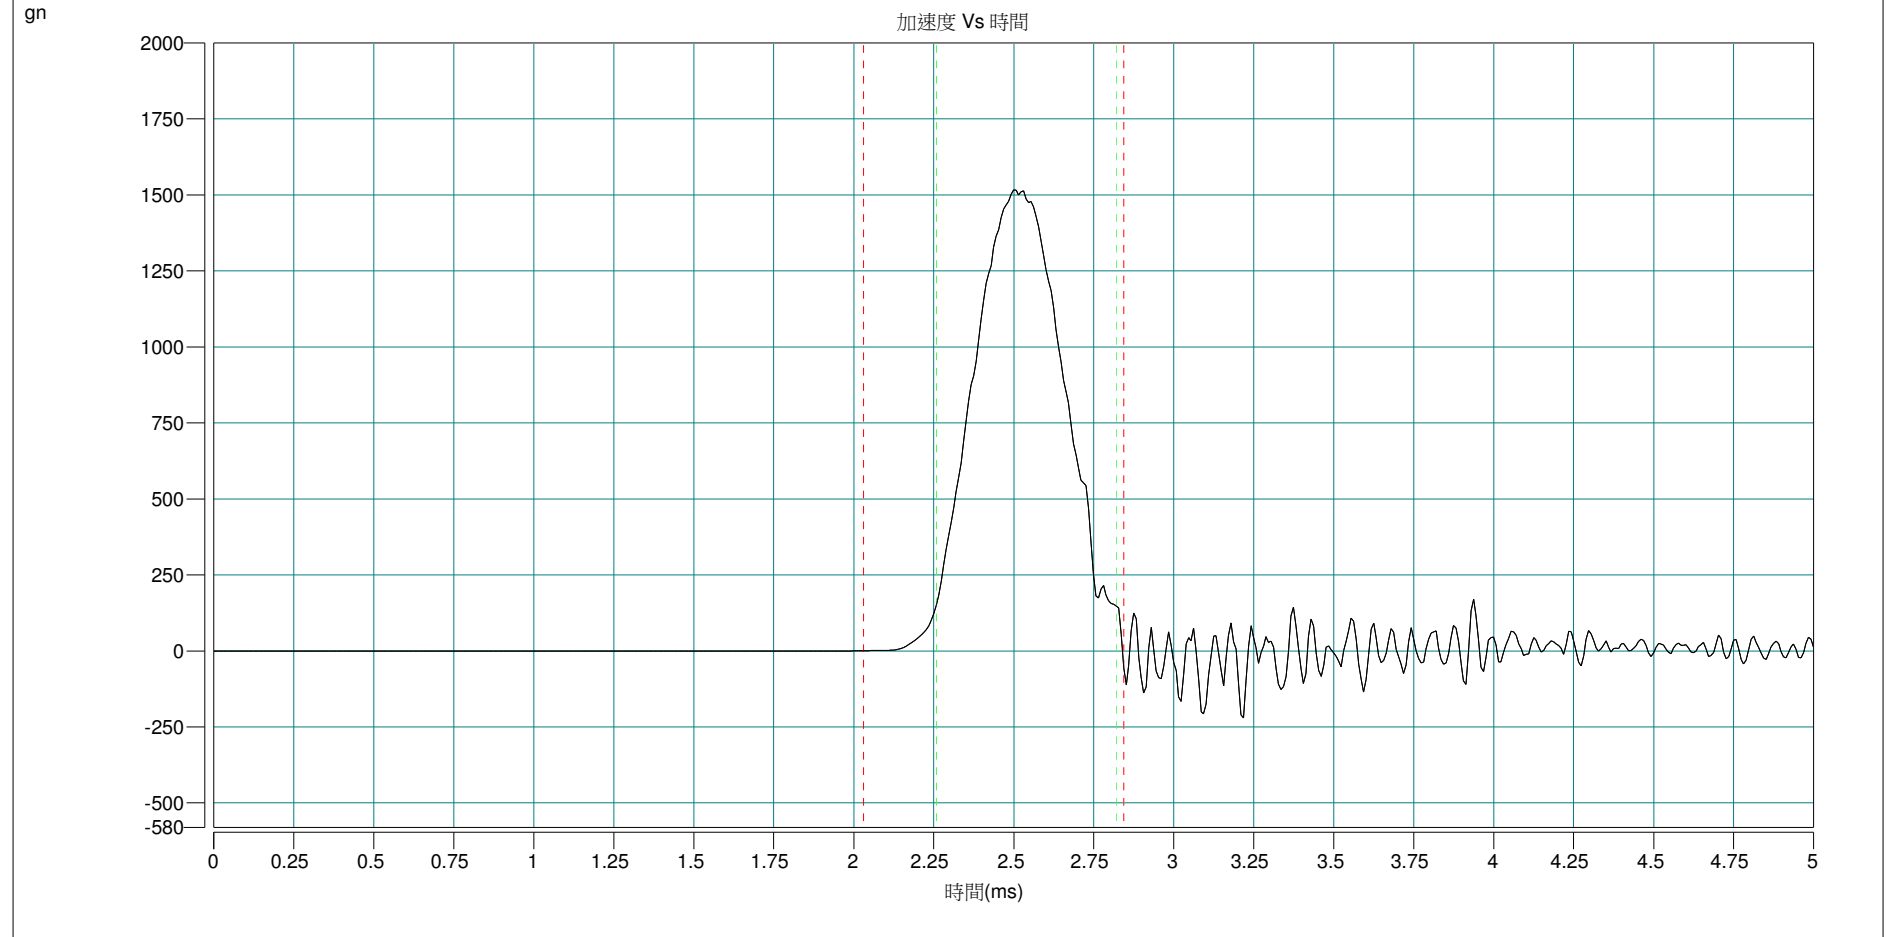


-Y axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1518.89	0.54	195.15	2000.00	1518.89	-218.52

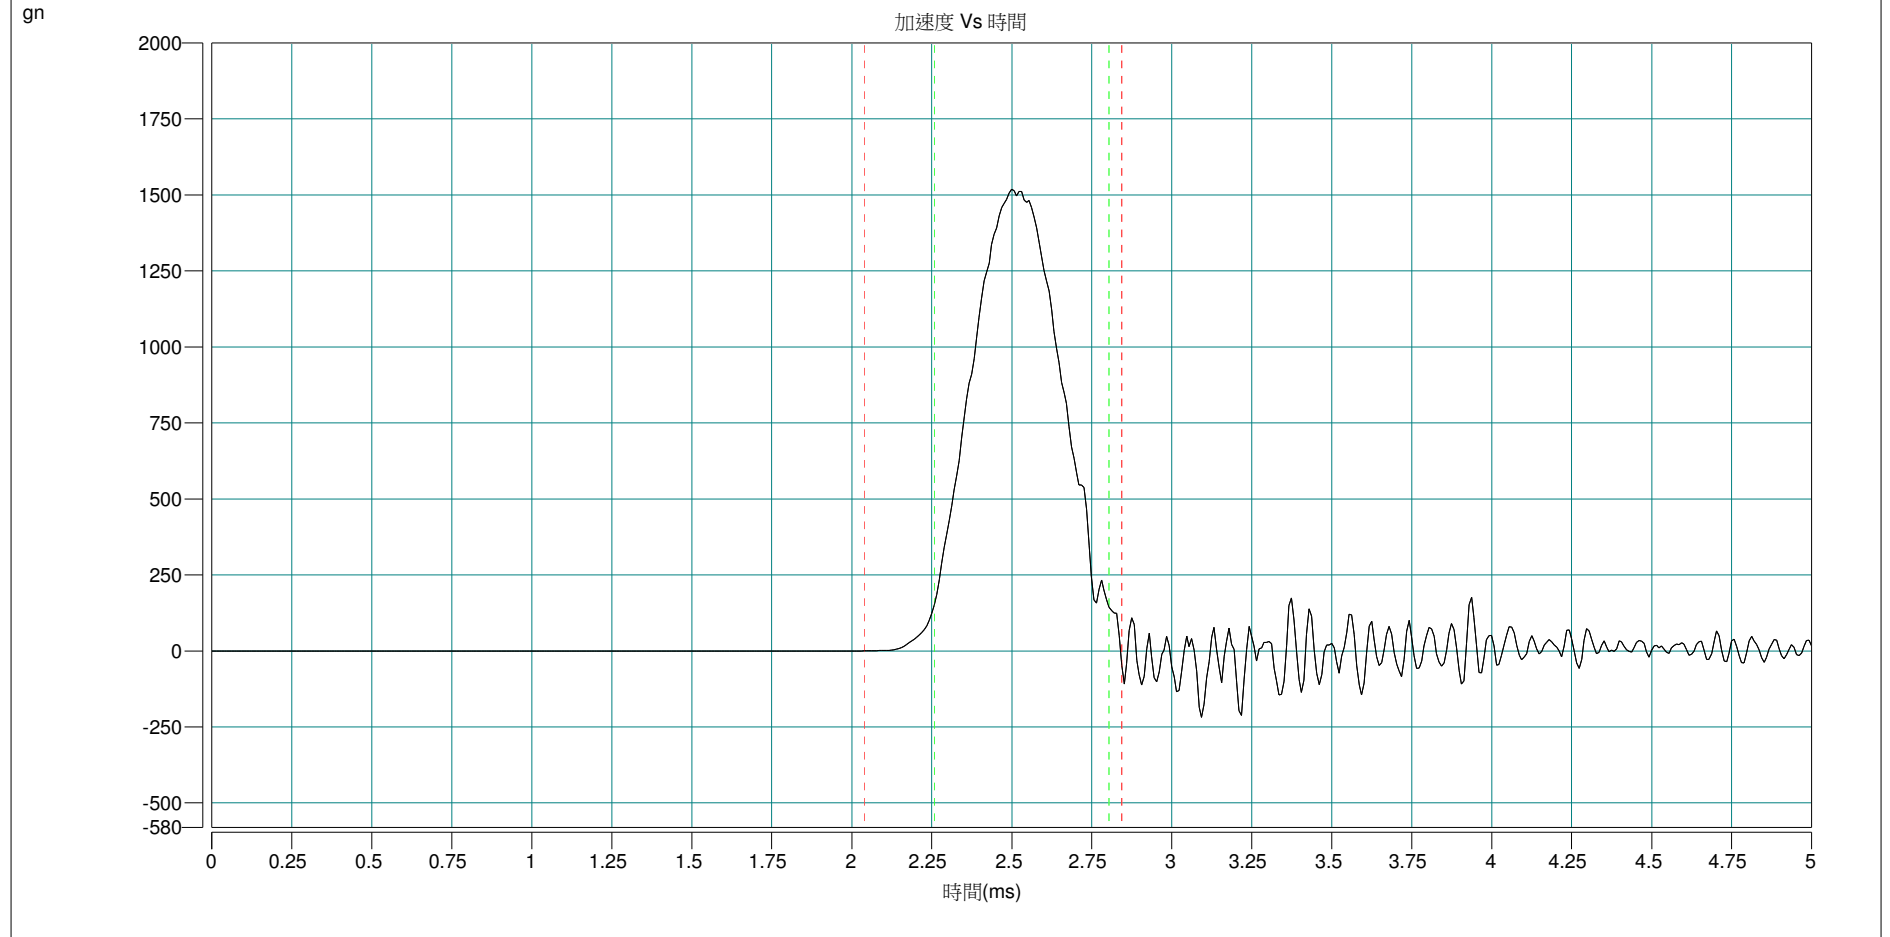


+Z axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1544.73	0.54	197.45	2000.00	1544.73	-217.85

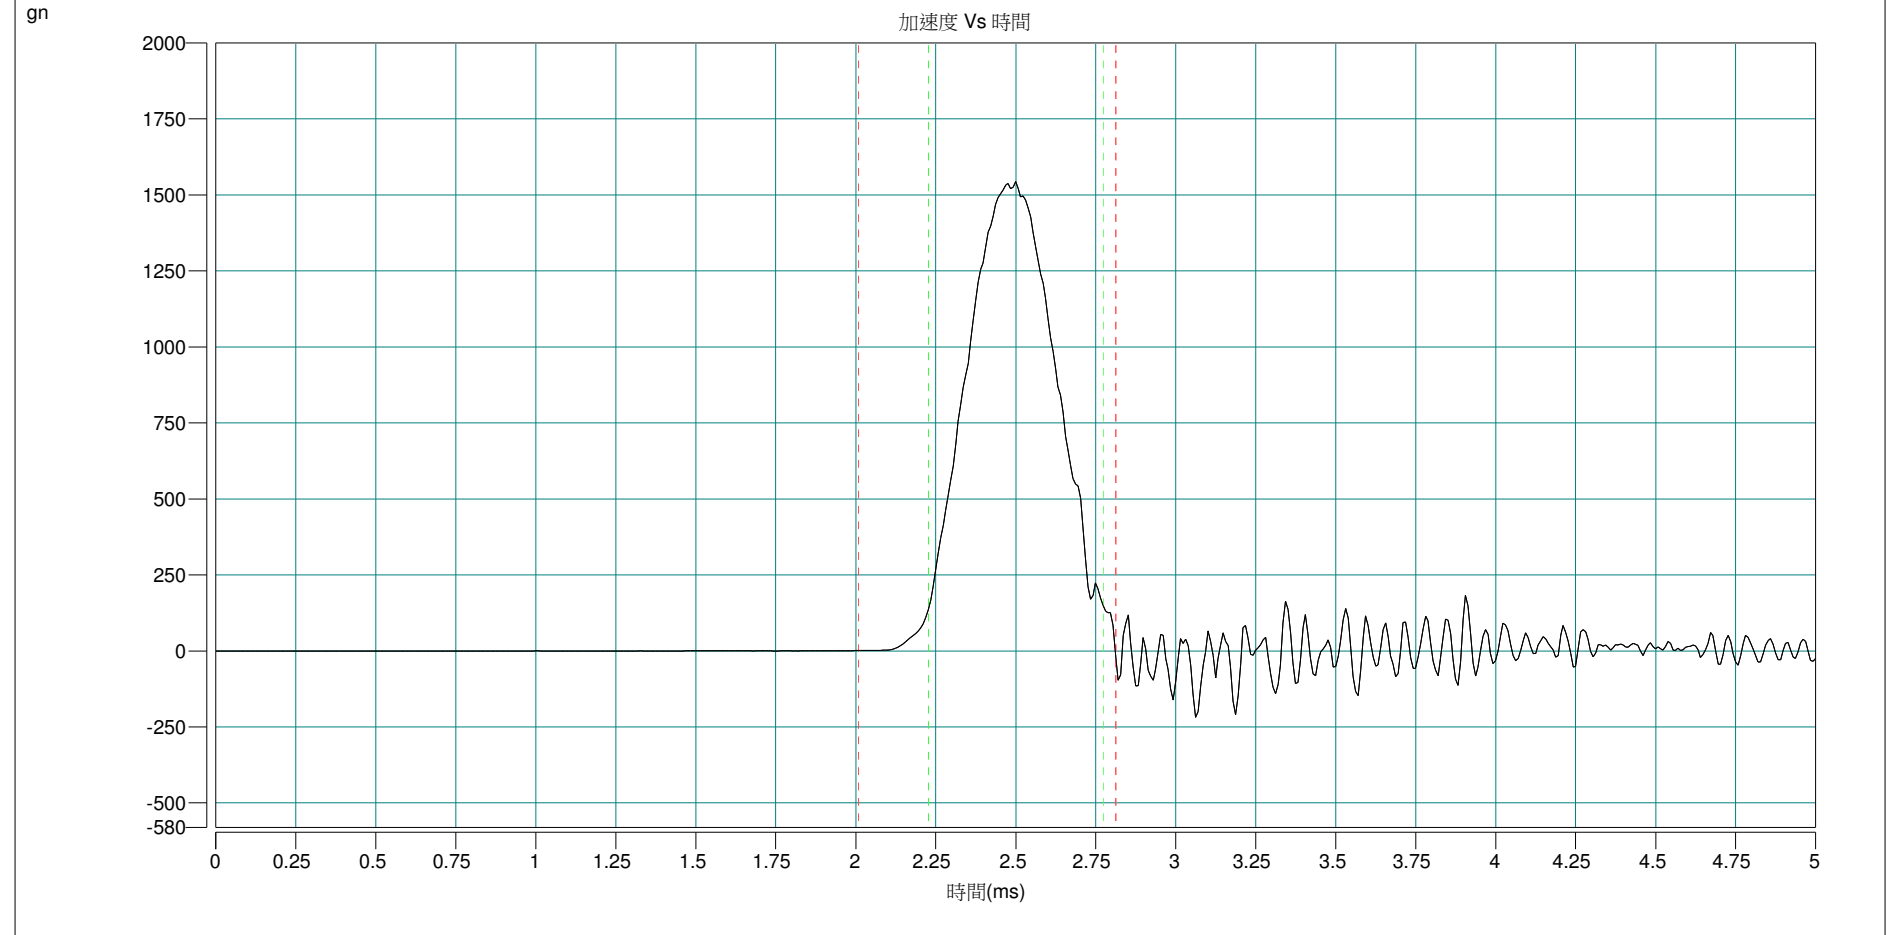


-Z axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1525.25	0.50	194.80	2000.00	1525.25	-198.33

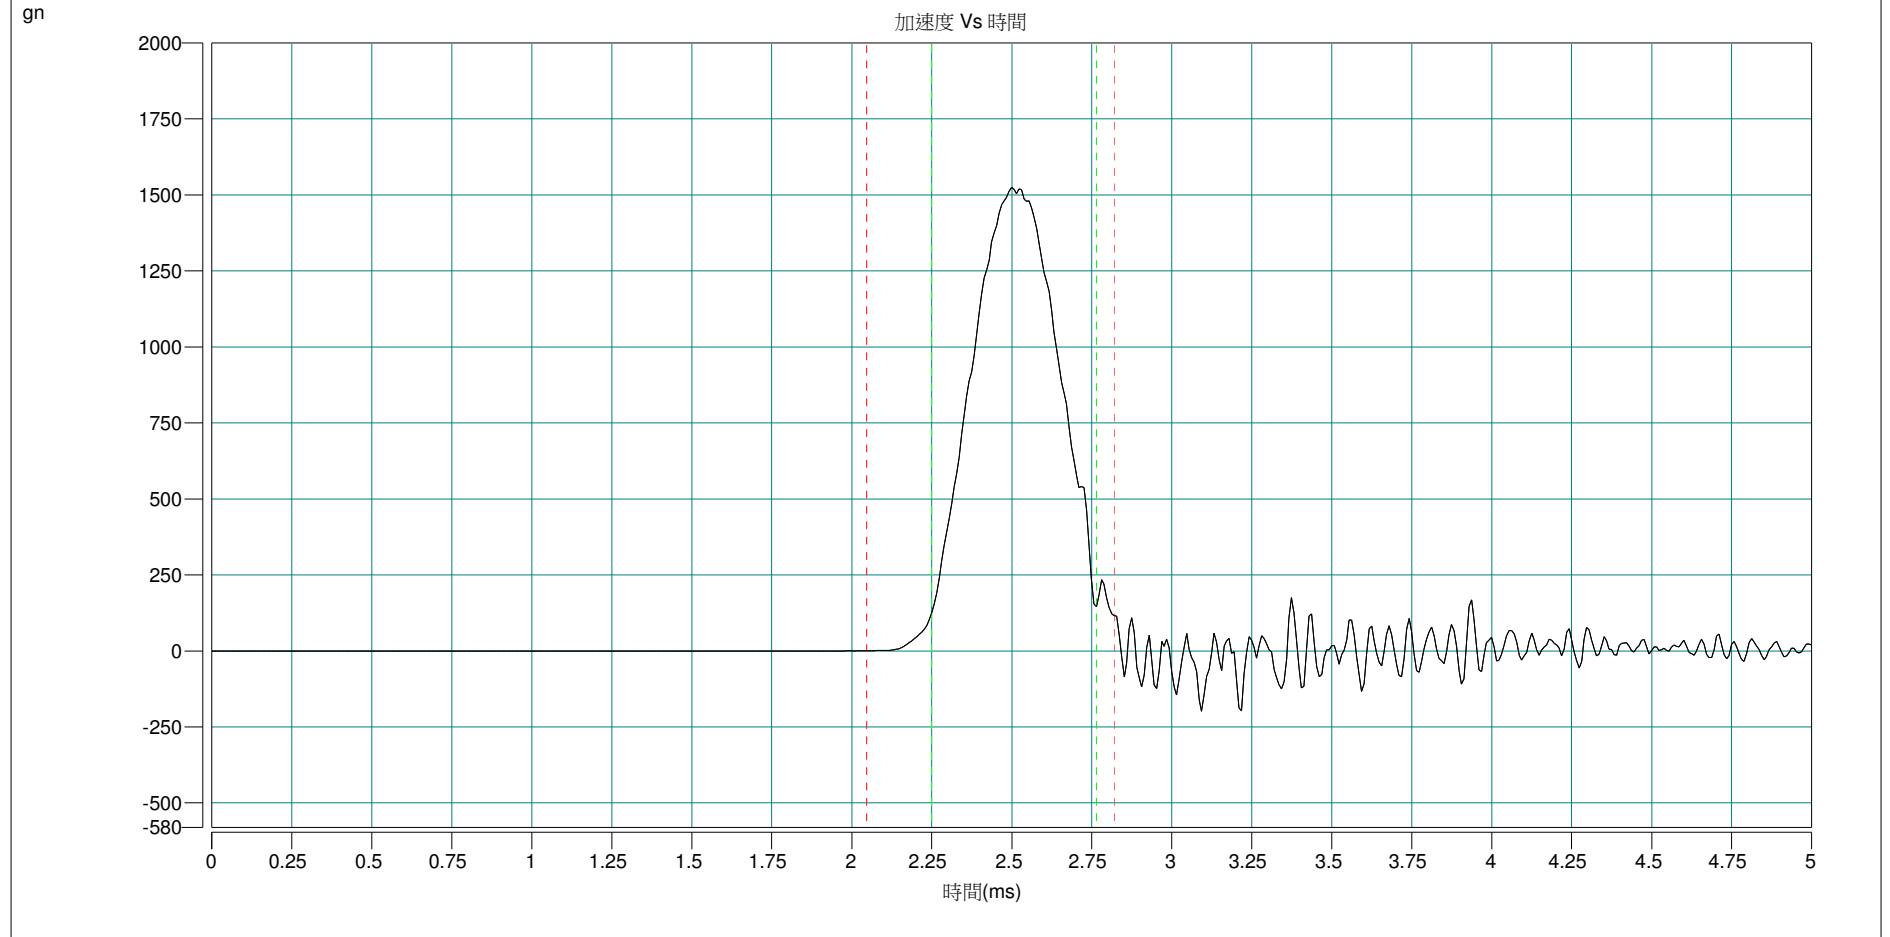


+X axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.16	11.13	139.13	500.00	51.16	-0.92

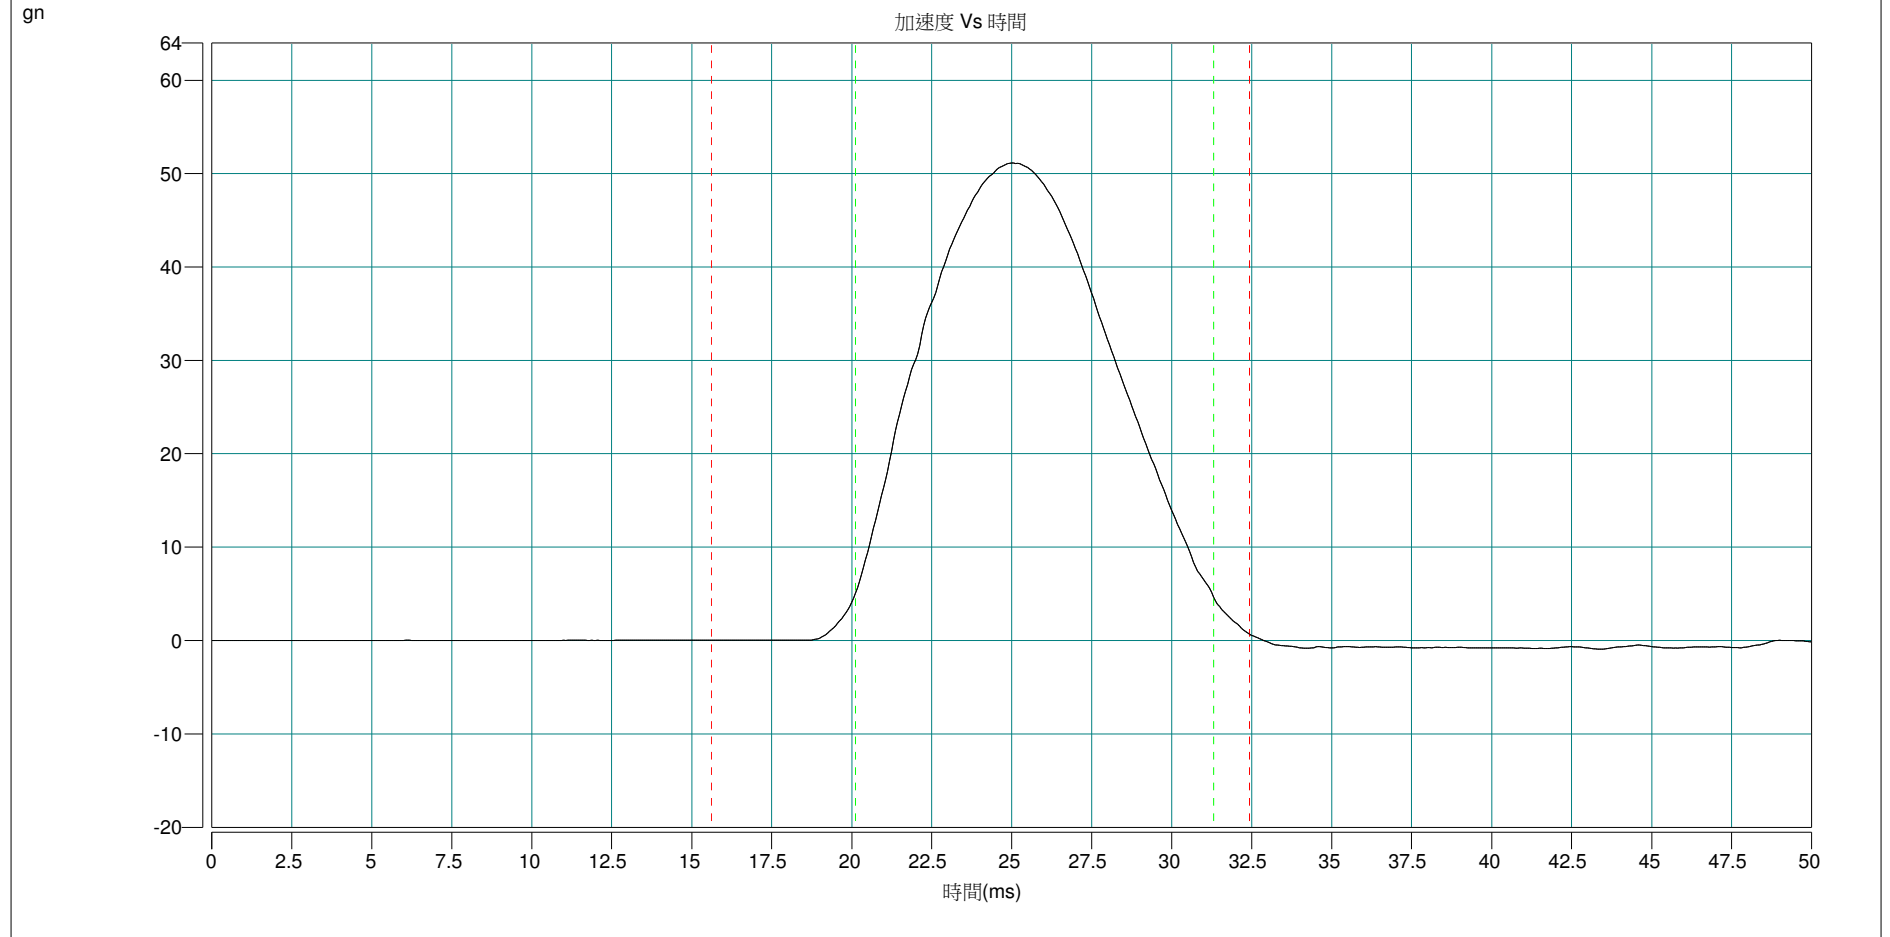


-X axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.23	11.38	141.51	500.00	51.23	-1.42

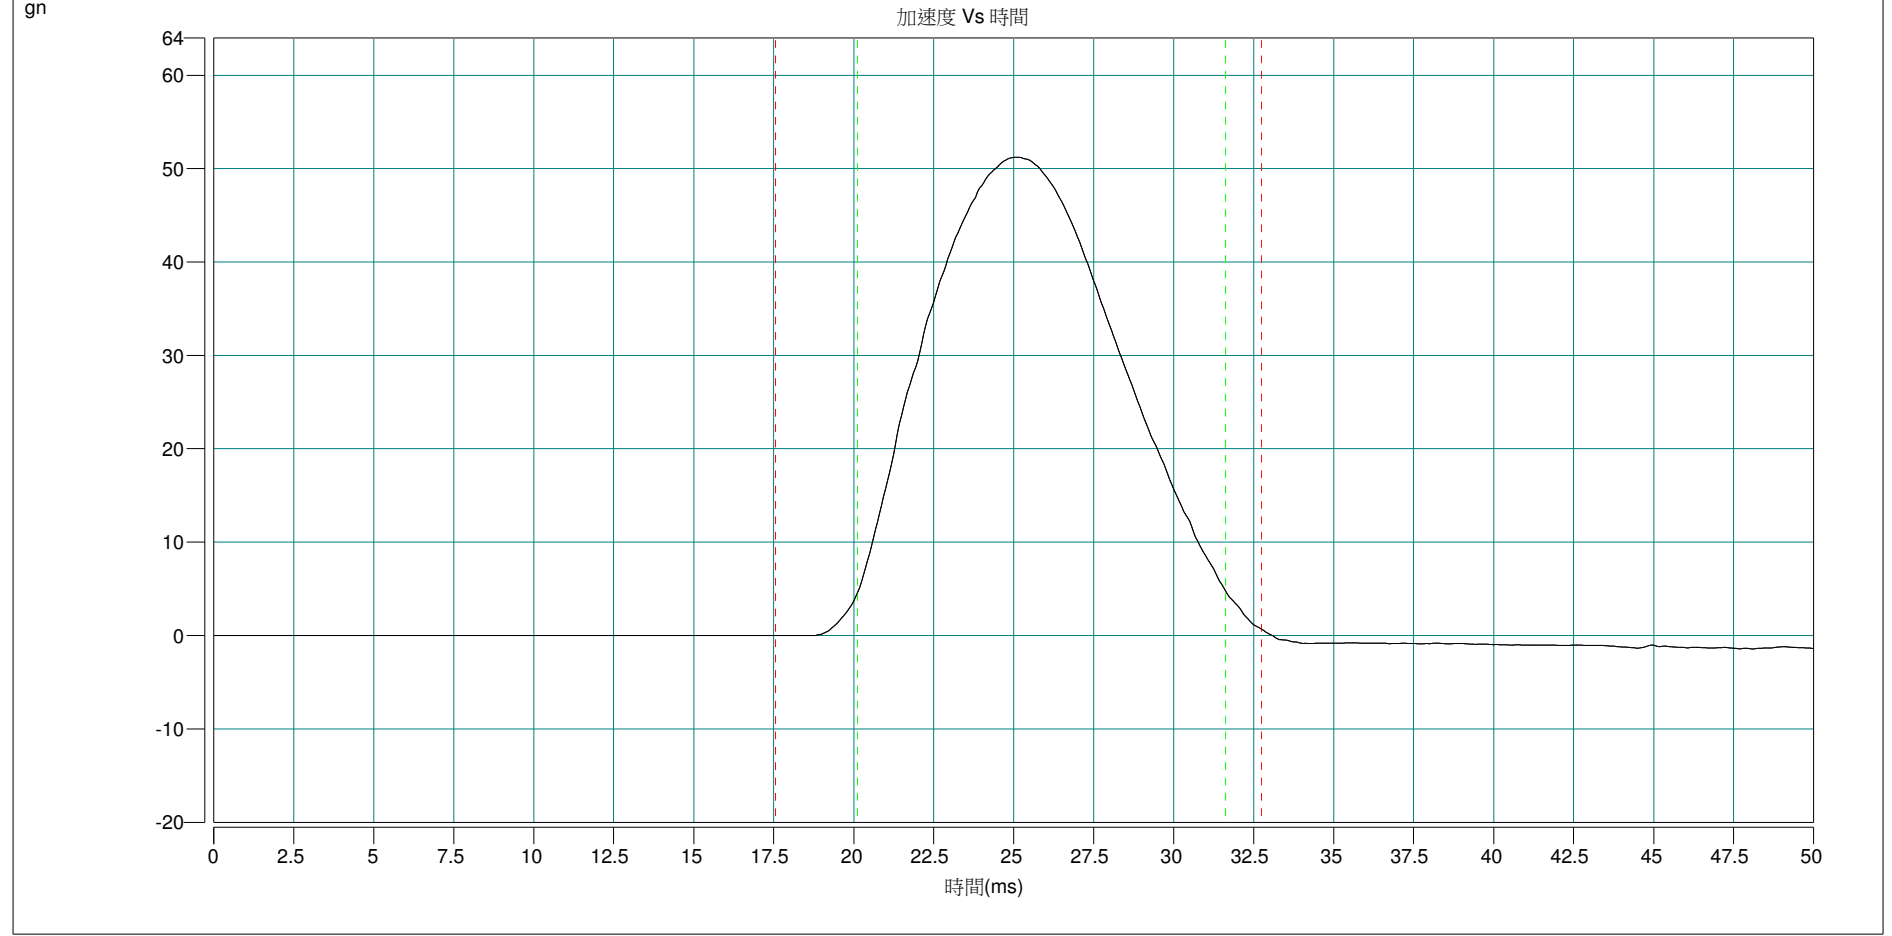


+Y axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.20	11.30	140.89	500.00	51.20	-1.16

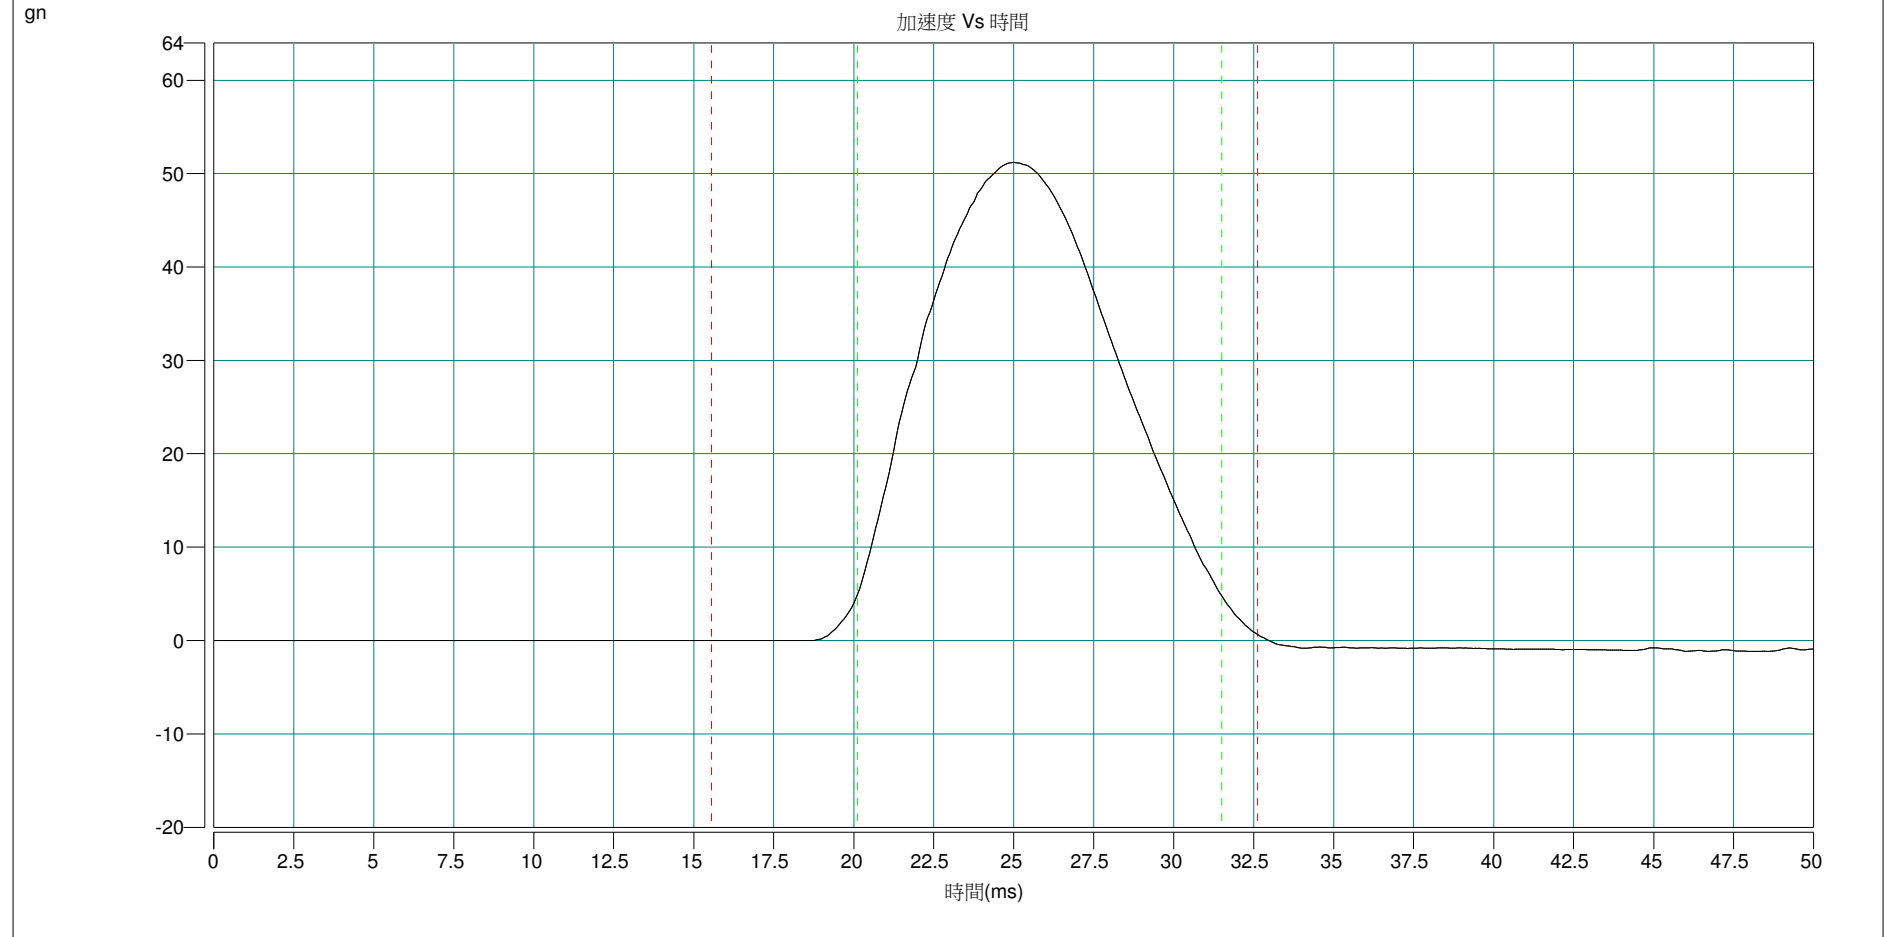


-Y axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.26	10.98	138.34	500.00	51.26	-0.91

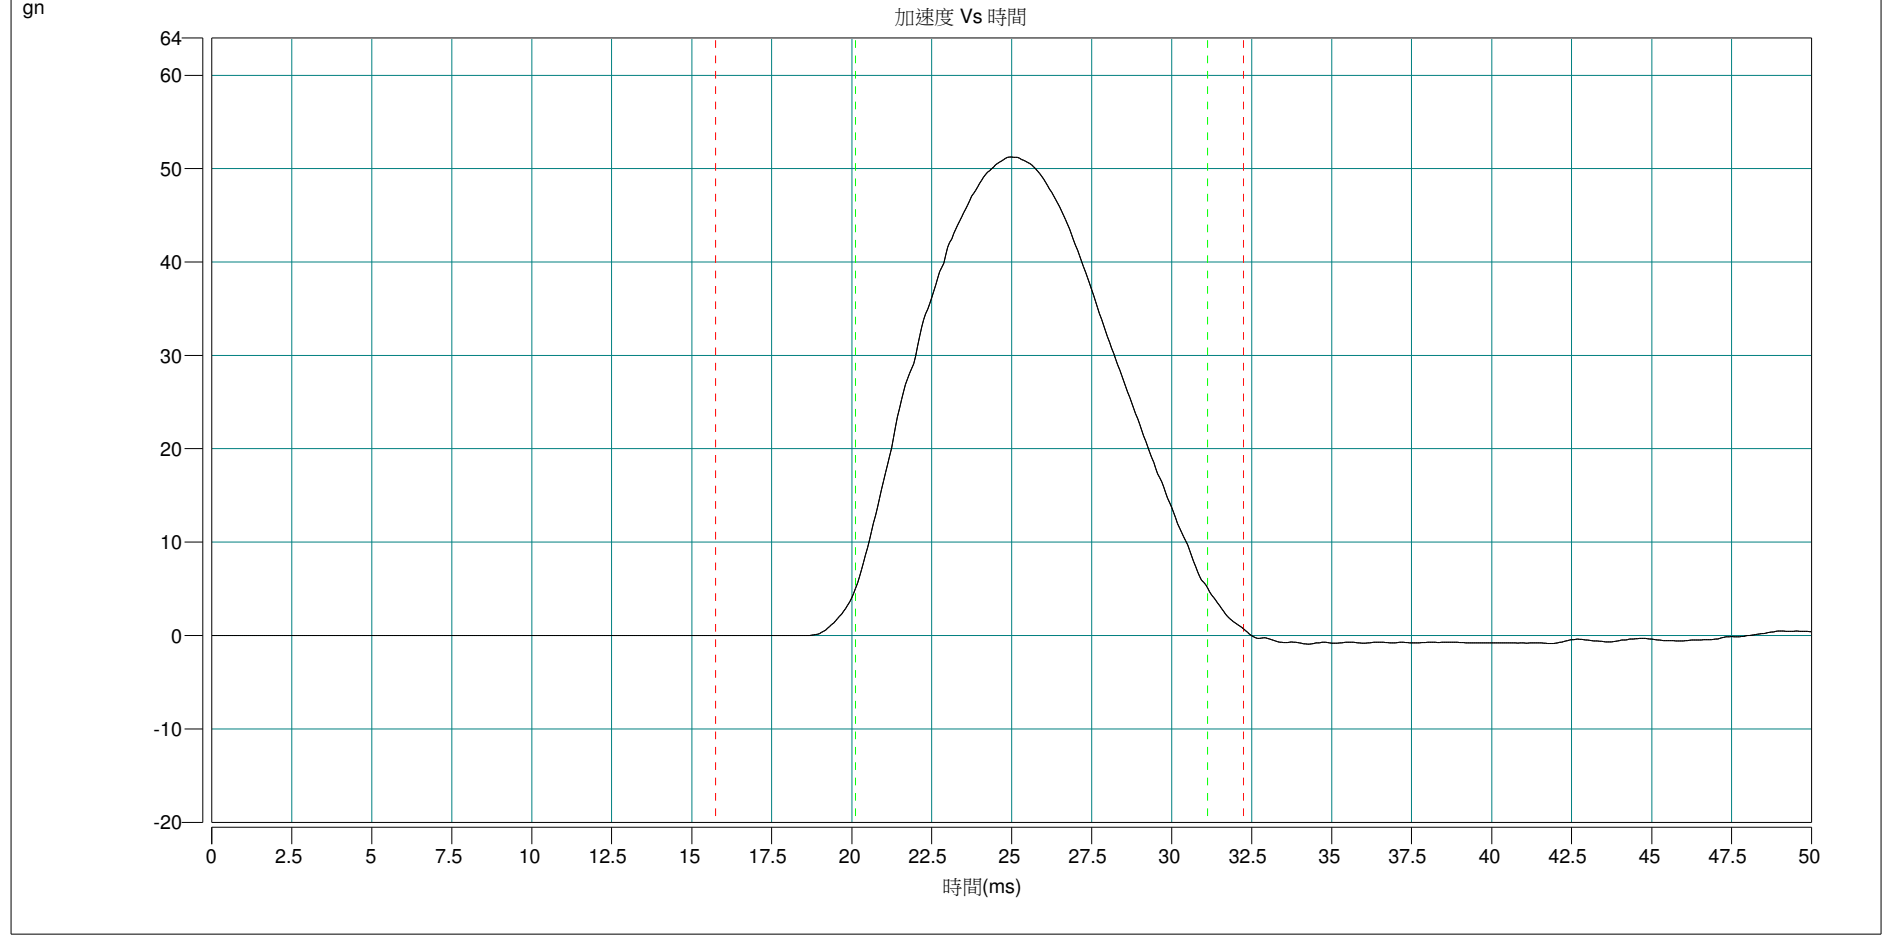


+Z axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.36	11.11	139.18	500.00	51.36	-0.91

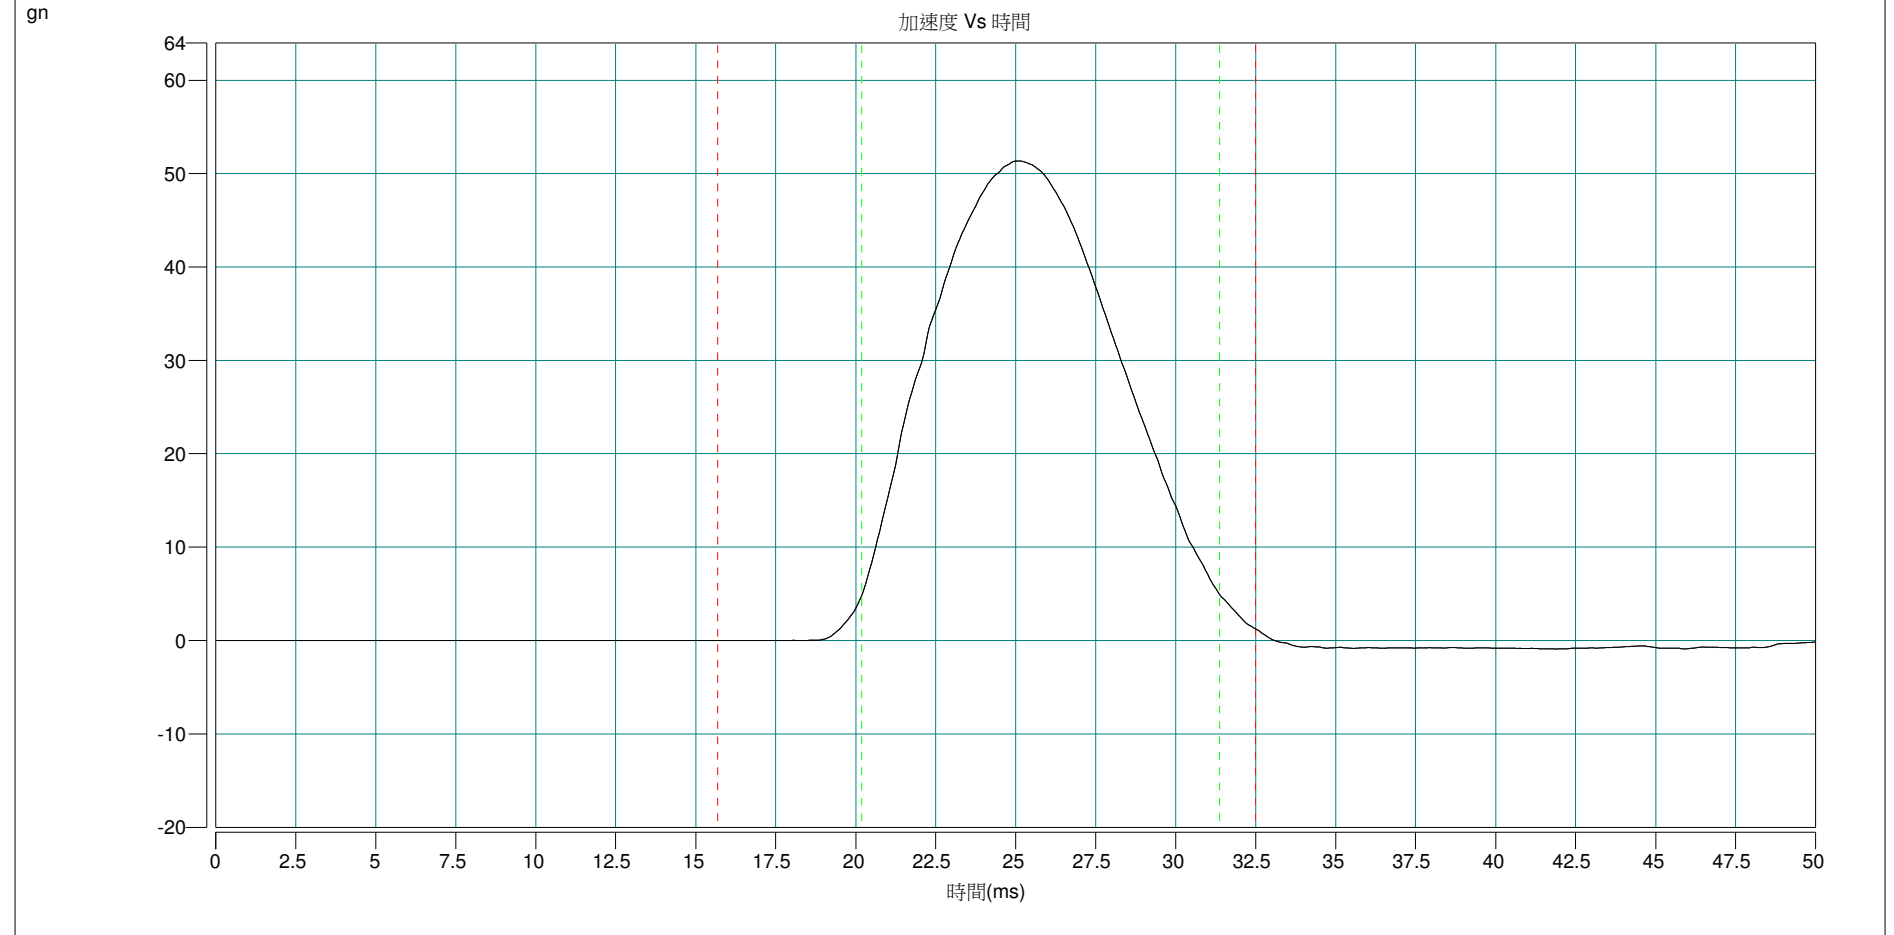

-Z axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.23	11.18	139.53	500.00	51.23	-0.96

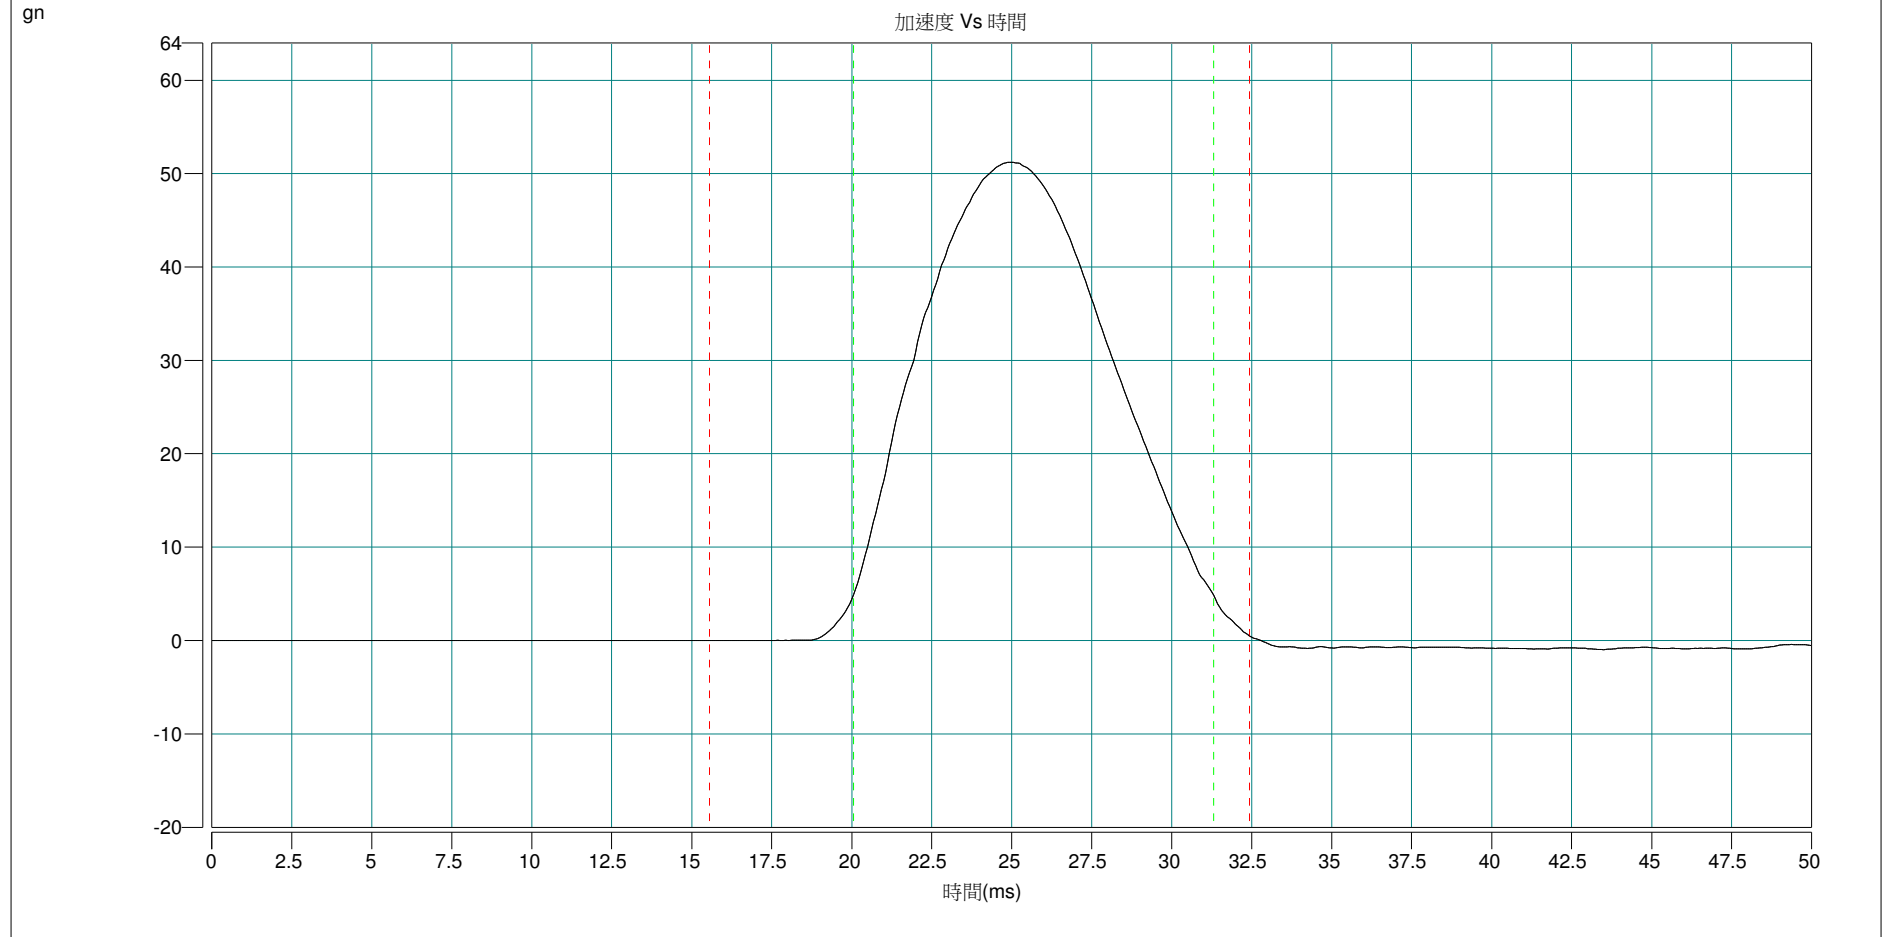

-END-