

KING DESIGN INDUSTRIAL CO., LTD.

VIBRATION TEST LABORATORY

4F, NO. 3, Lane 270, Pei Shen Road Sec. 3,

<http://www.kdi.tw>

Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C

<http://www.vibration.com.tw>

TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

E-mail: [service@kdi.tw](mailto:service@kdi.tw)

## TESTING / INSPECTION REPORT

REPORT NO : VT-180510-3

COMPANY : Apacer Technology Inc.

ADDRESS : 1F., No.32, Zhongcheng Rd., Tucheng Dist.,  
New Taipei City 236, Taiwan (R.O.C)

TEL : 886-2-2267-8000

FAX : 886-2-2267-2261

SPECIMEN : SATA Flash Drive

DATE OF RECEIVED : 2018/04/26

DATE OF TESTED : 2018/04/30

TEST / INSPECTION ITEMS : Vibration / Shock

## REMARKS :

- The laboratory is accredited by ISO/IEC 17025 General Requirements for the Competence of Calibration and Testing Laboratory.
- The results only apply to the device under test.
- This report is 26 pages, and no part of it may be abstracted or reproduced.

金頓科技實馬

Test Engineer :		<i>Peter Peng</i>
Approval Signatory :	<i>David Lee</i>	Laboratory Head :
<i>2018.5.19</i>		<i>Hsin-Tai Chang</i>

## TESTING / INSPECTION REPORT

### TESTING EQUIPMENT :

- |                         |   |
|-------------------------|---|
| 1.Vibration Tester      | : KING DESIGN KD-9363EM-600F2K-50N120,<br>S/N : KDS11054783 |
| 2.Controller            | : VCS-913+, S/N : 1312416                                   |
| 3.Control Accelerometer | : Wilcoxon Research WR-777, S/N : 4208                      |
| 4.Shock Testing System  | : KING DESIGN DP-1200-60, S/N : R2110086489                 |
| 5.Controller            | : DAS-105, S/N : 263210255                                  |
| 6.Accelerometer         | : B&K 4398, S/N : 2209044                                   |
| 7.Shock Testing System  | : KING DESIGN DP-1200-18, S/N : KDS02197998                 |
| 8.Controller            | : DAS-105, S/N : 263210255                                  |
| 9.Accelerometer         | : B&K 8339-001 S/N : 55869                                  |

### TEST ENVIRONMENT :

- |                   |                      |
|-------------------|----------------------|
| Temperature       | : 25°C (25±10°C)     |
| Relative Humidity | : 65% RH (50±25% RH) |

### SPECIMEN :

- |          |            |
|----------|------------|
| Model    | : Sx170-25 |
| Quantity | : 1 unit   |

## TESTING / INSPECTION REPORT

### TEST SPECIFICATION(1) :

#### **Comply with MIL-STD 810G 514.6 category 7**

Random Vibration test (Non-Operating)

Frequency : 15 Hz to 2,000 Hz

Accelerate : 4.02 g rms

P.S.D. : 0.01 g<sup>2</sup>/Hz (15Hz)

0.01 g<sup>2</sup>/Hz (105.94Hz)

+6 dB/Oct (105.94Hz to 150Hz)

0.02 g<sup>2</sup>/Hz (150Hz)

0.02 g<sup>2</sup>/Hz (500Hz)

-6 dB/Oct (500Hz to 2,000Hz)

0.0013 g<sup>2</sup>/Hz (2,000Hz)

Test Axis : X, Y, Z axis

Test Time : 1 hr (Each axis)

Total Test Time : 3 hrs

### TEST SPECIFICATION(2) :

#### **Comply with MIL-STD 810G 514.6 category 24**

Random Vibration test (Operating)

Frequency : 20 Hz to 2,000 Hz

Accelerate : 7.69 g rms

P.S.D. : 0.04 g<sup>2</sup>/Hz (20Hz to 1,000Hz)

: -6 dB/Oct (1,000Hz to 2,000Hz)

Test Axis : X, Y, Z axis

Test Time : 1 hr (Each axis)

Total Test Time : 3 hrs

## TESTING / INSPECTION REPORT

### TEST SPECIFICATION(3) :

#### ***Comply with MIL-STD-883K Method 2002.5***

Wave Form : Half sine wave (Non-Operating)  
 Acceleration : 1,500 g  
 Duration Time : 0.5 mS  
 No. of Shock : Each axis 3 times  
 Shock Direction :  $\pm X$ ,  $\pm Y$ ,  $\pm Z$  axis

### TEST SPECIFICATION(4) :


#### ***As per applicant's requirement***

Wave Form : Half sine wave (Operating)  
 Acceleration : 50 g  
 Duration Time : 11 mS  
 No. of Shock : Each axis 3 times  
 Shock Direction :  $\pm X$ ,  $\pm Y$ ,  $\pm Z$  axis







### TEST RESULT :

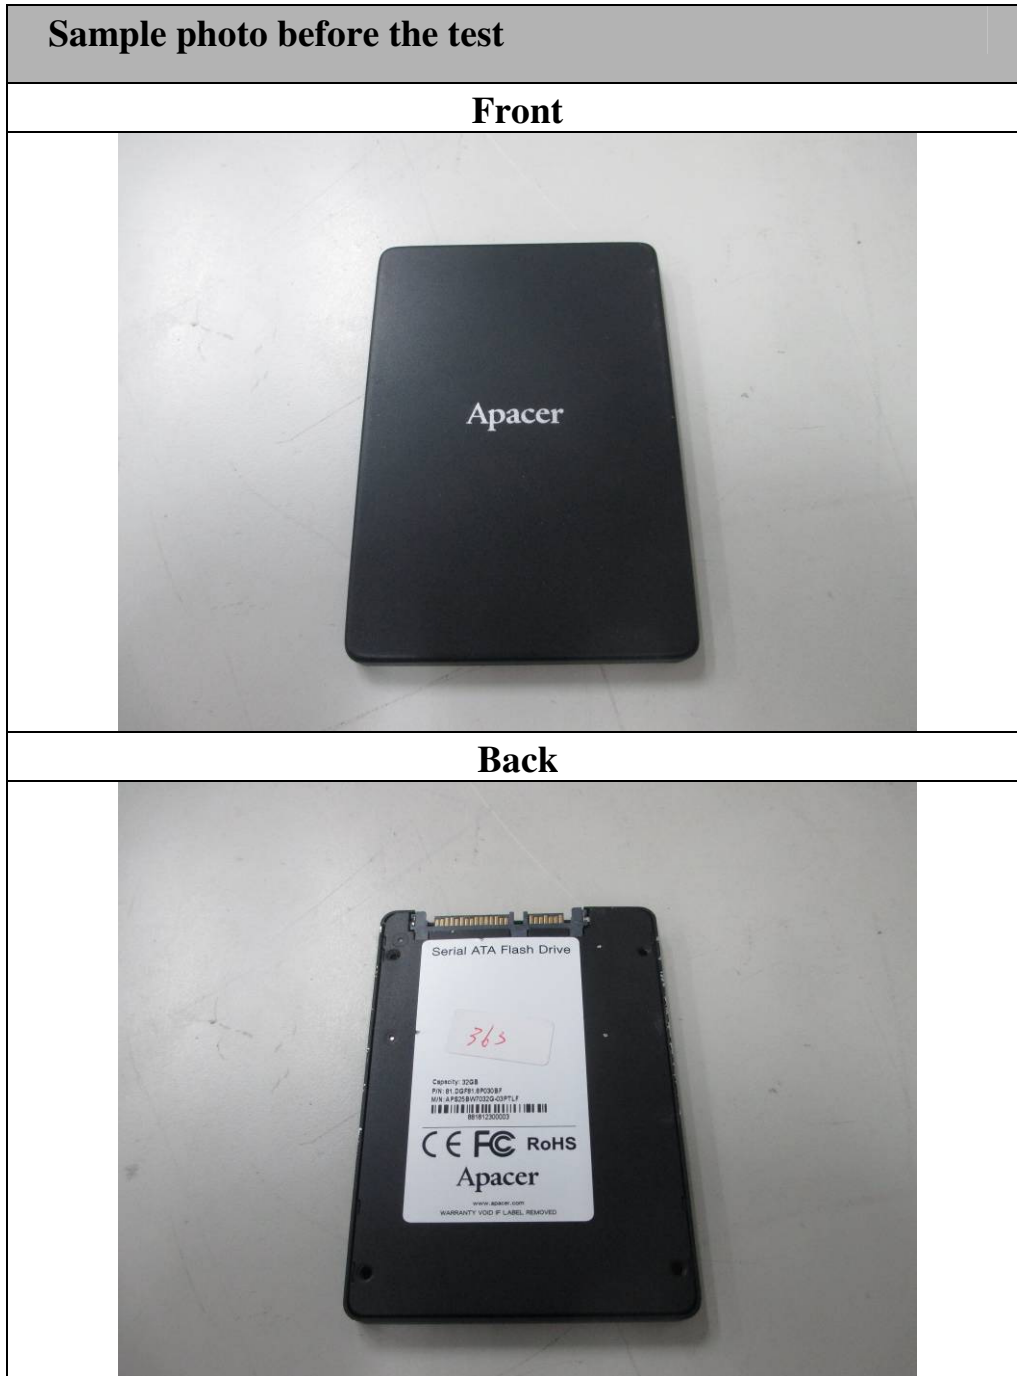Describe	PASS	FAIL	Non-Judgment
Function judgment <sup>(1)</sup>	√	---	---
Appearance check <sup>(2)</sup>	√	---	---
(1)--Burn in function was normal after the test.			
(2)--No visible damages were found after the test.			


## TESTING / INSPECTION REPORT



## TESTING / INSPECTION REPORT





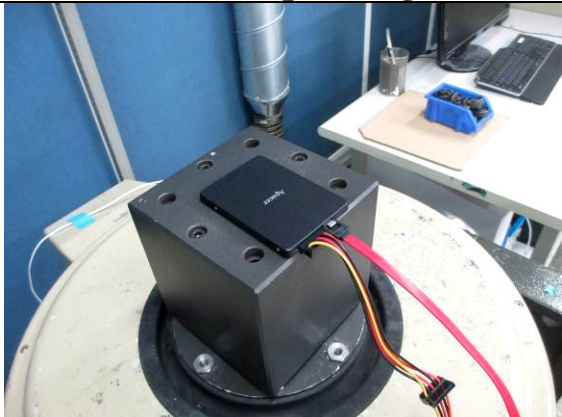
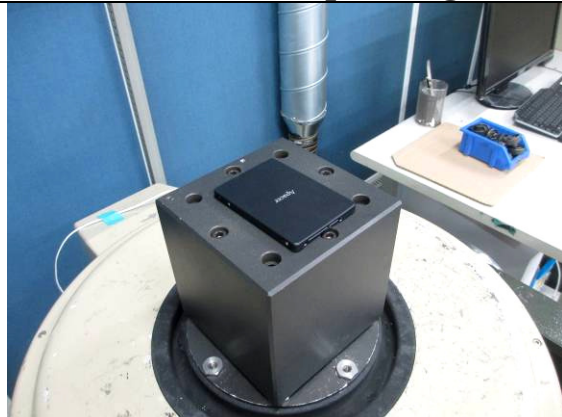
Vibration testing photos	
<b>X axis (Operating)</b>	<b>X axis (Non-Operating)</b>
	
<b>Y axis (Operating)</b>	<b>Y axis (Non-Operating)</b>
	
<b>Z axis (Operating)</b>	<b>Z axis (Non-Operating)</b>
	

## TESTING / INSPECTION REPORT

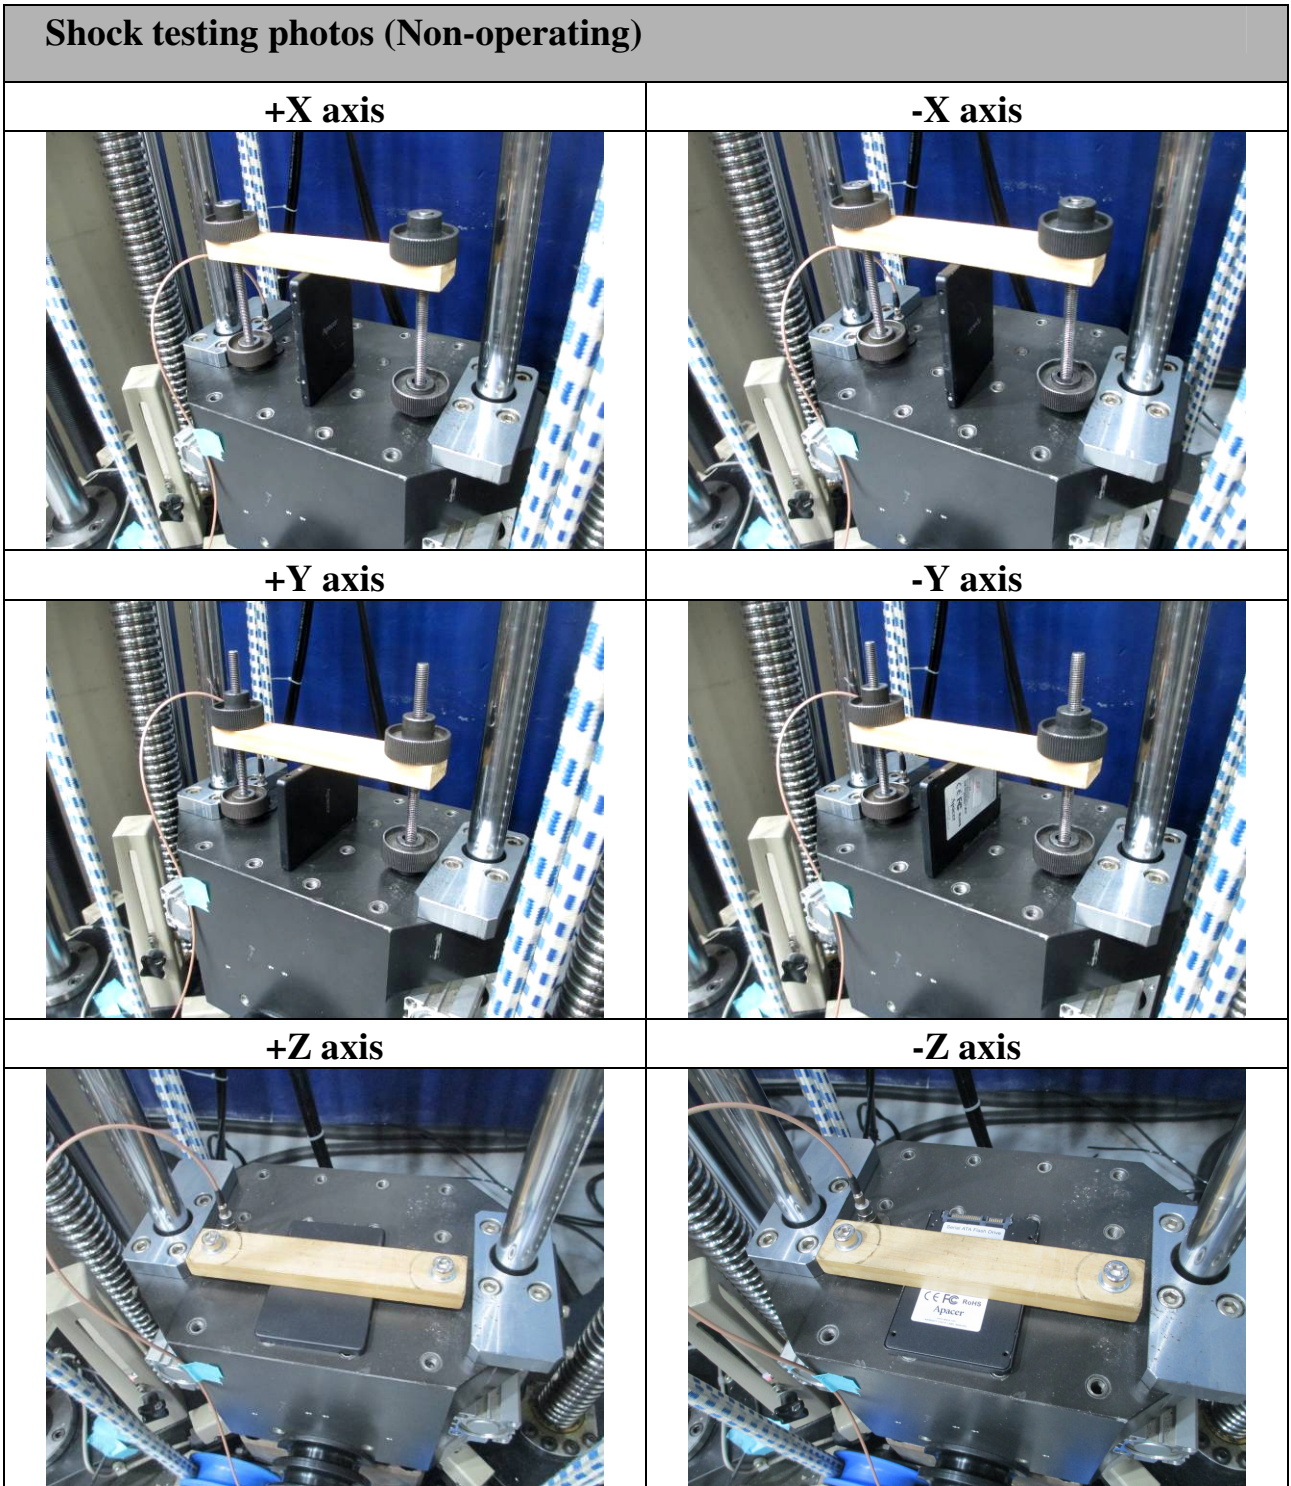


## TESTING / INSPECTION REPORT

### Shock testing photos (Operating)

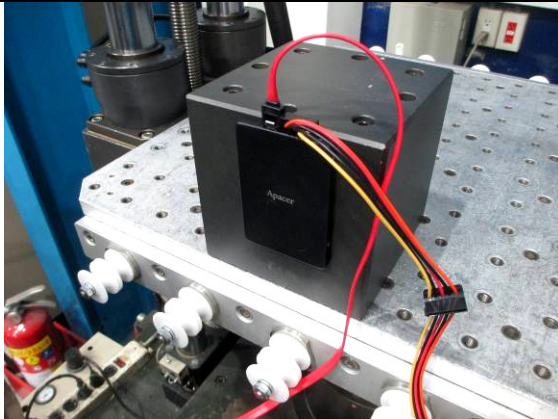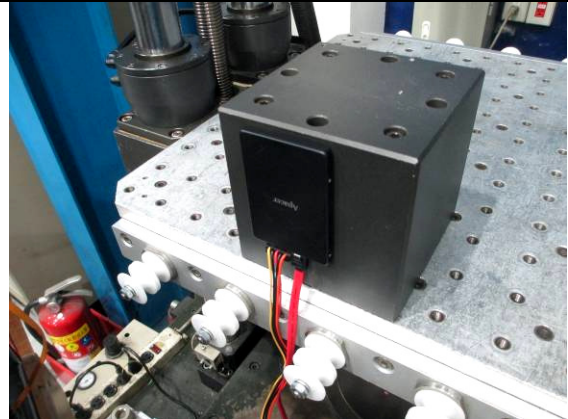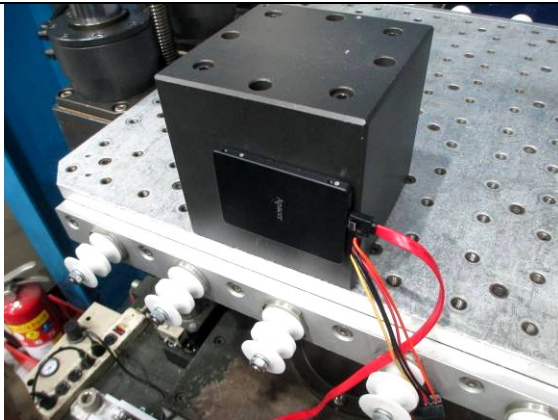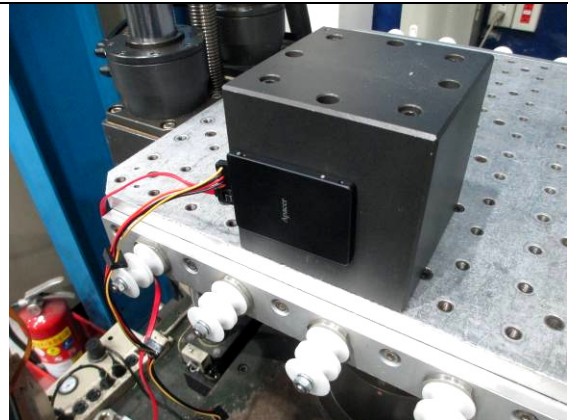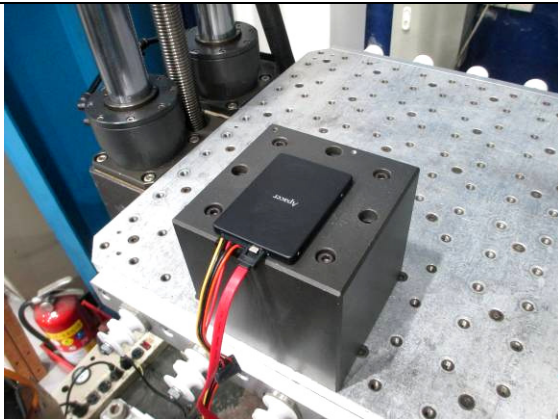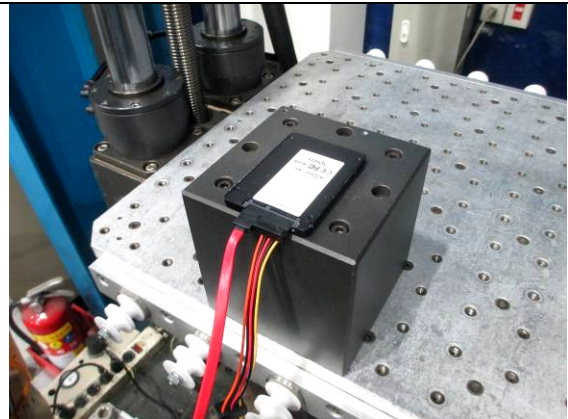**+X axis**

**-X axis**

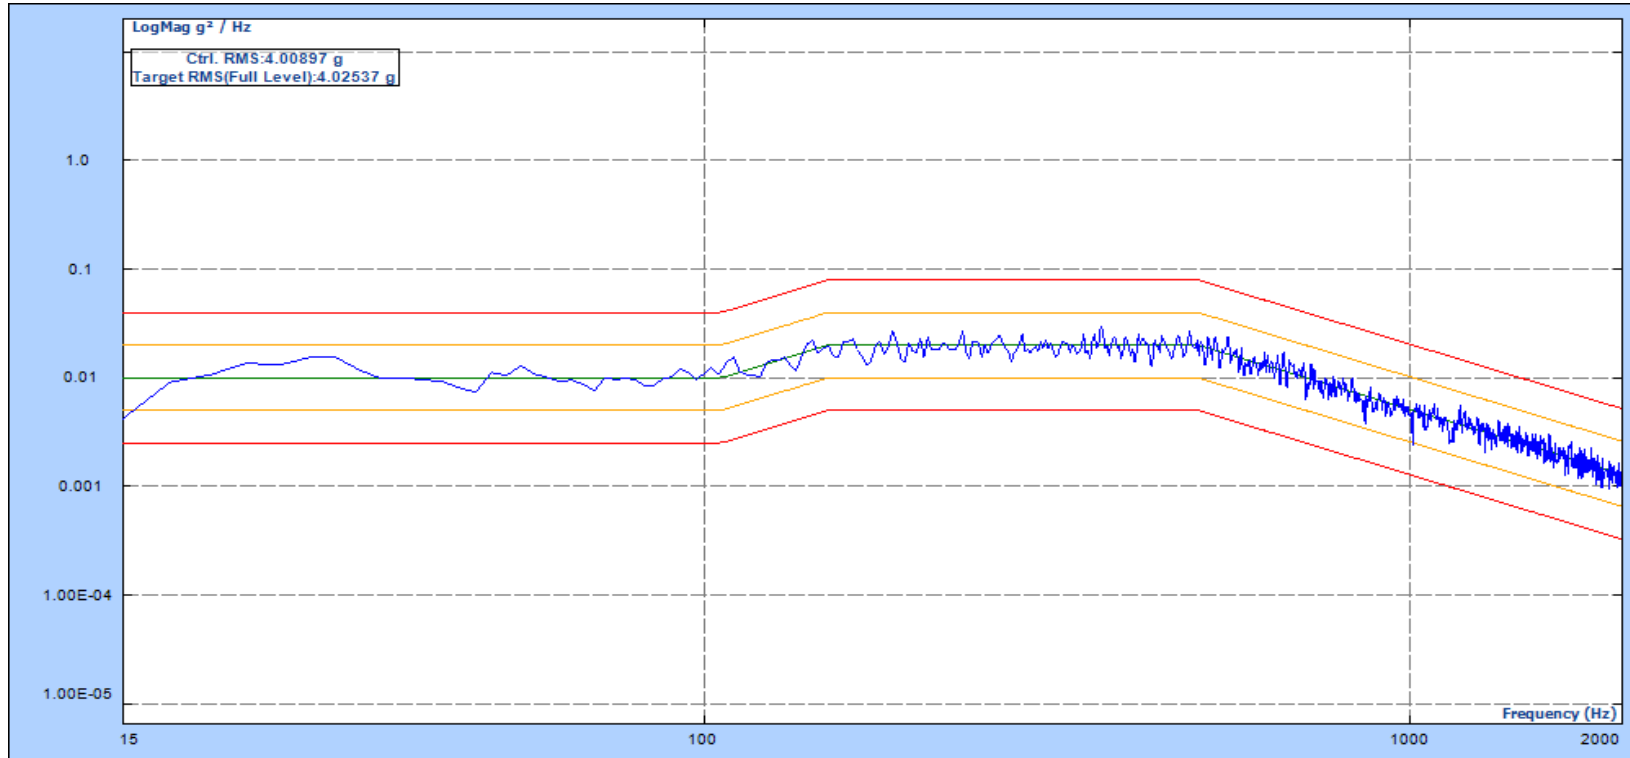**+Y axis**

**-Y axis**

**+Z axis**

**-Z axis**


X axis



Level: 100.00 %  
Velocity Pk: 0.130 m/s  
Remaining: 00:00:00

Drive Pk: 1.279V  
Control RMS: 4.009 g  
Total Elapsed: 01:00:59

Est. Disp. : 1.543 mm Pk-Pk  
Target RMS: 4.020 g  
Full Level Elapsed: 01:00:00

Y axis



Level: 100.00 %  
Velocity Pk: 0.127 m/s  
Remaining: 00:00:00

Drive Pk: 0.922V  
Control RMS: 3.967 g  
Total Elapsed: 01:00:59

Est. Disp. : 1.490 mm Pk-Pk  
Target RMS: 4.020 g  
Full Level Elapsed: 01:00:00

Z axis




Level: 100.00 %  
Velocity Pk: 0.127 m/s  
Remaining: 00:00:00

Drive Pk: 0.990V  
Control RMS: 4.008 g  
Total Elapsed: 01:00:59

Est. Disp. : 1.513 mm Pk-Pk  
Target RMS: 4.020 g  
Full Level Elapsed: 01:00:00

X axis

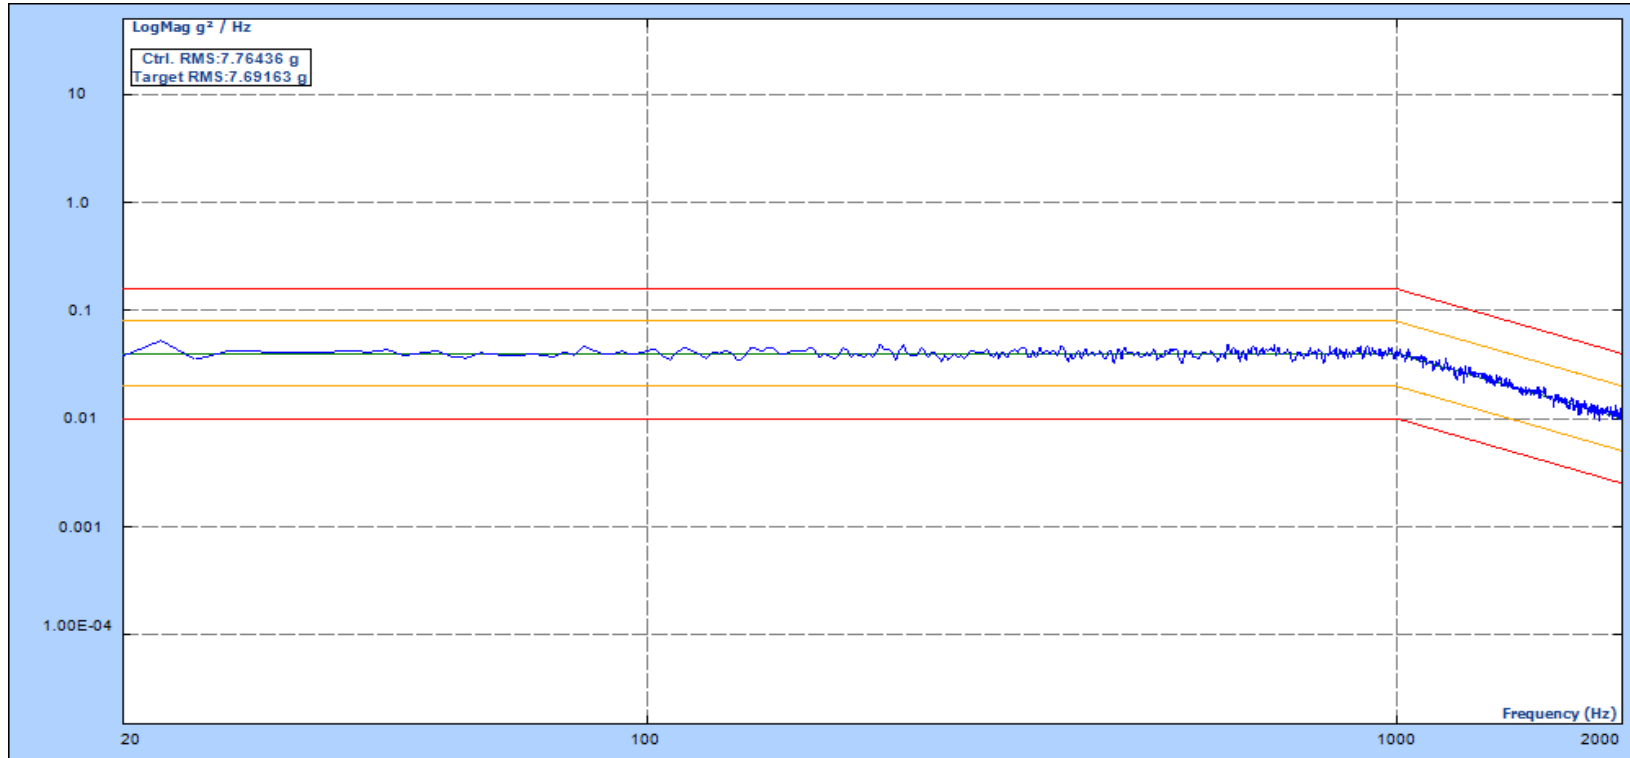


Level: 100.00 %  
Velocity Pk: 0.218 m/s  
Remaining: 00:00:00

Drive Pk: 2.172V  
Control RMS: 7.764 g  
Total Elapsed: 01:01:09

Est. Disp. : 2.162 mm Pk-Pk  
Target RMS: 7.690 g  
Full Level Elapsed: 01:00:00

Y axis

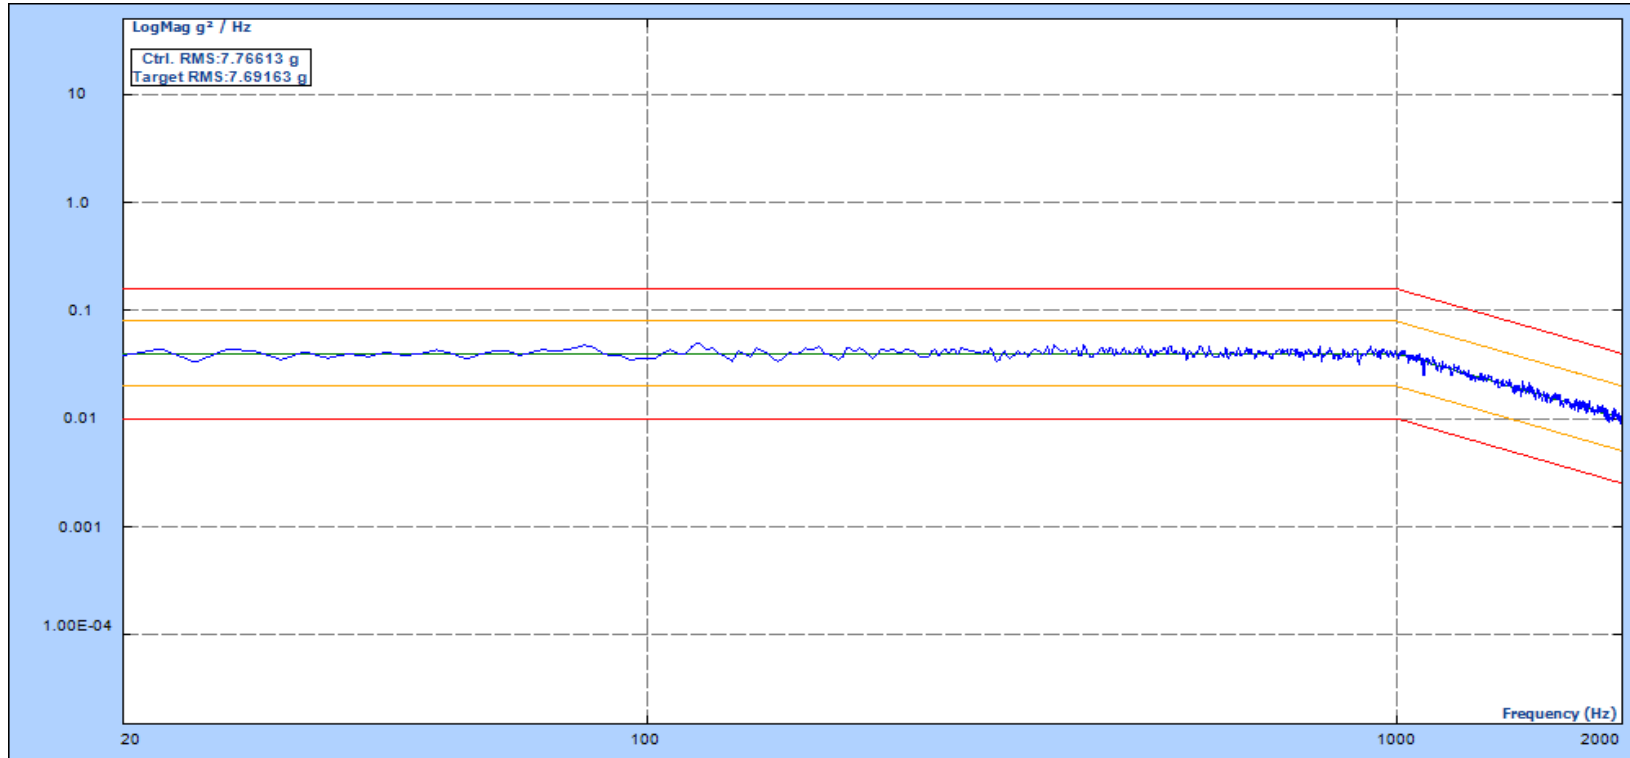


Level: 100.00 %  
Velocity Pk: 0.215 m/s  
Remaining: 00:00:00

Drive Pk: 2.123V  
Control RMS: 7.766 g  
Total Elapsed: 01:01:09

Est. Disp. : 2.109 mm Pk-Pk  
Target RMS: 7.690 g  
Full Level Elapsed: 01:00:00

Z axis

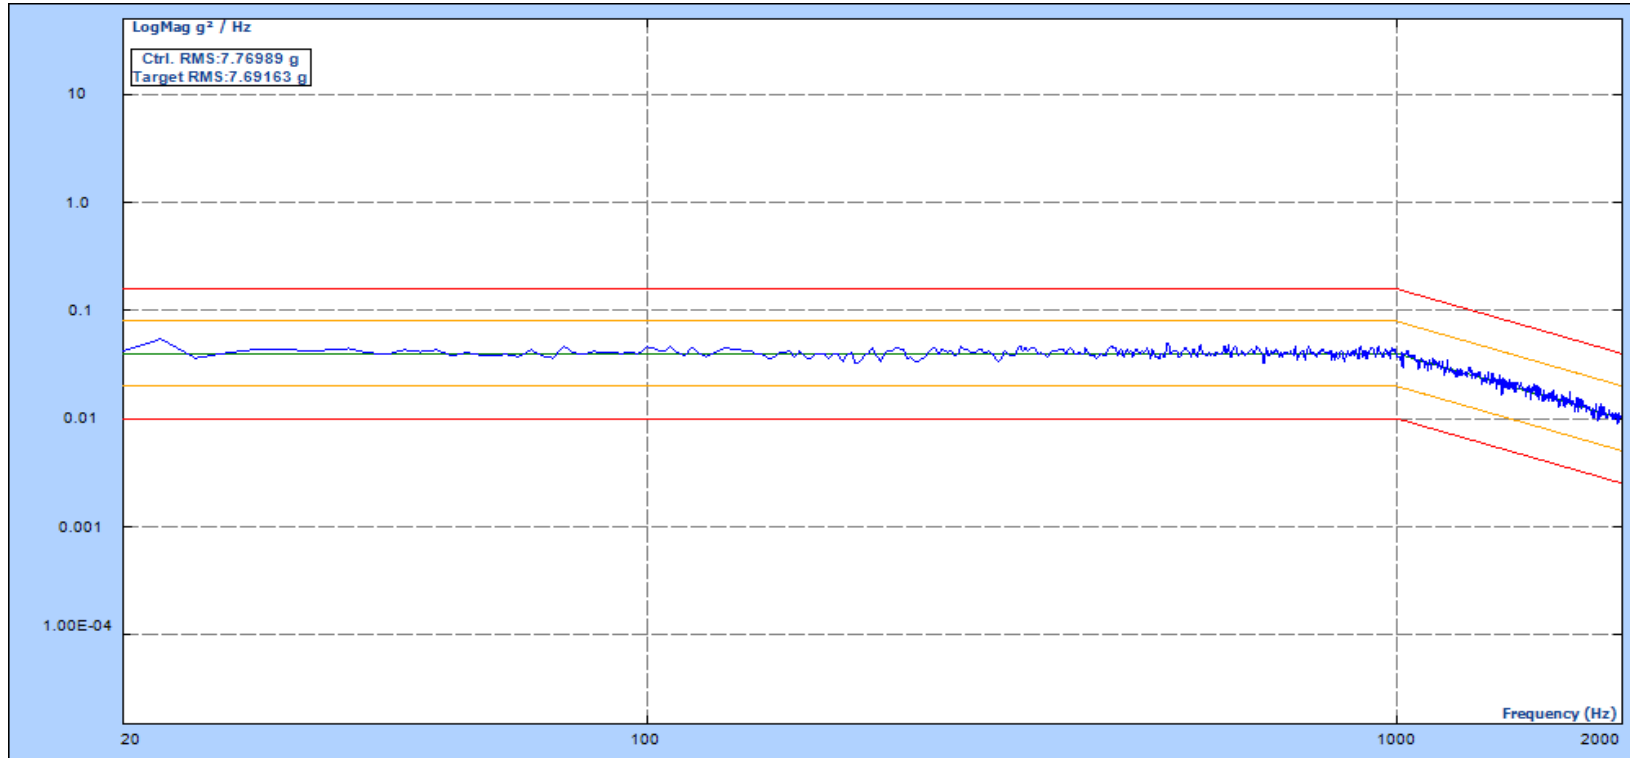


Level: 100.00 %  
Velocity Pk: 0.222 m/s  
Remaining: 00:00:00

Drive Pk: 2.241V  
Control RMS: 7.770 g  
Total Elapsed: 01:01:08

Est. Disp. : 2.215 mm Pk-Pk  
Target RMS: 7.690 g  
Full Level Elapsed: 01:00:00


+X axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1508.09	0.54	195.15	10000.00	1508.09	-218.52

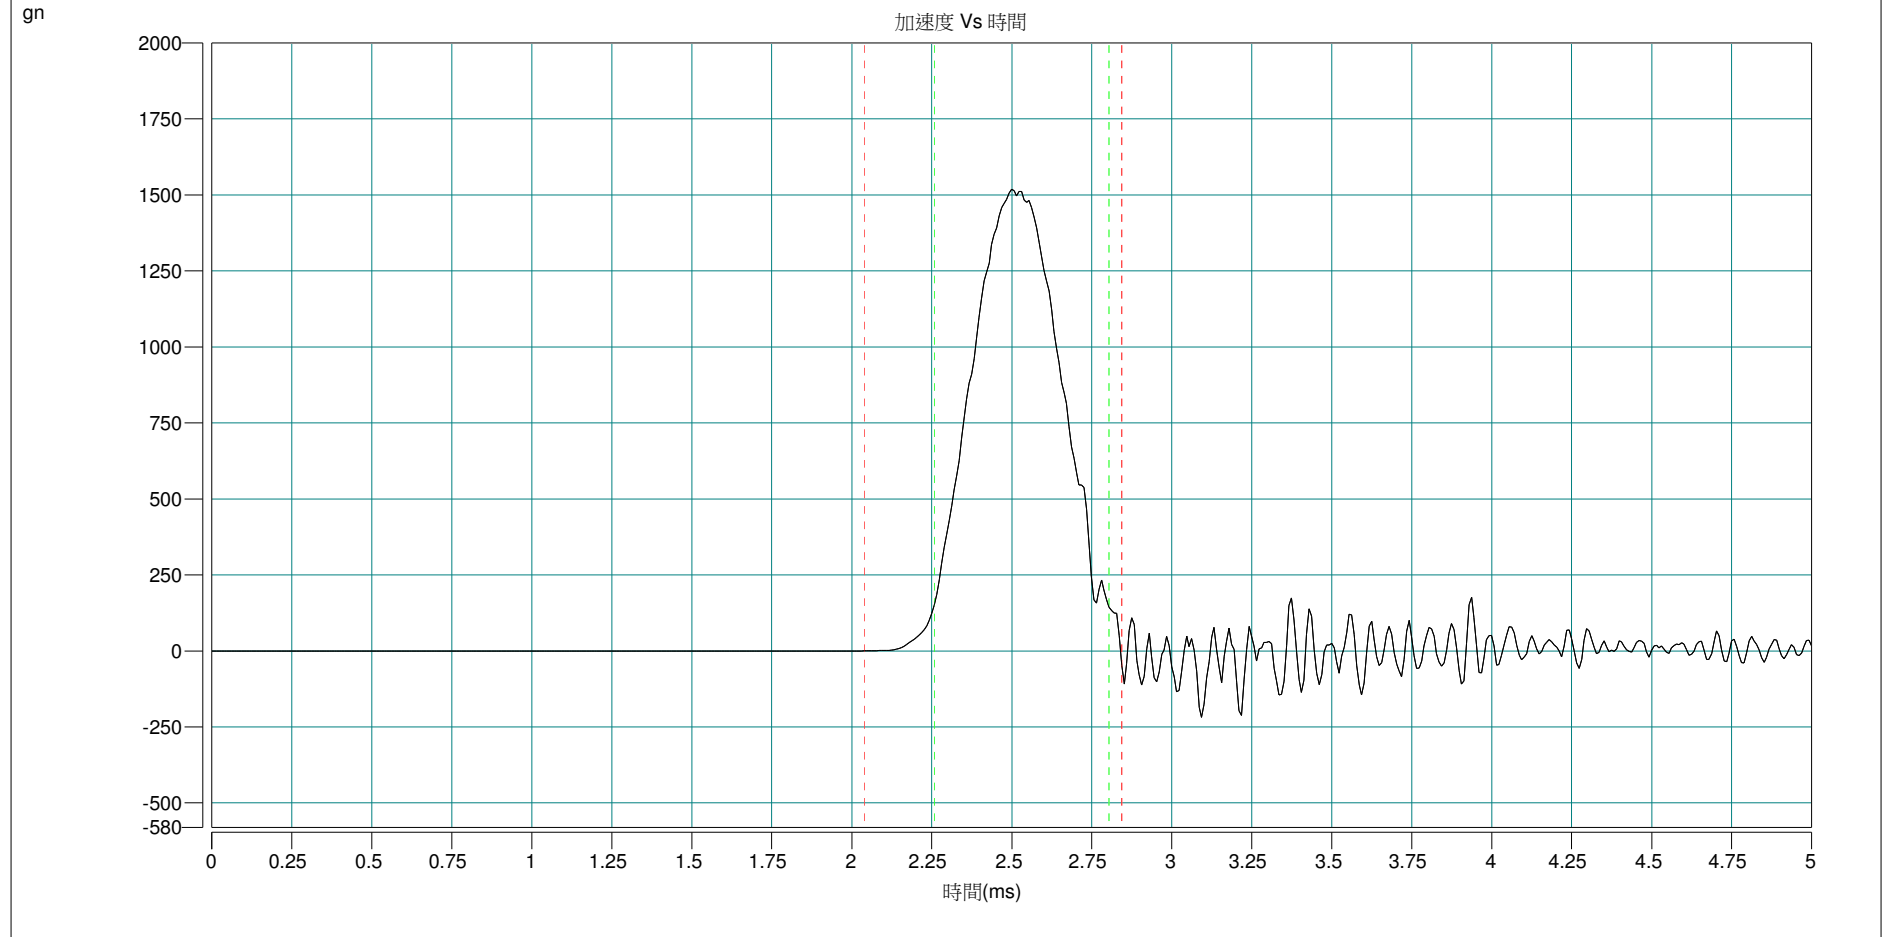


-X axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1514.71	0.54	197.45	10000.00	1514.71	-217.85

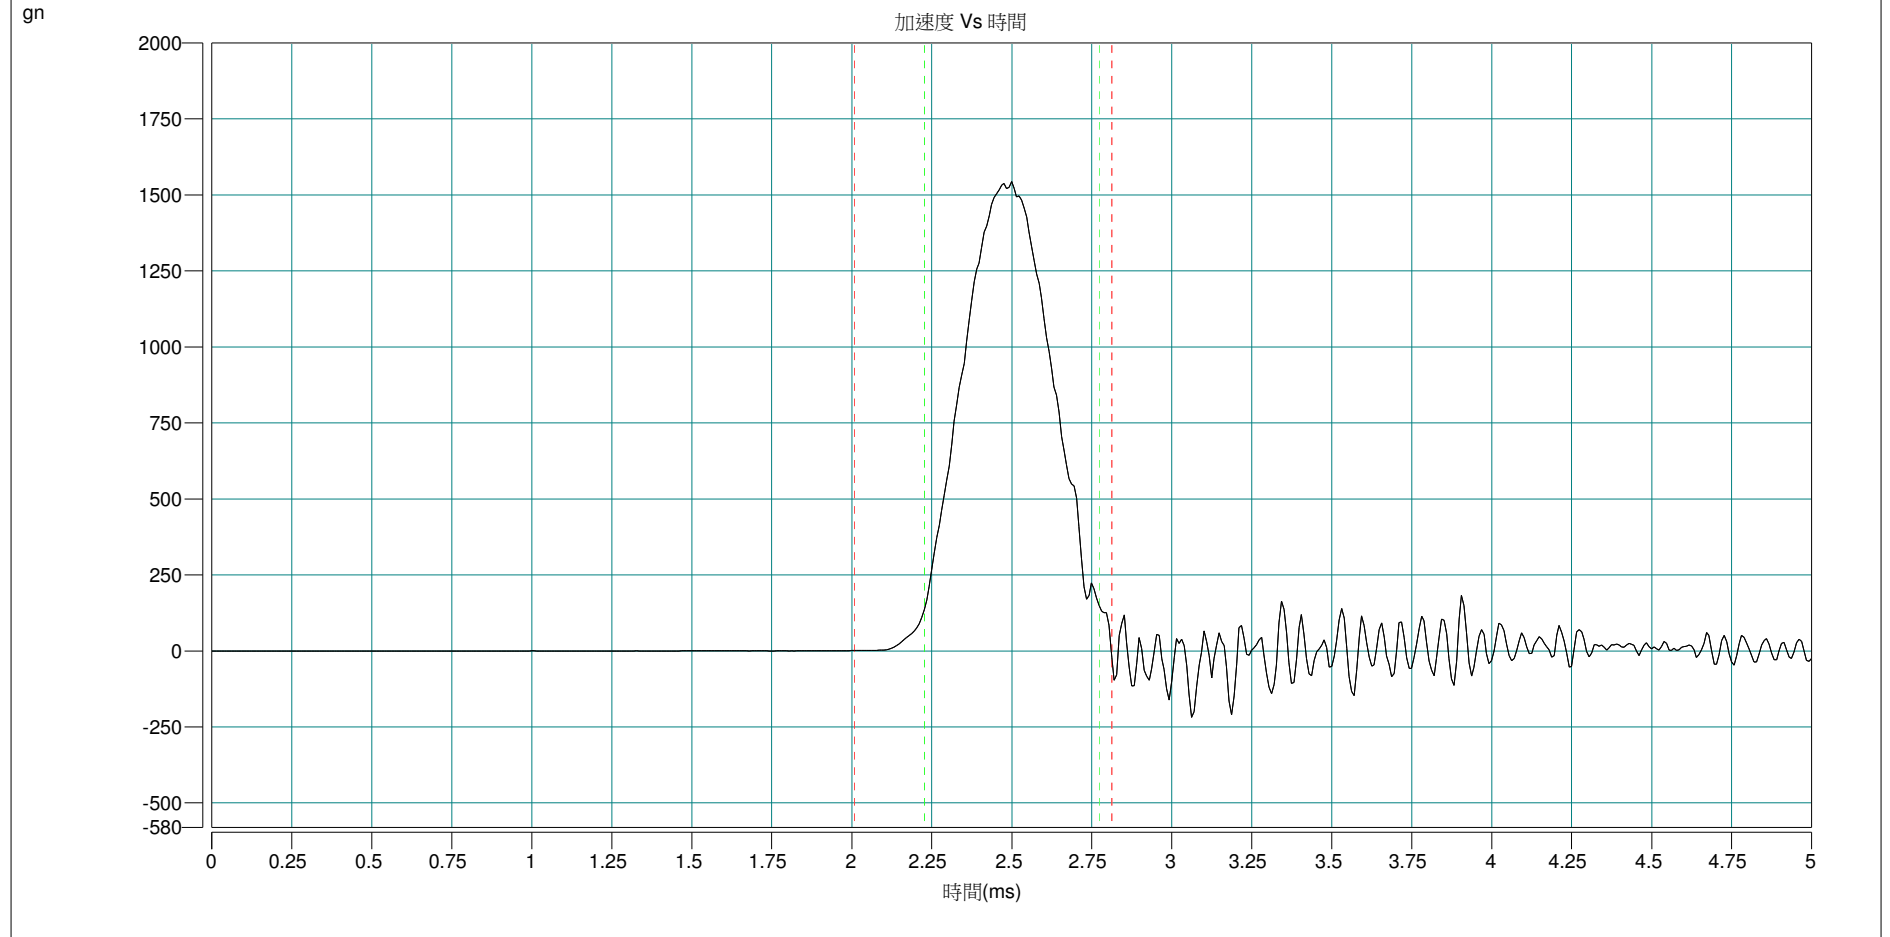


+Y axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1523.25	0.50	194.80	10000.00	1523.25	-198.33

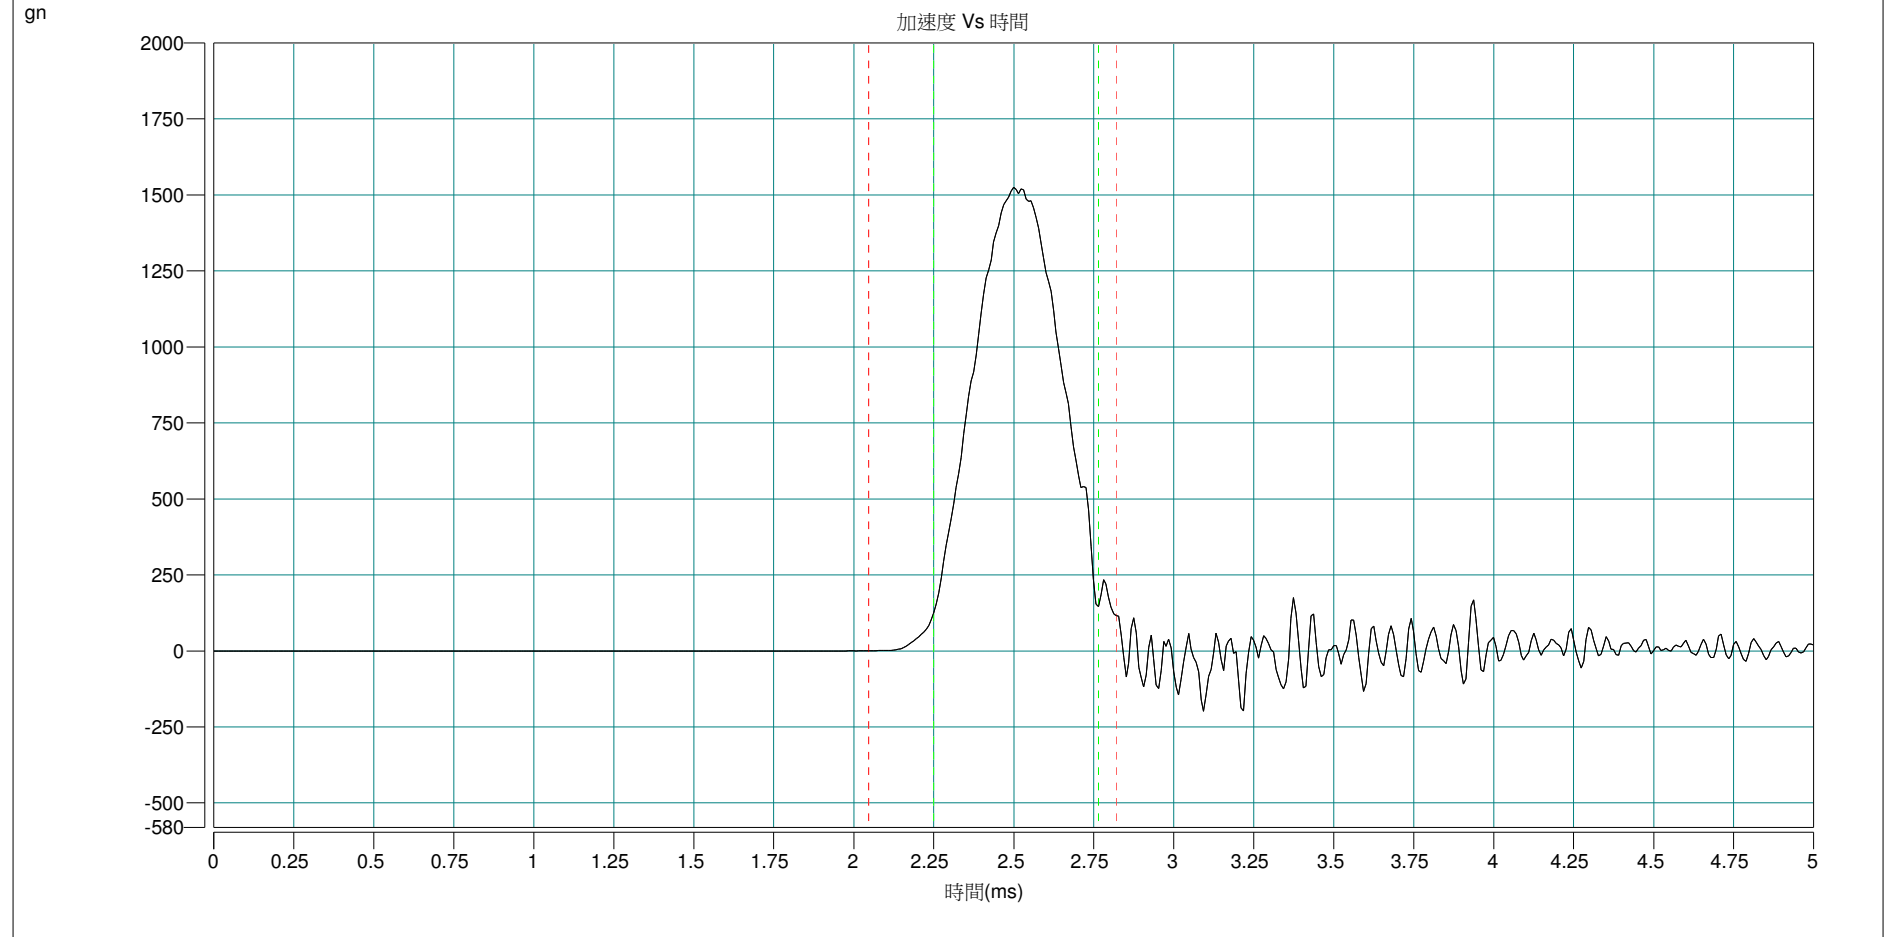


-Y axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1529.38	0.50	195.32	10000.00	1529.38	-232.59

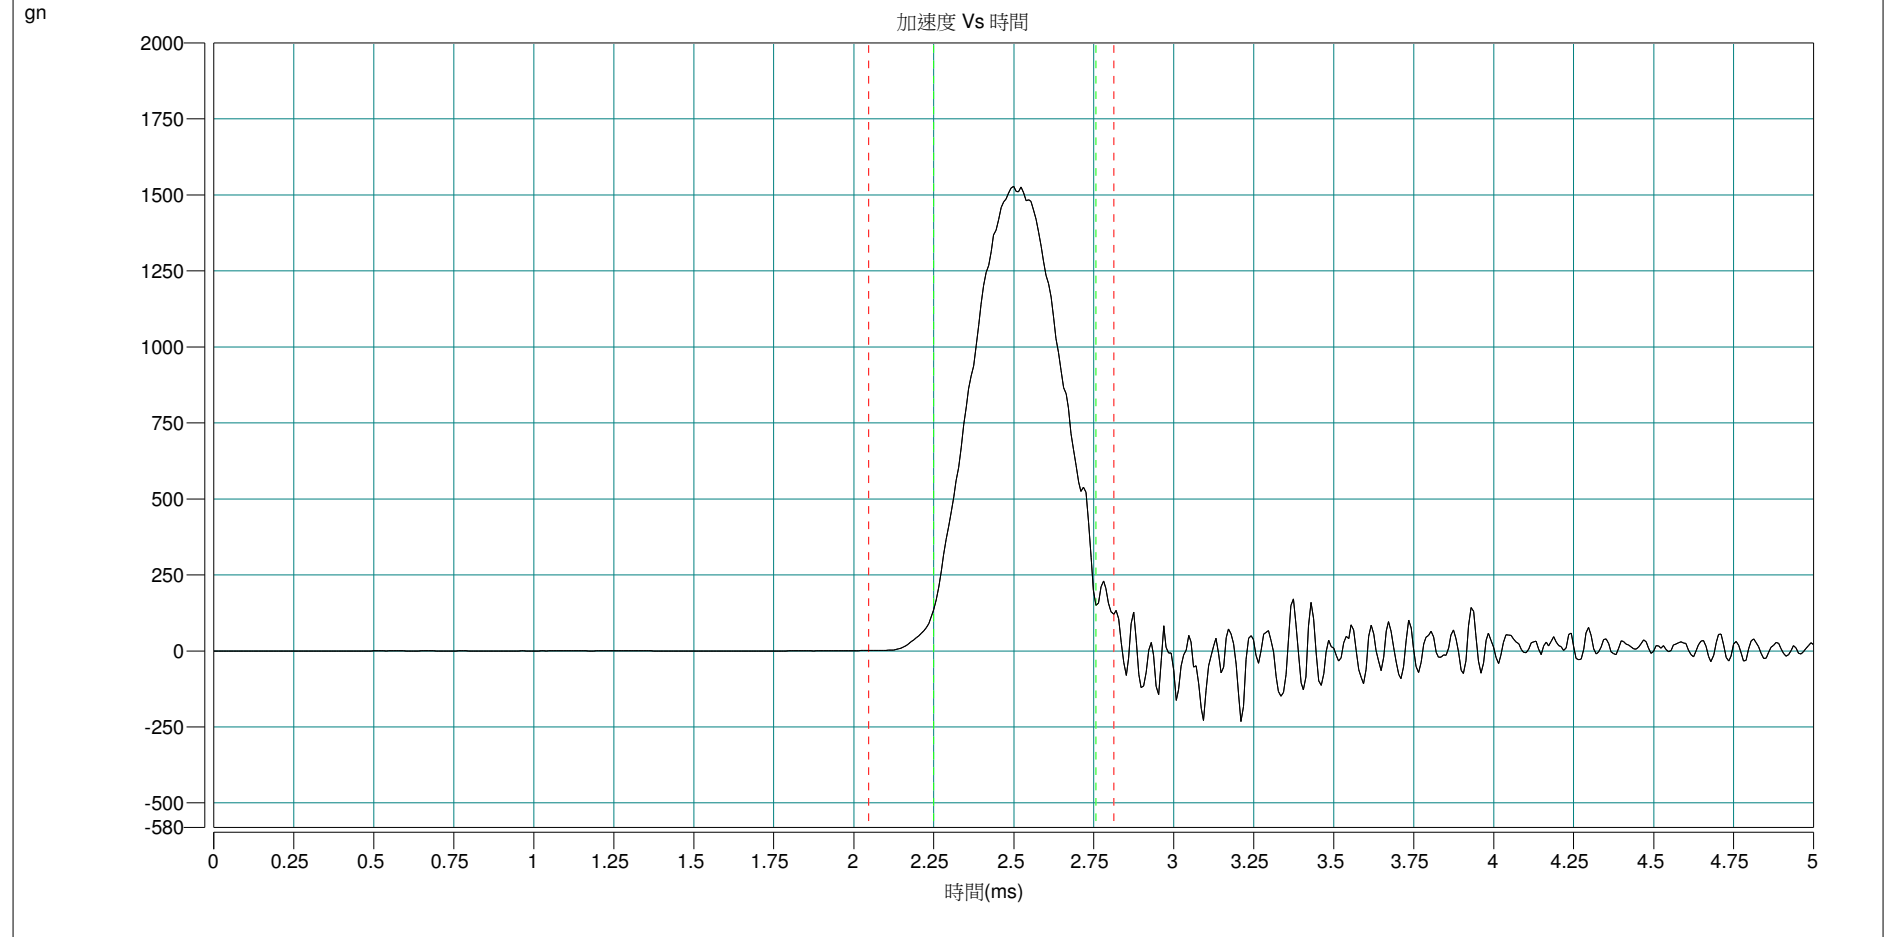


+Z axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1517.32	0.56	195.23	10000.00	1517.32	-220.79

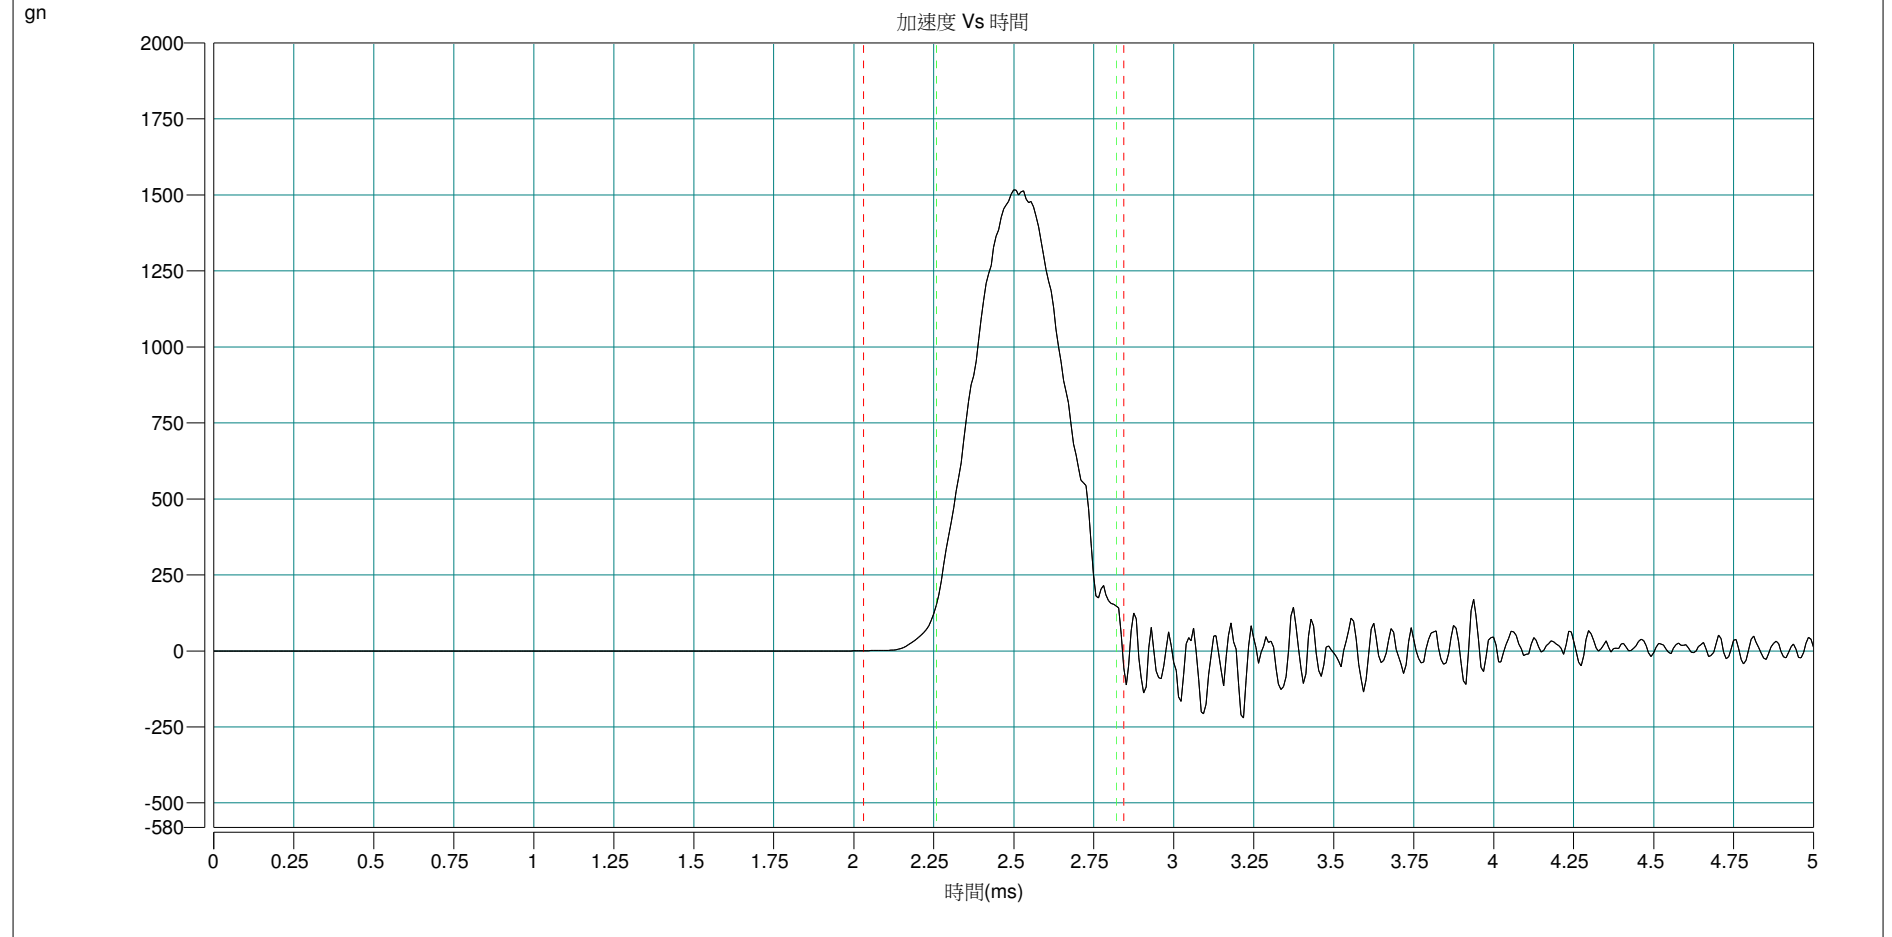


-Z axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	1528.46	0.56	195.97	10000.00	1528.46	-232.91

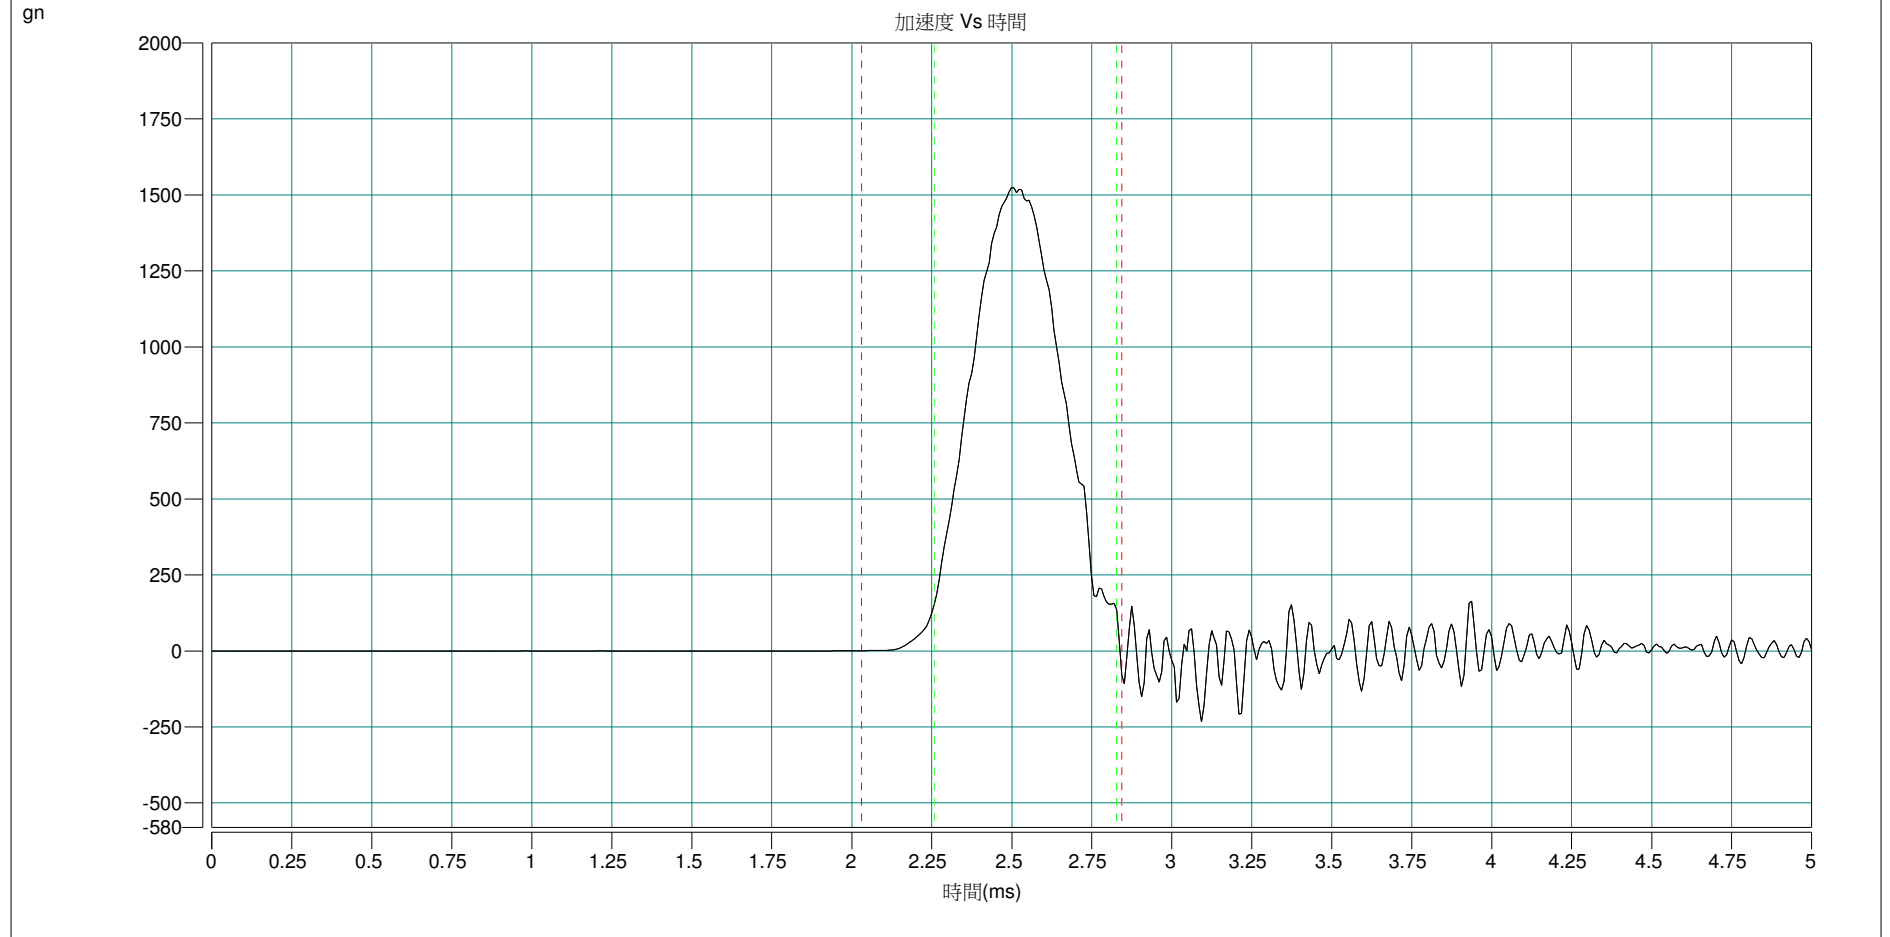


+X axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.36	10.84	3.39	500.00	51.36	-3.19

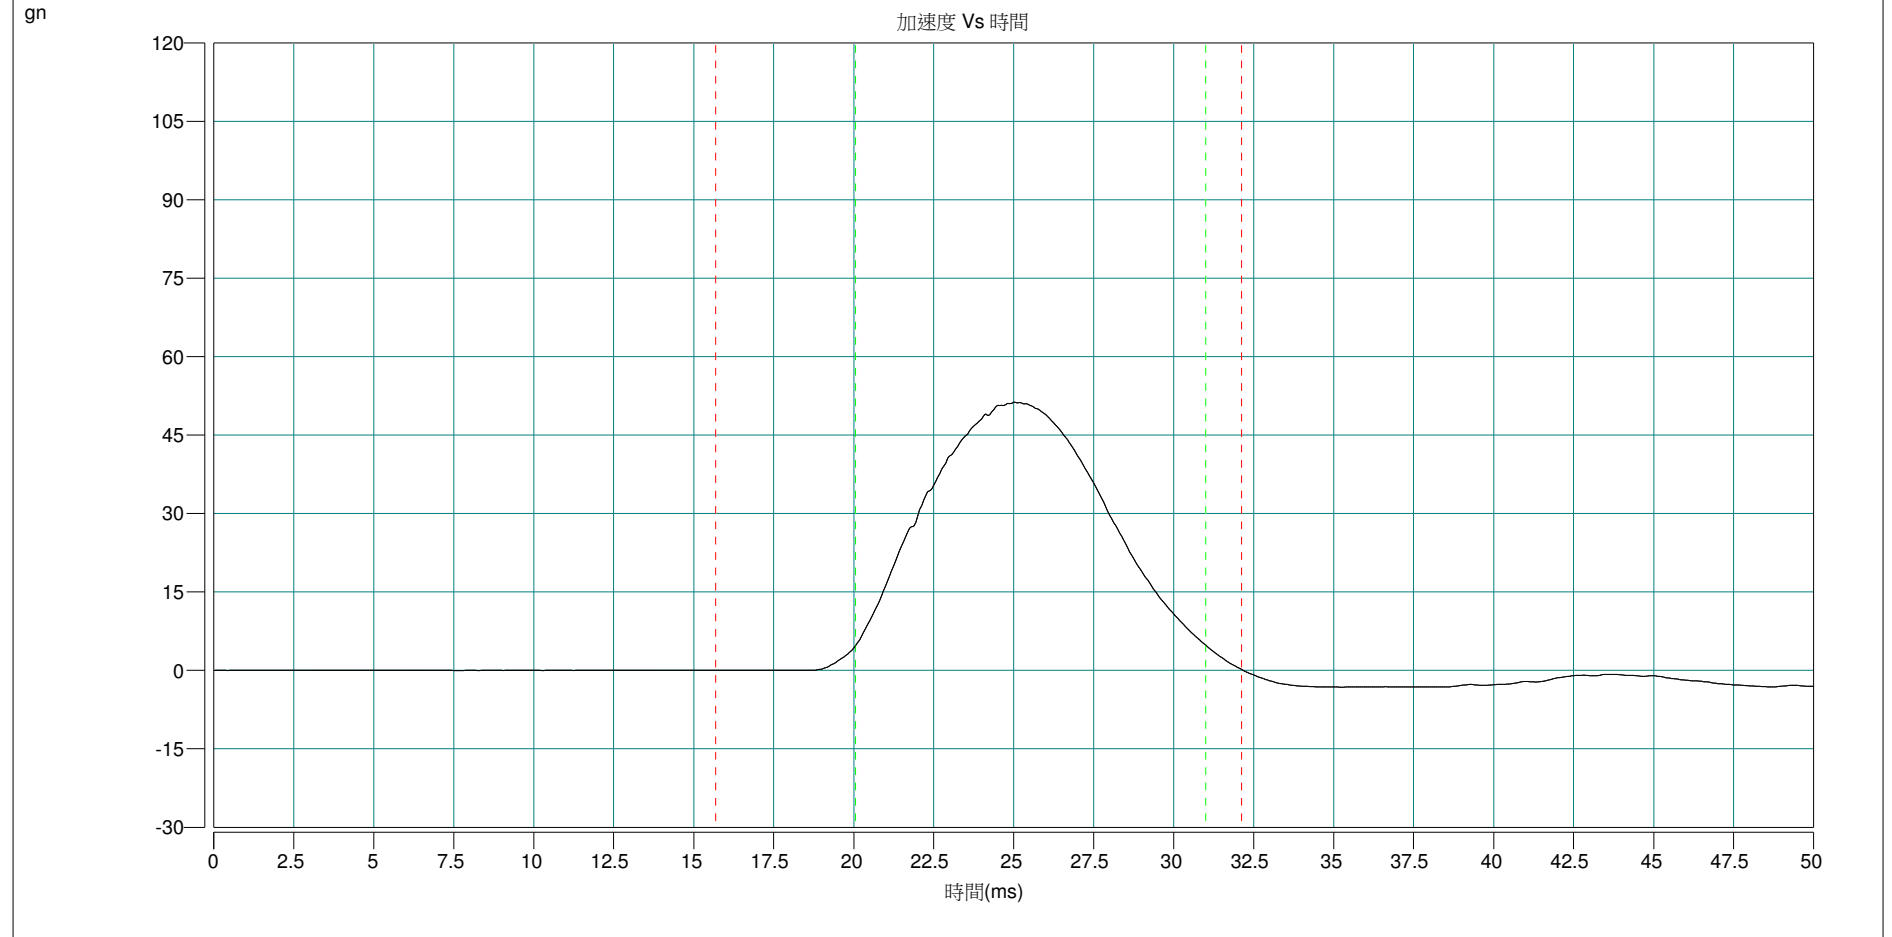


-X axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	50.90	10.65	3.36	500.00	50.90	-4.26

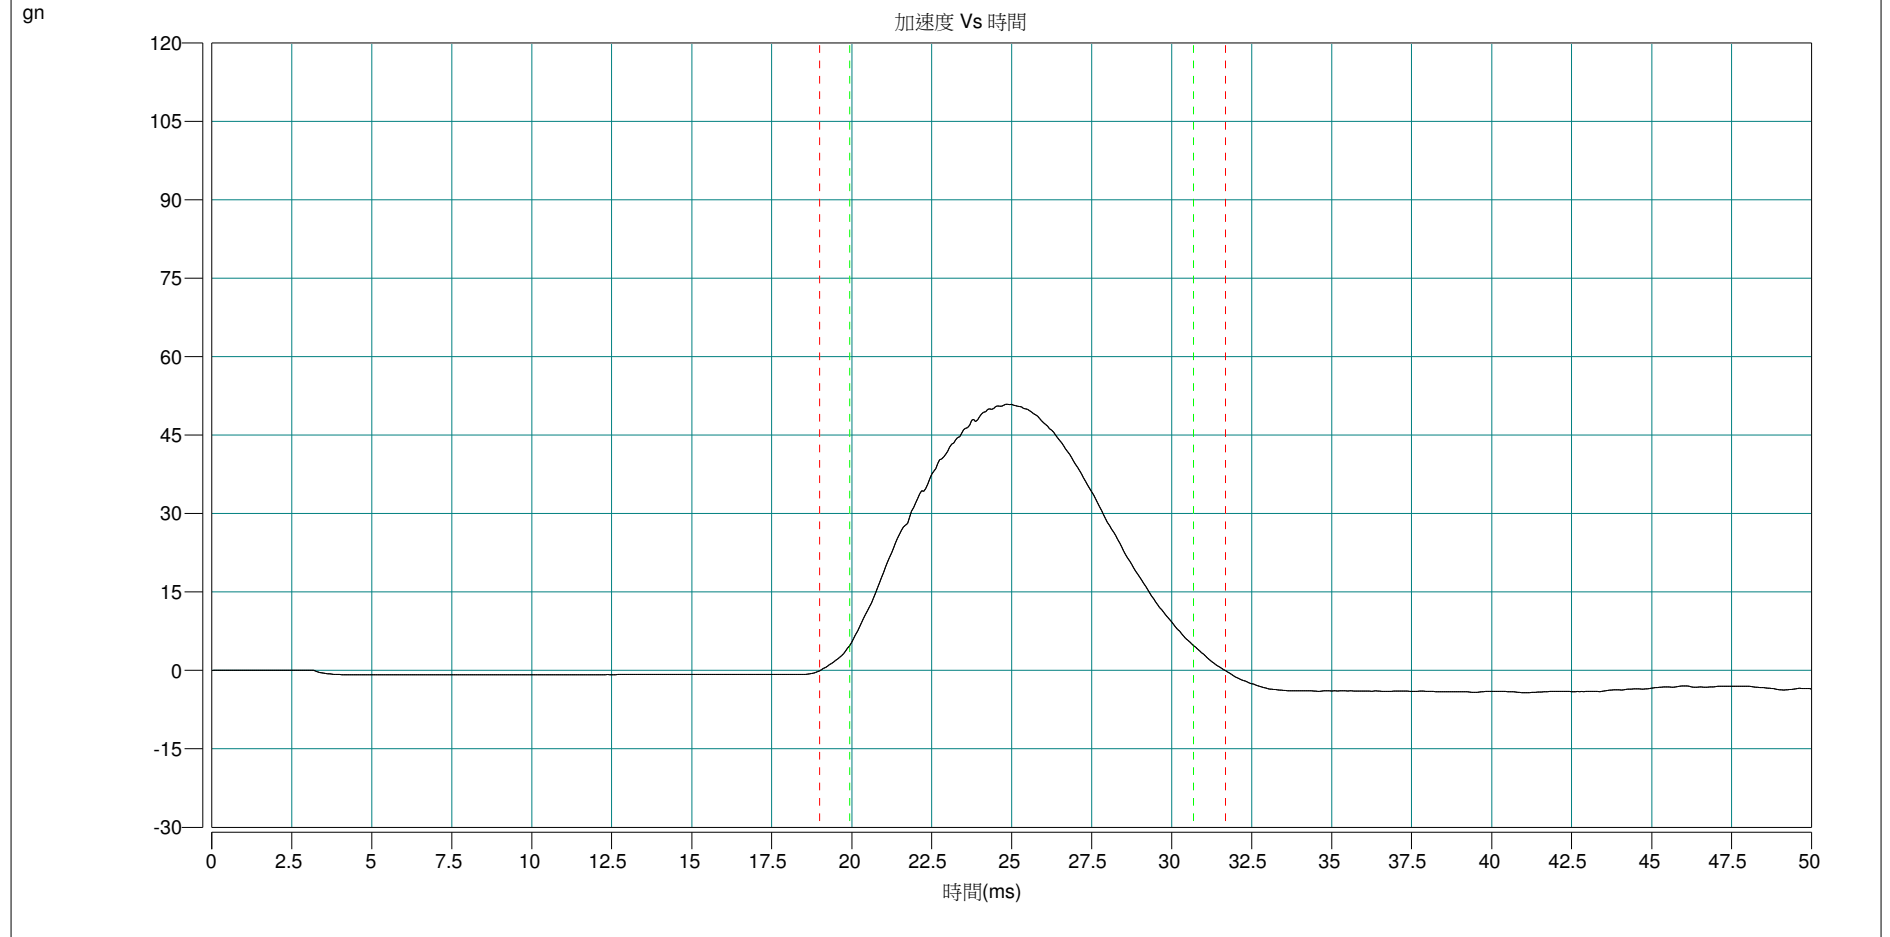


+Y axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.36	10.96	3.41	500.00	51.36	-3.28

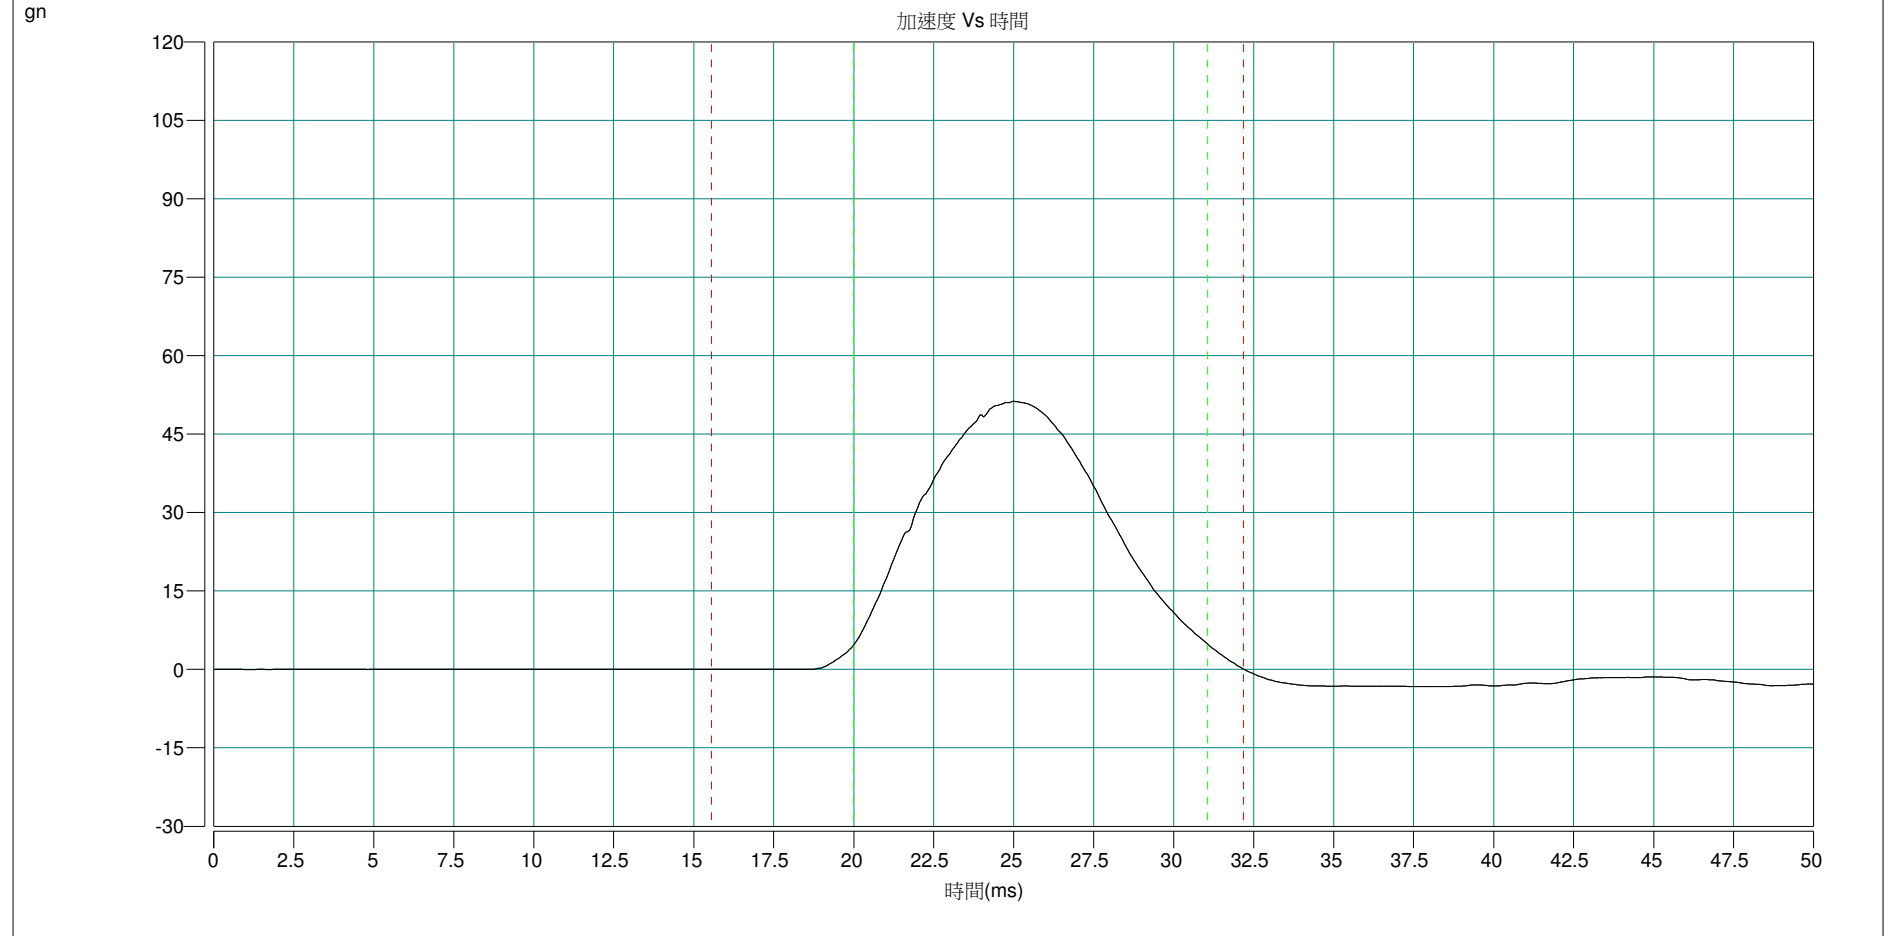


-Y axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.24	10.95	3.40	500.00	51.24	-3.25

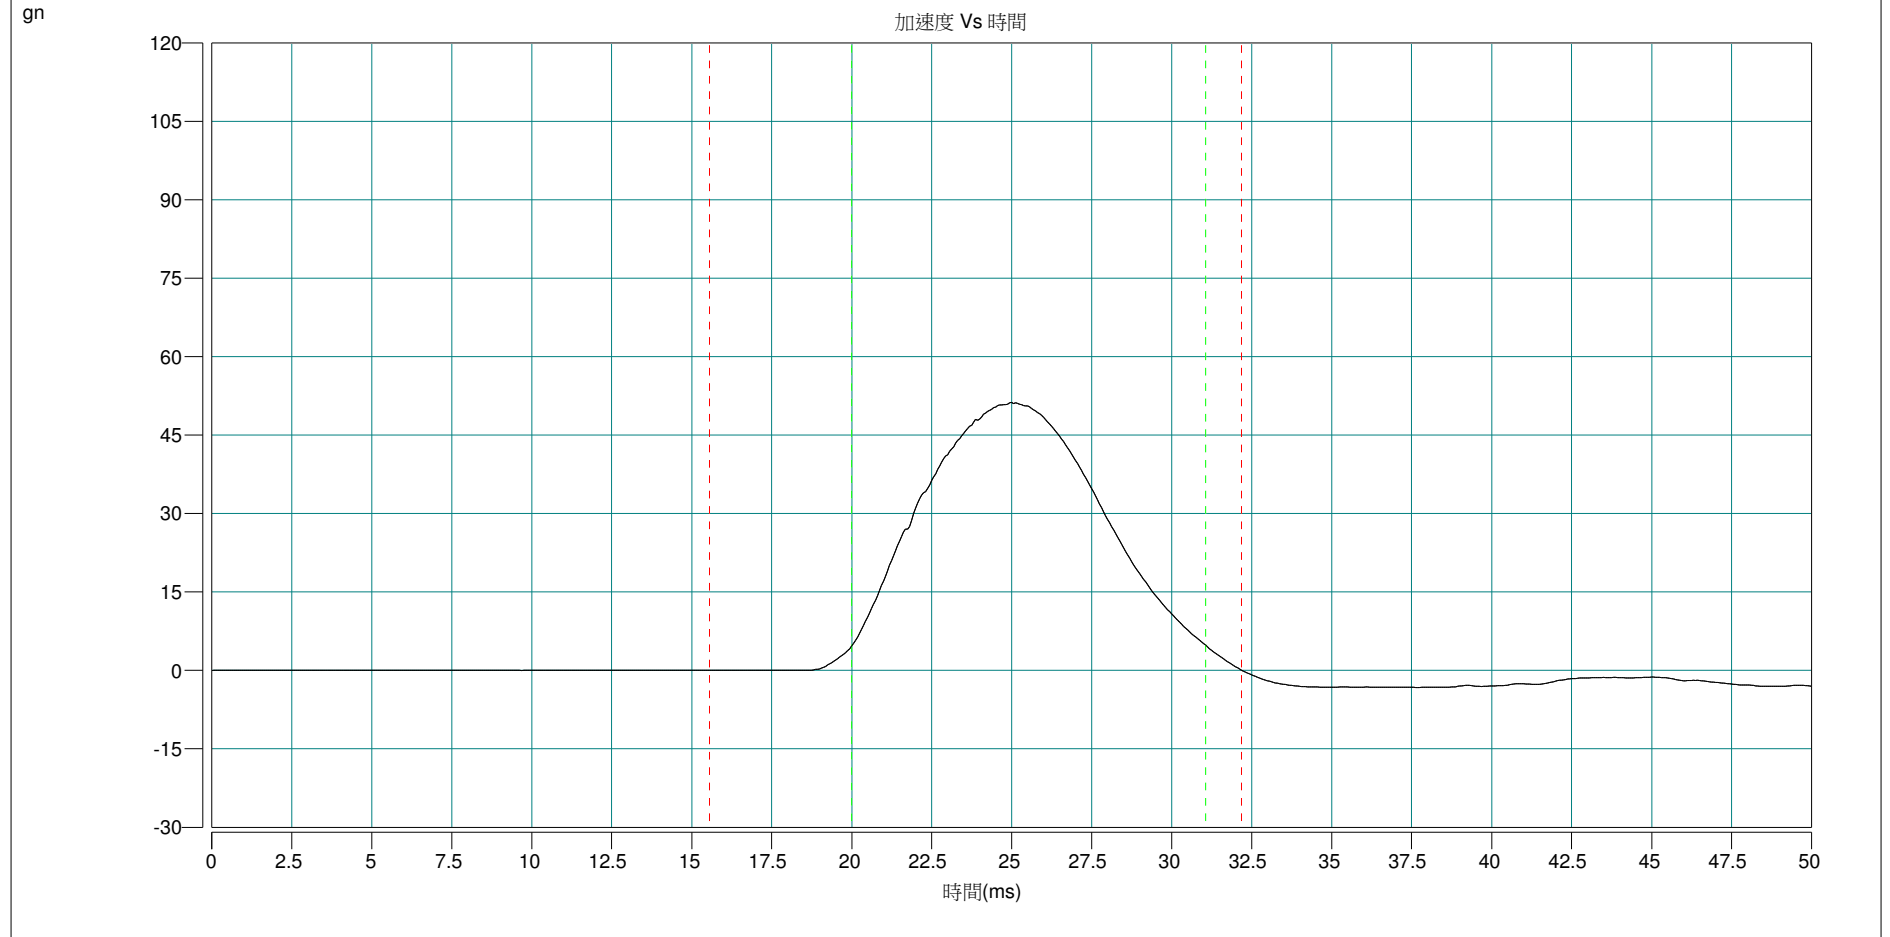


+Z axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	51.22	10.88	3.39	500.00	51.22	-3.18

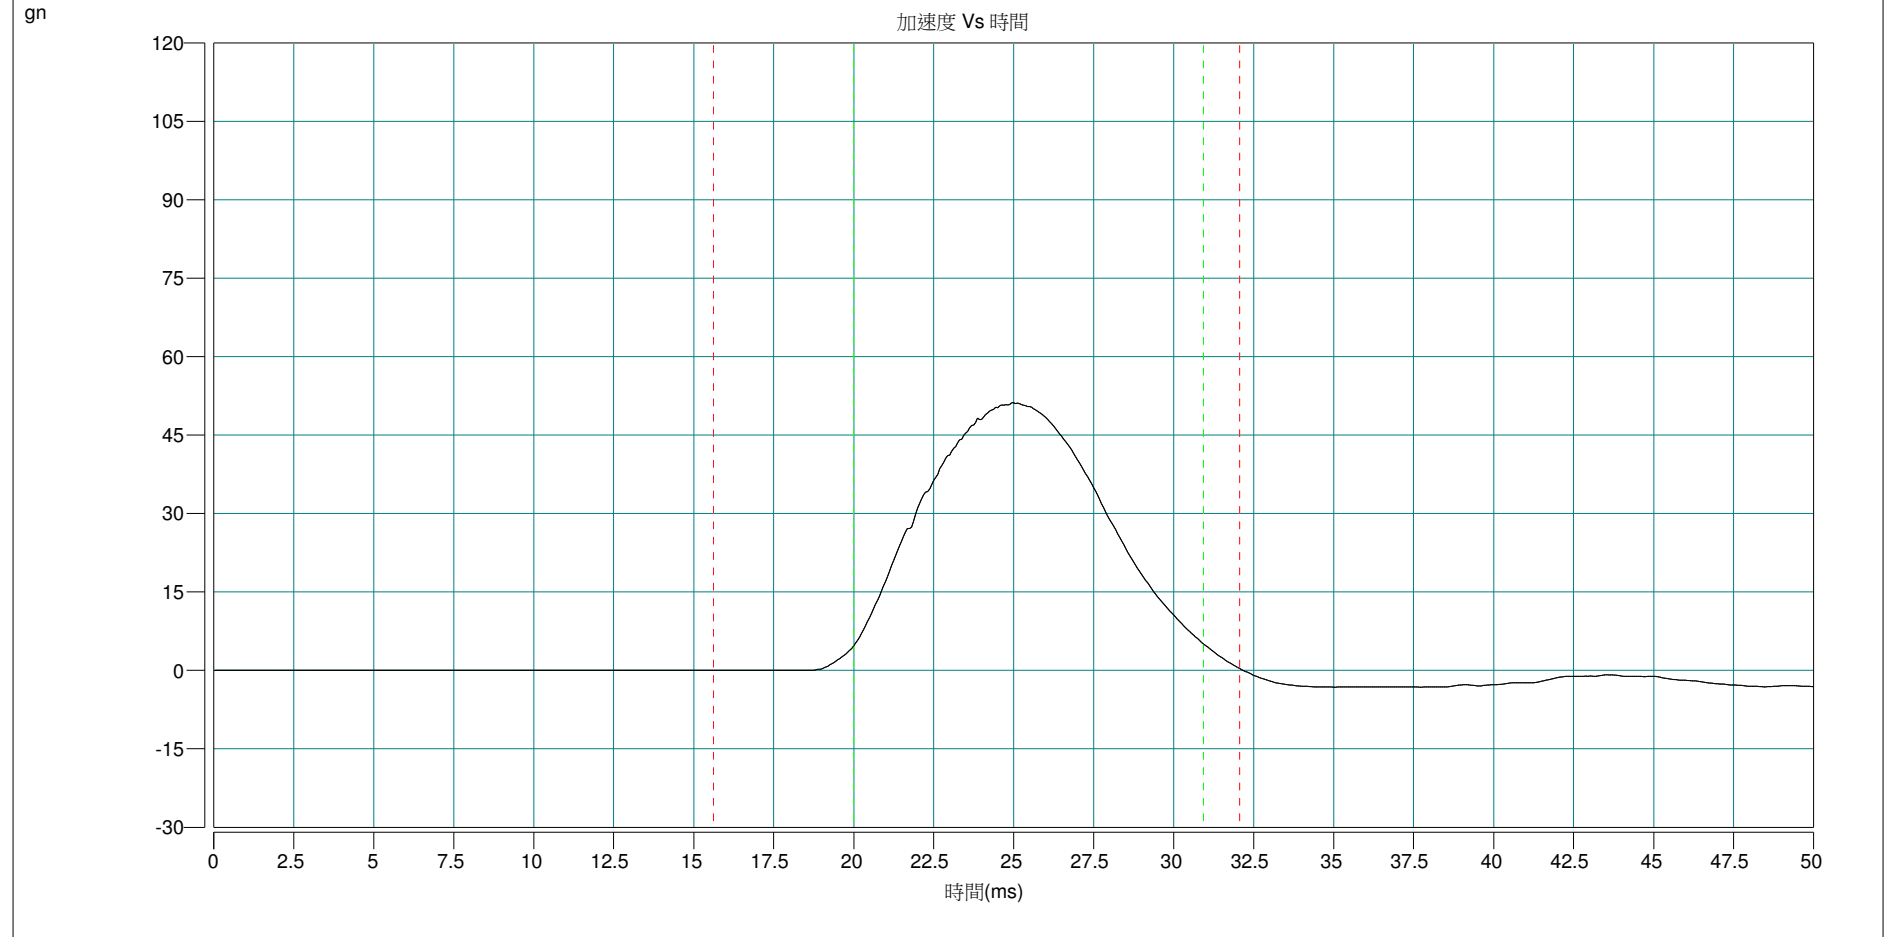

-Z axis

Signal	Acceleration (gn)	Duration (ms)	Velocity (In/s)	Filter (Hz)	Max Acc (gn)	Min Acc (gn)
Input1(t)	50.86	10.82	3.34	500.00	50.86	-3.77

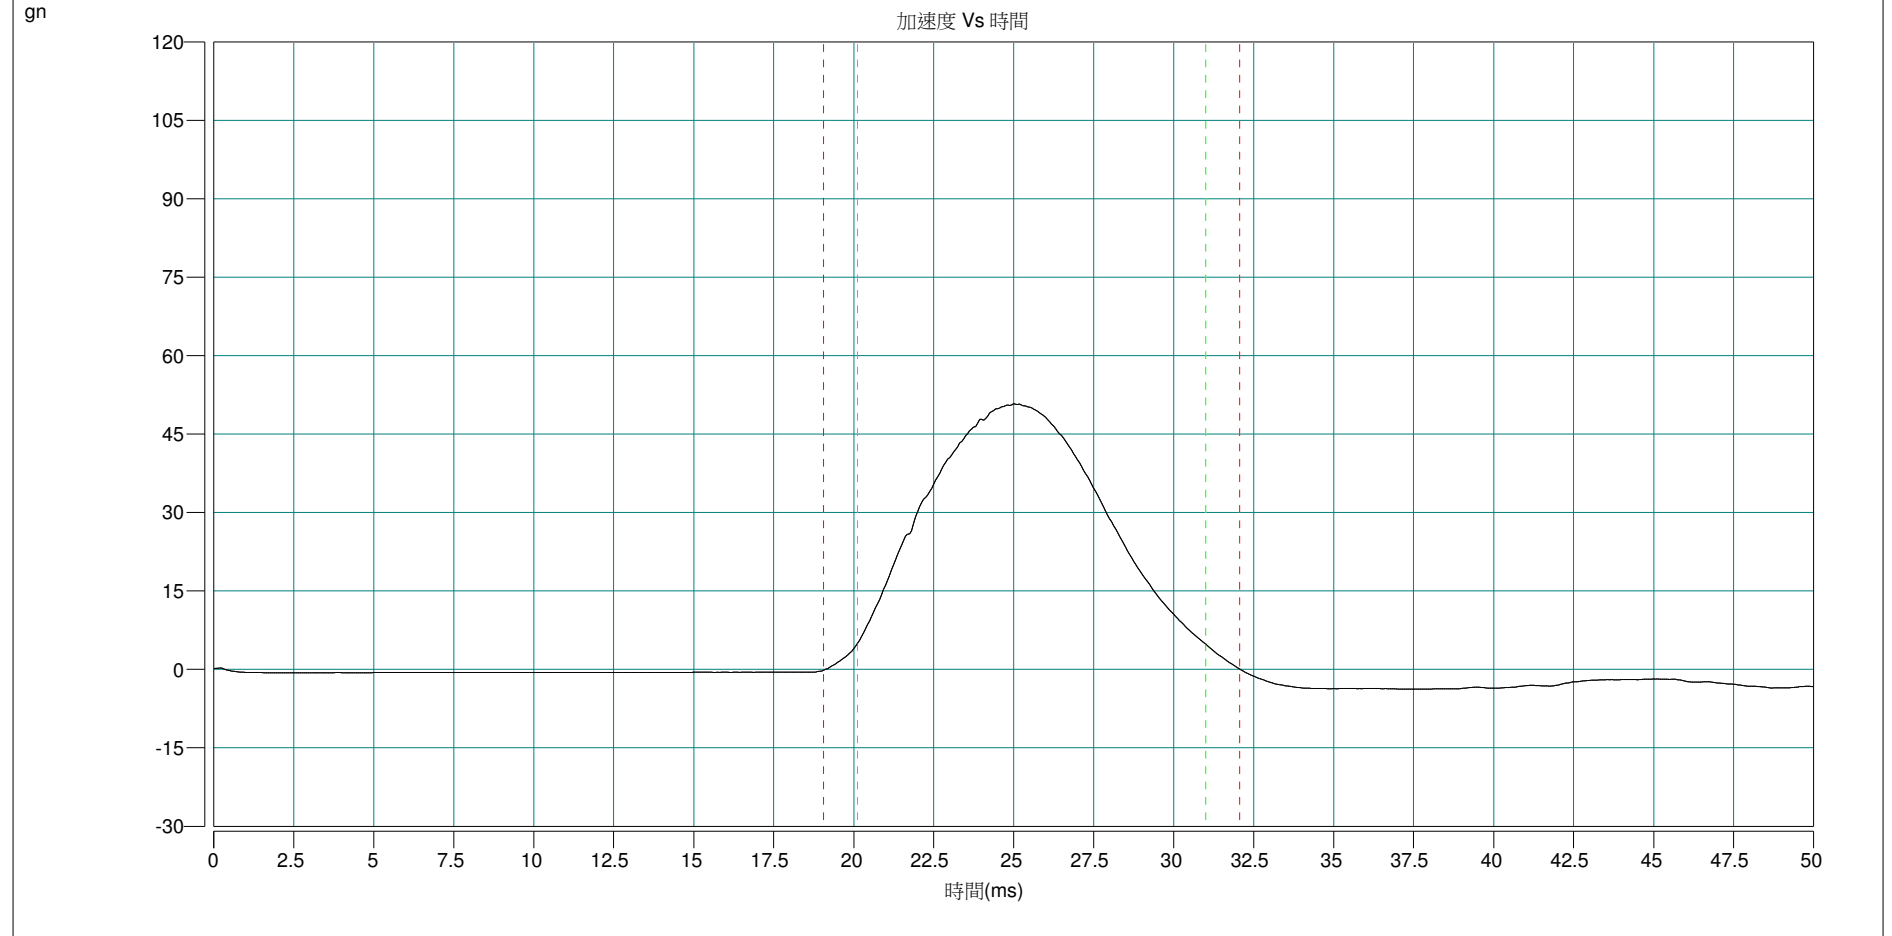

**-END-**