

# Certificate

Issue Date: December 26, 2014  
Ref. Report No. ISL-14LE536FB

Product Name : HalfSlim SSD  
Model(s) : SFD18SH/-M/-MK  
Brand : Apacer  
Applicant : Apacer Technology Inc.  
Address : 1F., No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City 236, Taiwan ,  
R.O.C.

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (refer to Test Report if any modifications were made for compliance).

## Standards:




FCC CFR Title 47 Part 15 Subpart B: 2012- Section 15.107 and 15.109  
ANSI C63.4-2009  
Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 5: 2012

## Class B

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## International Standards Laboratory

  
Jim Chu / Director

**Hsi-Chih LAB:**  
No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,  
New Taipei City 221, Taiwan  
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



**Lung-Tan LAB:**  
No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.,  
Lung-Tan Hsiang, Tao Yuan County 325, Taiwan  
Tel: 886-3-407-1718; Fax: 886-3407-1738



## Declaration of Conformity

This device complies with Part 15 of the FCC Rules. The test result has been shown in the ISL test report with number ISL-14LE536FB. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Product Name:	HalfSlim SSD
Model(s):	SFD18SH/-M/-MK
Brand:	Apacer
Name of Responsible Party:	Apacer Technology Inc.
Address of Responsible Party:	1F., No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City 236, Taiwan , R.O.C.
Contact Person:	Sheng-Wei Yu
Phone No.:	886-2-2267-8000
Fax No.:	886-2-2267-2261

*We, Apacer Technology Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable FCC Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the Commissions requirements.*

-----  
Sheng-Wei Yu  
Apacer Technology Inc.

**Issue Date: December 26, 2014**

# FCC TEST REPORT

of

## CFR 47 Part 15 Subpart B Class B

Application Type: Declaration of Conformity

Product : **HalfSlim SSD**

Model(s): **SFD18SH/-M/-MK**

Brand: **Apacer**

Applicant: **Apacer Technology Inc.**

Address: **1F., No.32, Zhongcheng Rd., Tucheng Dist.,  
New Taipei City 236, Taiwan , R.O.C.**

Test Performed by:

**International Standards Laboratory**

<Lung-Tan LAB>

\*Site Registration No.

BSMI: SL2-IN-E-0013; SL2-R1/R2-E-0013; TAF: 0997

FCC: TW1036; IC: IC4067B-1; NEMKO: ELA 113B

VCCI: <Conduction 02>C-1440, T-1676, <Conduction 03>C-2845,  
T-1464, <Chamber 02>R-1435, G-17, <Chamber 12>R-2598,G-16,  
<Chamber 14>G-211,

\*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

\*Tel: 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-14LE536FB**

Issue Date : **December 26, 2014**

This report totally contains 26 pages including this cover page and contents page.

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report must not be used to claim product endorsement by NVLAP, NIST or any other Government agency.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

## Contents of Report

1.	General .....	1
1.1	Certification of Accuracy of Test Data .....	1
1.2	Description of EUT .....	2
1.3	Description of Support Equipment .....	3
1.4	Software for Controlling Support Unit.....	4
1.5	I/O Cable Condition of EUT and Support Units .....	5
2.	Powerline Conducted Emissions .....	6
2.1	Test Setup and Procedure .....	6
2.1.1	Test Setup .....	6
2.1.2	Test Procedure .....	6
2.1.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	6
2.2	Conduction Test Data: Configuration 1 .....	7
2.3	Test Setup Photo.....	9
3.	Radiated Emissions .....	11
3.1	Test Setup and Procedure .....	11
3.1.1	Test Setup .....	11
3.1.2	Test Procedure .....	12
3.1.3	Spectrum Analyzer Configuration (for the frequencies tested) .....	12
3.2	Radiation Test Data: Configuration 1.....	13
3.3	Test Setup Photo.....	17
4.	Appendix .....	19
4.1	Appendix A: Warning Labels.....	19
4.2	Appendix B: Warning Statement.....	20
4.3	Appendix C: Test Equipment .....	21
4.3.1	Test Equipment List.....	21
4.3.2	Software for Controlling Spectrum/Receiver and Calculating Test Data.....	21
4.4	Appendix D: Uncertainty of Measurement .....	22
4.5	Appendix E: Photographs of EUT Please refer to the File of ISL-14LE536P.....	23

# 1. General

## 1.1 Certification of Accuracy of Test Data

**Standards:** FCC CFR Title 47 Part 15 Subpart B: 2012- Section 15.107 and 15.109  
ANSI C63.4-2009  
Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 5: 2012

**Equipment Tested:** HalfSlim SSD

**Model:** SFD18SH/-M/-MK

**Brand:** Apacer

**Applicant:** Apacer Technology Inc.

**Sample received Date:** December 15, 2014

**Final test Date:** refer to the date of test data

**Test Site:** International Standards Laboratory  
Chamber 12; Chamber 14; Conduction 03

**Test Distance:** 10M; 3M (above1GHz)

**Temperature:** refer to each site test data

**Humidity:** refer to each site test data

**Input power:** Conduction input power: AC 120 V / 60 Hz  
Radiation input power: AC 120 V / 60 Hz

**Test Result:** PASS

**Report Engineer:** Cheryl Tung

**Test Engineer:**

*Lawrence Wang*  
Lawrence Wang

**Approved By:**

*Jim Chu*  
-----  
Jim Chu / Director

## 1.2 Description of EUT

### EUT

Description: HalfSlim SSD  
 Condition: Pre-Production  
 Model: SFD18SH/-M/-MK  
 Memory Capacity: 1GB~256GB  
 Serial Number: N/A  
 Control IC: SRP40CB0; SRP40EB0  
 PCBA Number: FSD0DF14OCZ1-MN  
 Highest working frequency: 6GHz  
 The radiation test should be tested till 30GHz

The memory capacities listed below are chosen by the applicant to be the representative configuration for testing in this report.

#### Test configurations:

Configuration	Control IC	Memory Capacity
1	SRP40CB0	256GB

#### Control IC difference:

Model	Memory Capacity	Control IC	Different
SFD18SH/-M/-MK	1GB~256GB	SRP40CB0; SRP40EB0	Different Market

#### EMI Noise Source:

Refer to the photo	Crystal	Point
EUT-5	30MHz	Y1

#### EMI Solution:

N/A

### 1.3 Description of Support Equipment

No	Unit	Model / Serial No.	Brand	Power Cord	FCC ID
1	Personal Computer	A13 S/N: PBYXED3	Lenovo	Non-shielded	FCC DOC
2	PS/2 Keyboard	Y-S0002 S/N: N/A	Logitech	N/A	FCC DOC
3	PS/2 Mouse	M-SBM96B S/N: NA	Logitech	Non-shielded	FCC DOC
4	HP Printer	C930 S/N: N/A	HP	Non-shielded	FCC DOC
5	Aceex Modem	DM1414 S/N: N/A	Aceex	Non-shielded	FCC DOC
6	24" LCD Monitor	ST2420L S/N:N/A	DELL	Non-shielded	FCC DOC

## -4- Declaration of Conformity

### 1.4 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

1. PC running EMCTEST to read and write the EUT.
2. Send signal to the Printer through PC Parallel Port.
3. Send signal to the Modem through PC Serial Port.
4. Send H pattern to the 24" LCD Monitor through PC D-SUB Port.
5. Repeat the above steps.

	<b>Filename</b>	<b>Issued Date</b>
EUT	EMCTEST	04/11/2007
Printer	EMCTEST	04/11/2007
Modem	EMCTEST	04/11/2007
Monitor	EMCTEST	04/11/2007

**1.5 I/O Cable Condition of EUT and Support Units**


<b>Description</b>	<b>Path</b>	<b>Cable Length</b>	<b>Cable Type</b>
AC Power Cable	100V (~240V) to PC SPS	1.8m	Non-shielded
PS/2 Keyboard Data Cable	PS/2 Keyboard to PC PS/2 Keyboard Port	1.8m	Shielded
USB Mouse Data Cable	USB Mouse to PC USB 2.0 Port	1.8m	Shielded
Printer Data Cable	Printer to PC Parallel Port	1.8m	Shielded
Modem Data Cable	Modem to PC Serial Port	1.8m	Shielded
Monitor Data Cable	Monitor D-SUB Port to PC D-SUB Port	1.8m	Shielded (with core)



## -7- Declaration of Conformity

### 2.2 Conduction Test Data: Configuration 1

**Table 2.2.1 Power Line Conducted Emissions (Line)**

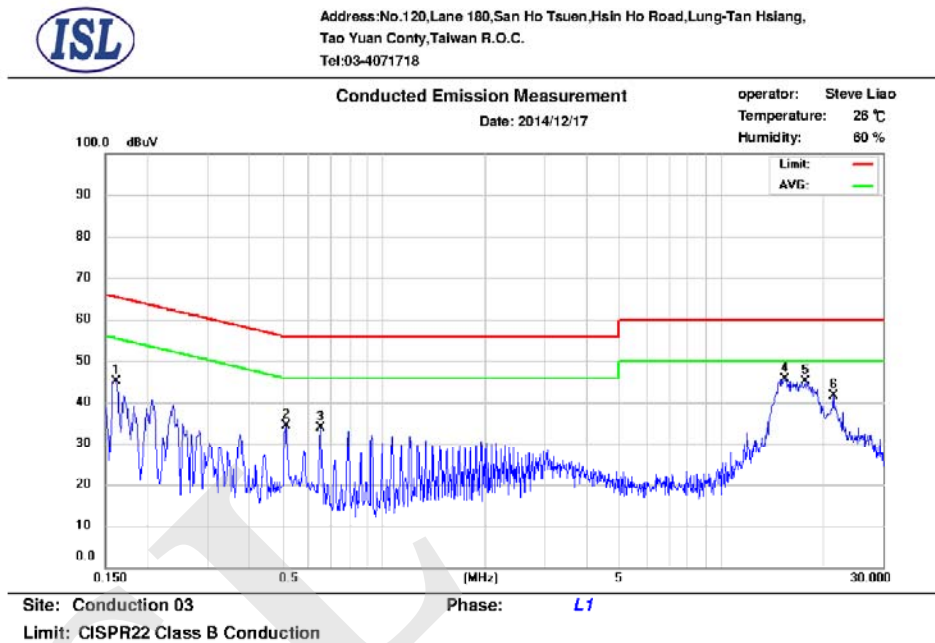

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.162	9.65	37.80	65.36	-27.56	20.41	55.36	-34.95	
2	0.514	9.68	32.39	56.00	-23.61	30.67	46.00	-15.33	
3	0.650	9.68	32.69	56.00	-23.31	31.84	46.00	-14.16	
4	15.402	10.00	39.81	60.00	-20.19	29.67	50.00	-20.33	
5	17.754	10.03	39.34	60.00	-20.66	31.58	50.00	-18.42	
6	21.374	10.08	34.52	60.00	-25.48	27.83	50.00	-22.17	

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


**The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.**

**If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.**

The CISPR 22 limits would be applied to all FCC Part 15 devices.

-8- Declaration of Conformity

Table 2.2.2 Power Line Conducted Emissions (Neutral)

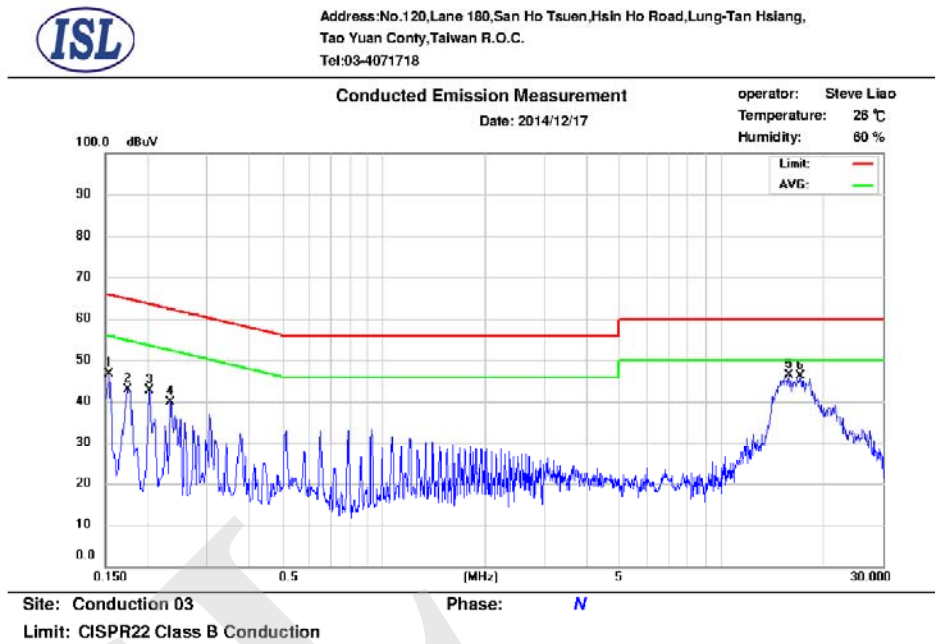

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.154	9.65	38.35	65.78	-27.43	19.17	55.78	-36.61	
2	0.174	9.65	41.68	64.77	-23.09	34.71	54.77	-20.06	
3	0.202	9.65	34.61	63.53	-28.92	22.18	53.53	-31.35	
4	0.234	9.65	31.79	62.31	-30.52	26.37	52.31	-25.94	
5	15.802	10.03	38.64	60.00	-21.36	27.50	50.00	-22.50	
6	17.154	10.05	39.27	60.00	-20.73	30.33	50.00	-19.67	

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

**2.3 Test Setup Photo**

Front View



**-10- Declaration of Conformity**



Back View



### 3. Radiated Emissions

#### 3.1 Test Setup and Procedure

##### 3.1.1 Test Setup

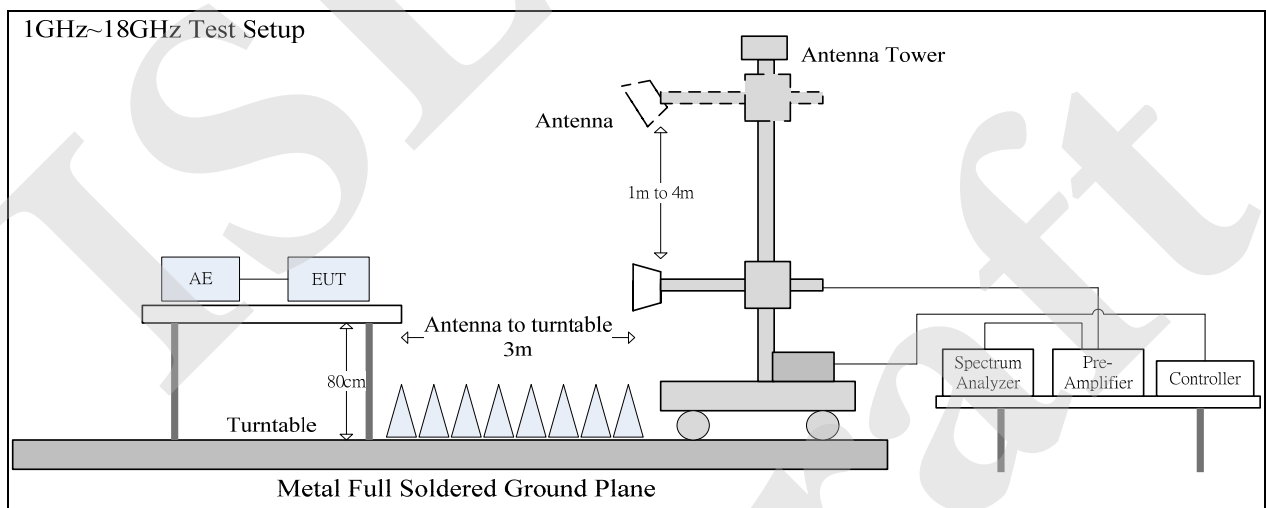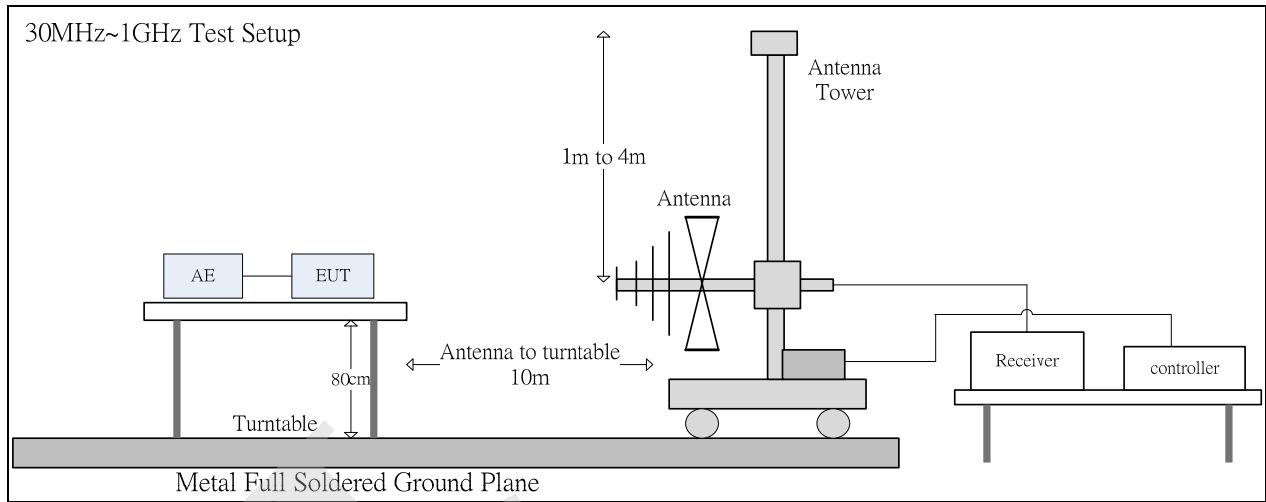

### 3.1.2 Test Procedure

The radiated emissions test will then be repeated on the open site or chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 10 meter open field sites or 10 meter chamber. Desktop EUT are set up on a wooden stand 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane. The test volume for a height of up to 30 cm may be obstructed by absorber placed on the ground plane.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The highest emissions between 1 GHz to 40 GHz were analyzed in details by operating the spectrum analyzer in peak and average mode to determine the precise amplitude of the emissions.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the cone of radiation from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings. All of the interface cables were manipulated according to ANSI C63.4 requirements.

The highest internal source of the EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes. If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.


### 3.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 30MHz--1000MHz  
Detector Function: Quasi-Peak Mode  
Resolution Bandwidth: 120KHz

Frequency Range: Above 1000MHz  
Detector Function: Peak/Average Mode  
Resolution Bandwidth: 1MHz

### 3.2 Radiation Test Data: Configuration 1

Table 3.2.1 Radiated Emissions (Horizontal)

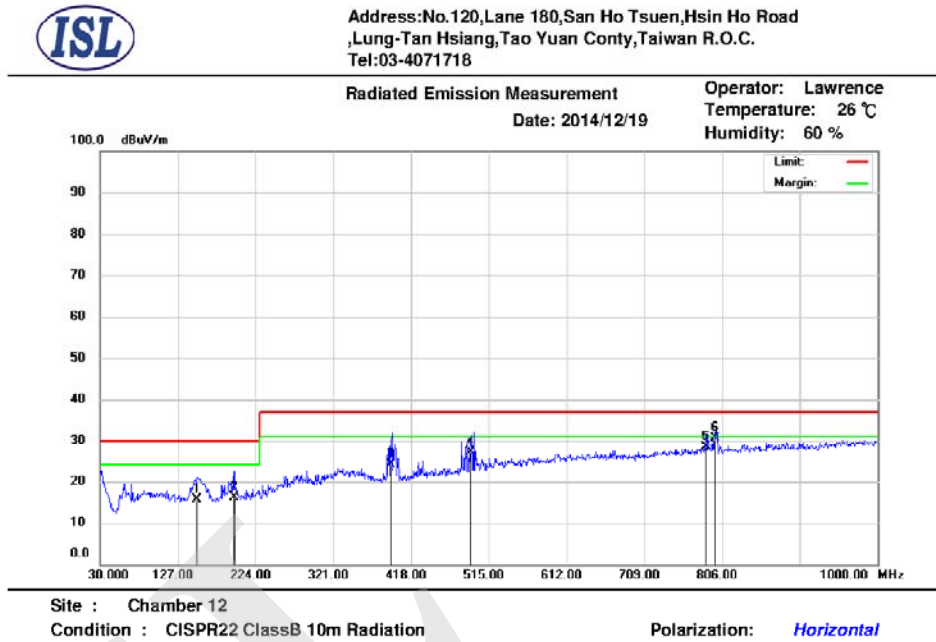

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	151.81	3.33	12.25	15.58	30.00	-14.42	267	337	QP
2	197.28	4.63	11.50	16.13	30.00	-13.87	399	287	QP
3	392.76	5.05	19.12	24.17	37.00	-12.83	399	112	QP
4	491.17	5.79	21.30	27.09	37.00	-9.91	187	237	QP
5	786.14	3.28	25.05	28.33	37.00	-8.67	100	58	QP
6	796.61	5.56	25.12	30.68	37.00	-6.32	100	149	QP

\* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meters

The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.


## -14- Declaration of Conformity



Address: No. 120, Lane 180, San Ho Tsuen, Hsin Ho Road  
Lung-Tan Hsiang, Tao Yuan Conty, Taiwan R.O.C.  
Tel: 03-4071718

Radiated Emission Measurement  
Date: 2014/12/20

Operator: Jerry  
Temperature: 26 °C  
Humidity: 60 %

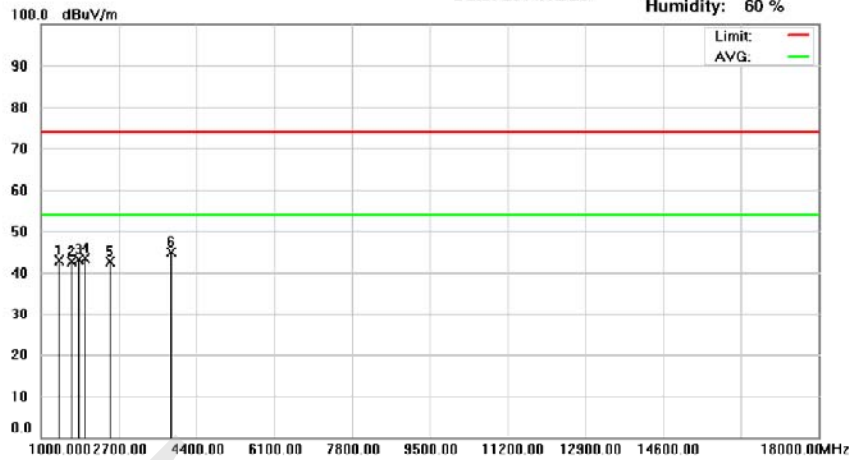

Site : Chamber 14

Condition : FCC Class B Radiation(Peak)

Polarization: *Horizontal*

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1391.00	58.70	-15.92	42.78	74.00	-31.22	100	64	peak
2	1663.00	57.22	-14.49	42.73	74.00	-31.27	362	163	peak
3	1816.00	56.27	-13.25	43.02	74.00	-30.96	285	359	peak
4	1969.00	55.39	-12.02	43.37	74.00	-30.63	189	121	peak
5	2496.00	53.75	-11.09	42.66	74.00	-31.34	294	229	peak
6	3839.00	54.26	-9.34	44.92	74.00	-29.08	343	239	peak

\* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


Horn Antenna Distance: 3 meters

**The CISPR 22 limits would be applied to all FCC Part 15 devices.**

**Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.**

-15- Declaration of Conformity

Table 3.2.2 Radiated Emissions (Vertical)

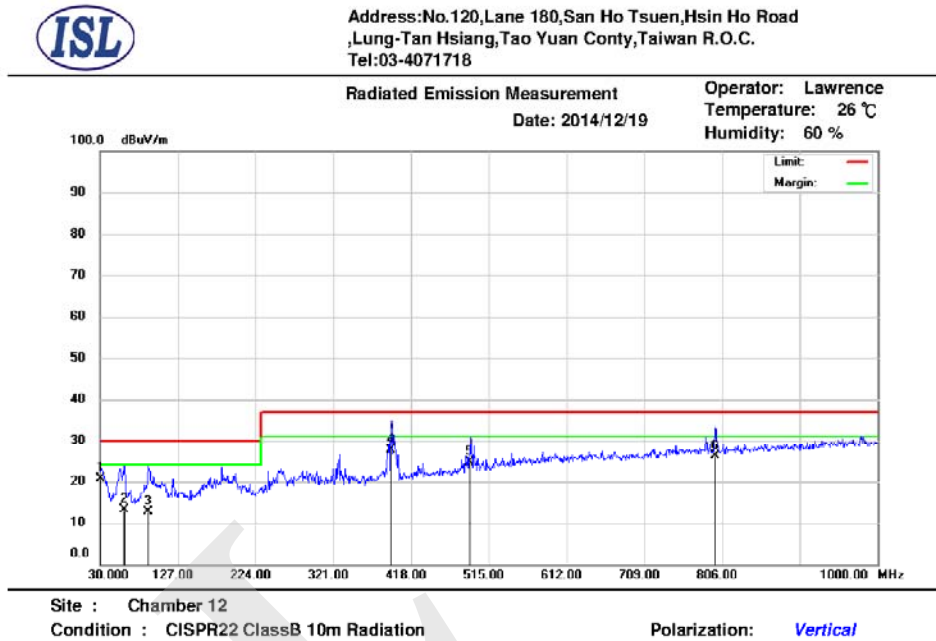

Mk.	Frequency (MHz)	RX R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	30.14	0.85	19.68	20.53	30.00	-9.47	100	0	QP
2	60.52	5.23	7.66	13.11	30.00	-16.89	100	170	QP
3	90.23	2.07	10.60	12.67	30.00	-17.33	100	349	QP
4	393.00	8.54	19.12	27.66	37.00	-9.34	310	189	QP
5	491.21	3.25	21.30	24.55	37.00	-12.45	161	0	QP
6	796.70	1.00	25.12	26.12	37.00	-10.88	223	194	QP

\* Note:

Margin = Emission - Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meters

The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

-16- Declaration of Conformity



Address: No.120, Lane 180, San Ho Tsuen, Hsin Ho Road  
, Lung-Tan Hsiang, Tao Yuan Conty, Taiwan R.O.C.  
Tel: 03-4071718


Radiated Emission Measurement

Date: 2014/12/20

Operator: Jerry

Temperature: 26 °C

Humidity: 60 %

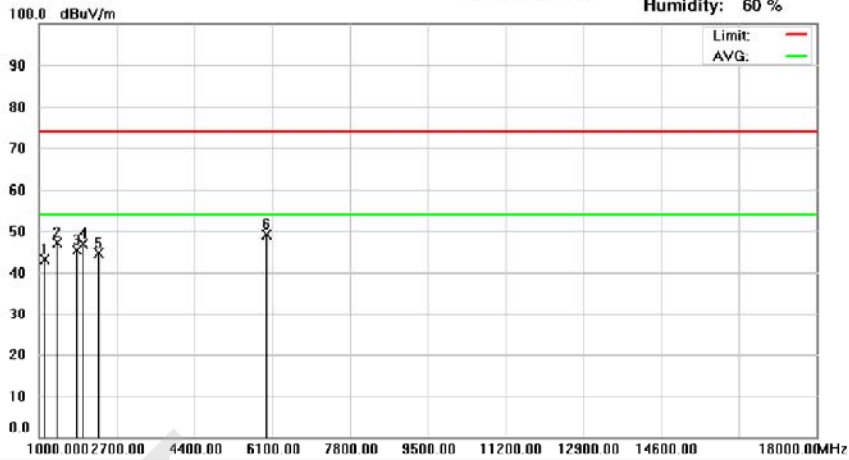

Site : Chamber 14

Condition : FCC Class B Radiation(Peak)

Polarization: Vertical

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1119.00	59.42	-16.23	43.19	74.00	-30.81	393	31	peak
2	1391.00	63.07	-15.92	47.15	74.00	-26.85	140	121	peak
3	1816.00	58.64	-13.25	45.39	74.00	-28.61	100	292	peak
4	1969.00	58.94	-12.02	46.92	74.00	-27.08	100	42	peak
5	2292.00	55.94	-11.37	44.57	74.00	-29.43	100	355	peak
6	5981.00	56.43	-7.35	49.08	74.00	-24.92	277	267	peak

\* Note:

Margin = Emission - Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Horn Antenna Distance: 3 meters

The CISPR 22 limits would be applied to all FCC Part 15 devices.


Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

**3.3 Test Setup Photo**

Front View (below 1GHz)



Back View (below 1GHz)

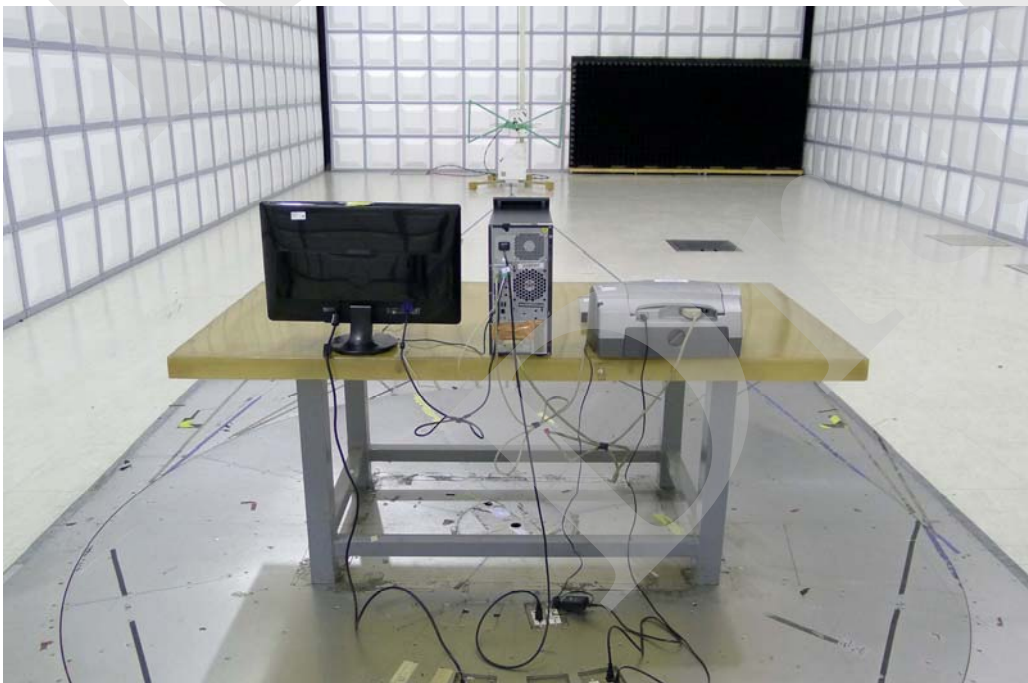


**-18- Declaration of Conformity**

Front View (above 1GHz)



Back View (above 1GHz)

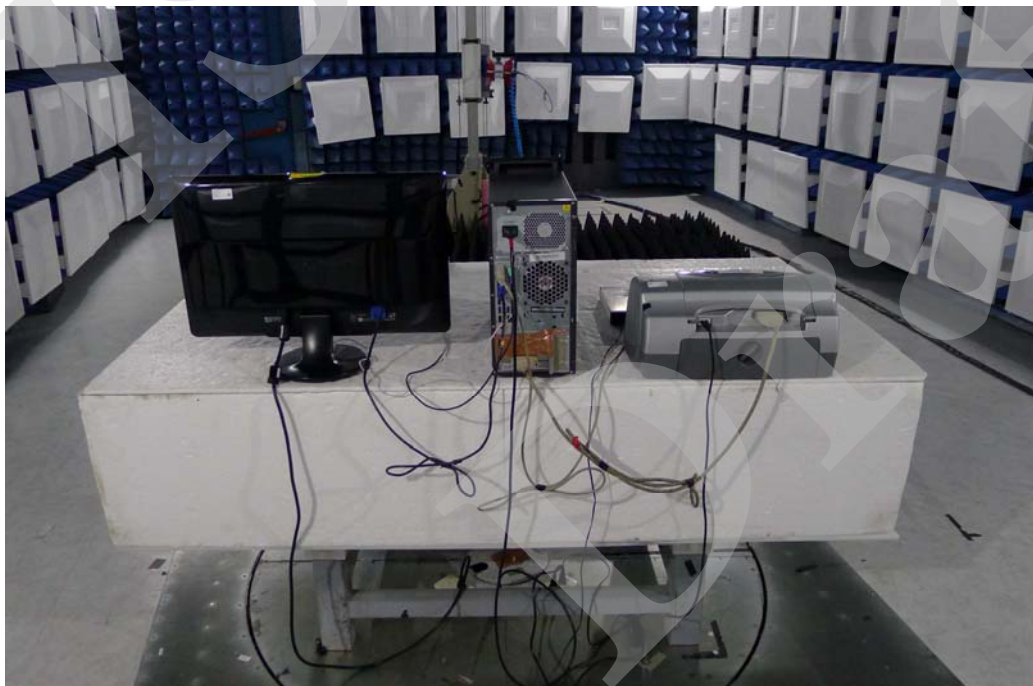

## 4. Appendix

### 4.1 Appendix A: Warning Labels


#### Label Requirements

A Class B digital device subject to Declaration of Conformity of FCC shall carry a label which includes the following statement:

**\*\*\* WARNING \*\*\***

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The sample label shown shall be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

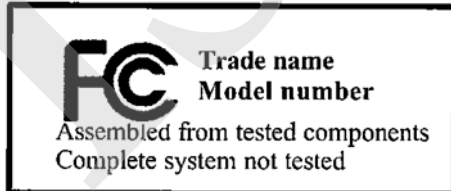

## 4.2 Appendix B: Warning Statement

### Statement Requirements

The operators' manual for a Class B digital device shall contain the following statements or their equivalent:

**\* \* \* W A R N I N G \* \* \***

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio TV technician for help.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equivalent.

\* \* \* \* \*

If the EUT was tested with special shielded cables the operators manual for such product shall also contain the following statements or their equivalent:

Shielded interface cables and/or AC power cord, if any, must be used in order to comply with the emission limits.

### 4.3 Appendix C: Test Equipment

#### 4.3.1 Test Equipment List

Location Con03	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction 03	EMI Receiver 11	ROHDE & SCHWARZ	ESCI	100568	07/19/2014	07/19/2015
Conduction 03	LISN 20	R&S	ENV216	101477	06/06/2014	06/06/2015
Conduction 03	LISN 08	ROHDE&SCHW ARZ	FCC-LISN-50/ 250-25/2/01	07039	03/11/2014	03/11/2015
Conduction 03	Conduction 03 -1 Cable	WOKEN	CFD 300-NL	Conduction 03 -1	07/11/2014	07/11/2015

Location Chmb12	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Radiation (Chamber12)	BILOG Antenna 04	Schaffner	CBL6112B	2764	02/18/2014	02/18/2015
Radiation (Chamber12)	Coaxial Cable Chmb 12-10M-01	PEWC	CFD400-NL	Chmb 12-10M-01	07/11/2014	07/11/2015
Radiation (Chamber12)	EMI Receiver 10	ROHDE & SCHWARZ	ESCI	100567	07/25/2014	07/25/2015

Location Chmb14	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. Above 1GHz	Spectrum Analyzer 24 (1G~26.5GHz)	Agilent	N9010A	MY49060537	07/29/2014	07/29/2015
Rad. Above 1GHz	Horn Antenna 06 (1G~18G)	ETS	3117	00066665	11/27/2014	11/27/2015
Rad. Above 1GHz	Preamplifier 13	MITEQ	JS44-00101800- 25-10P-44	1329256	07/30/2014	07/30/2015
Rad. Above 1GHz	Microwave Cable 22 (1G~18G)	HUBER SUHNER	SUCOFLEX 106	501360/6 and 501361/6	02/17/2014	02/17/2015

#### 4.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data

Site	Filename	Version	Issue Date
Conduction/Radiation	EZ EMC	ISL-03A2	3/6/2013

#### 4.4 Appendix D: Uncertainty of Measurement

The measurement uncertainty refers to CISPR 16-4-2:2011. The coverage factor  $k = 2$  yields approximately a 95 % level of confidence.

<Conduction 03>  
AMN:  $\pm 3.28\text{dB}$

<Chamber 12 (10M)>  
Horizontal  
30MHz~200MHz:  $\pm 3.36\text{dB}$   
200MHz~1000MHz:  $\pm 3.93\text{dB}$   
Vertical  
30MHz~200MHz:  $\pm 4.51\text{dB}$   
200MHz~1000MHz:  $\pm 4.02\text{dB}$

<Chamber 14 (3M)>  
1GHz~18GHz:  $\pm 4.70\text{dB}$

#### 4.5 Appendix E: Photographs of EUT

Please refer to the File of **ISL-14LE536P**

ISL  
Draft