

KING DESIGN INDUSTRIAL CO., LTD.

4F, NO. 3, Lane 270, Pei Shen Road Sec. 3,

Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C

TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

VIBRATION TEST LABORATORY

<http://www.kdi.tw><http://www.vibration.com.tw>E-mail: [service@kdi.tw](mailto:service@kdi.tw)

## TESTING / INSPECTION REPORT

REPORT NO : VT-180808-3

COMPANY : Apacer Technology Inc.

ADDRESS : 1F., No.32, Zhongcheng Rd., Tucheng Dist.,  
New Taipei City 236, Taiwan (R.O.C)

TEL : 886-2-2267-8000

FAX : 886-2-2267-2261

SPECIMEN : MO-297 SSD

DATE OF RECEIVED : 2018/08/01

DATE OF TESTED : 2018/08/03

TEST / INSPECTION ITEMS : Vibration / Shock Test

## REMARKS :

- The laboratory is accredited by ISO/IEC 17025 General Requirements for the Competence of Calibration and Testing Laboratory.
- The results only apply to the device under test.
- This report is 26 pages, and no part of it may be abstracted or reproduced.

金頓科技實

|                      |                  |                      |
|----------------------|------------------|----------------------|
| Test Engineer :      |                  | <i>Peter Peng</i>    |
| Approval Signatory : | <i>David Lee</i> | Laboratory Head :    |
| <i>2018.8.13</i>     |                  | <i>Min Zhi Cheng</i> |

## TESTING / INSPECTION REPORT

### TESTING EQUIPMENT :

- |                         |   |
|-------------------------|---|
| 1.Vibration Tester      | : KING DESIGN KD-9363EM-600F2K-50N120,<br>S/N : KDS11054986 |
| 2.Controller            | : VCS-913 <sup>+</sup> , S/N : 1312384                      |
| 3.Control Accelerometer | : Wilcoxon Research WR-777, S/N : 4207                      |
| 4.Shock Testing System  | : KING DESIGN DP-1200-60, S/N : R2110086489                 |
| 5.Controller            | : DAS-105, S/N : 263210255                                  |
| 6.Accelerometer         | : B&K 4398, S/N : 2209044                                   |
| 7.Shock Testing System  | : KING DESIGN DP-1200-18, S/N : KDS02197998                 |
| 8.Controller            | : DAS-105, S/N : 263210255                                  |
| 9.Accelerometer         | : B&K 8339-001 S/N : 55869                                  |

### TEST ENVIRONMENT :

- |                   |                      |
|-------------------|----------------------|
| Temperature       | : 25°C (25±10°C)     |
| Relative Humidity | : 65% RH (50±25% RH) |

### SPECIMEN :

- |          |             |
|----------|-------------|
| Model    | : Sx170-297 |
| Quantity | : 1 unit    |

## TESTING / INSPECTION REPORT

### TEST SPECIFICATION(1) :

#### **Comply with MIL-STD 810G 514.6 category 7**

Random Vibration test (Non-Operating)

Frequency : 15 Hz to 2,000 Hz

Accelerate : 4.02 g rms

P.S.D. : 0.01 g<sup>2</sup>/Hz (15Hz)

0.01 g<sup>2</sup>/Hz (105.94Hz)

+6 dB/Oct (105.94Hz to 150Hz)

0.02 g<sup>2</sup>/Hz (150Hz)

0.02 g<sup>2</sup>/Hz (500Hz)

-6 dB/Oct (500Hz to 2,000Hz)

0.0013 g<sup>2</sup>/Hz (2,000Hz)

Test Axis : X, Y, Z axis

Test Time : 1 hr (Each axis)

Total Test Time : 3 hrs

### TEST SPECIFICATION(2) :

#### **Comply with MIL-STD 810G 514.6 category 24**

Random Vibration test (Operating)

Frequency : 20 Hz to 2,000 Hz

Accelerate : 7.69 g rms

P.S.D. : 0.04 g<sup>2</sup>/Hz (20Hz to 1,000Hz)

: -6 dB/Oct (1,000Hz to 2,000Hz)

Test Axis : X, Y, Z axis

Test Time : 1 hr (Each axis)

Total Test Time : 3 hrs

## TESTING / INSPECTION REPORT

### TEST SPECIFICATION(3) :

#### **Comply with MIL-STD-883K, Method 2002.5**

Wave Form : Half sine wave (Non-Operating)  
 Acceleration : 1,500 g  
 Duration Time : 0.5 mS  
 No. of Shock : Each axis 3 times  
 Shock Direction :  $\pm X$ ,  $\pm Y$ ,  $\pm Z$  axis

### TEST SPECIFICATION(4) :


#### **Comply with MIL-STD-202G, Method 213-B**

Wave Form : Half sine wave (Operating)  
 Acceleration : 50 g  
 Duration Time : 11 mS  
 No. of Shock : Each axis 3 times  
 Shock Direction :  $\pm X$ ,  $\pm Y$ ,  $\pm Z$  axis







### TEST RESULT :
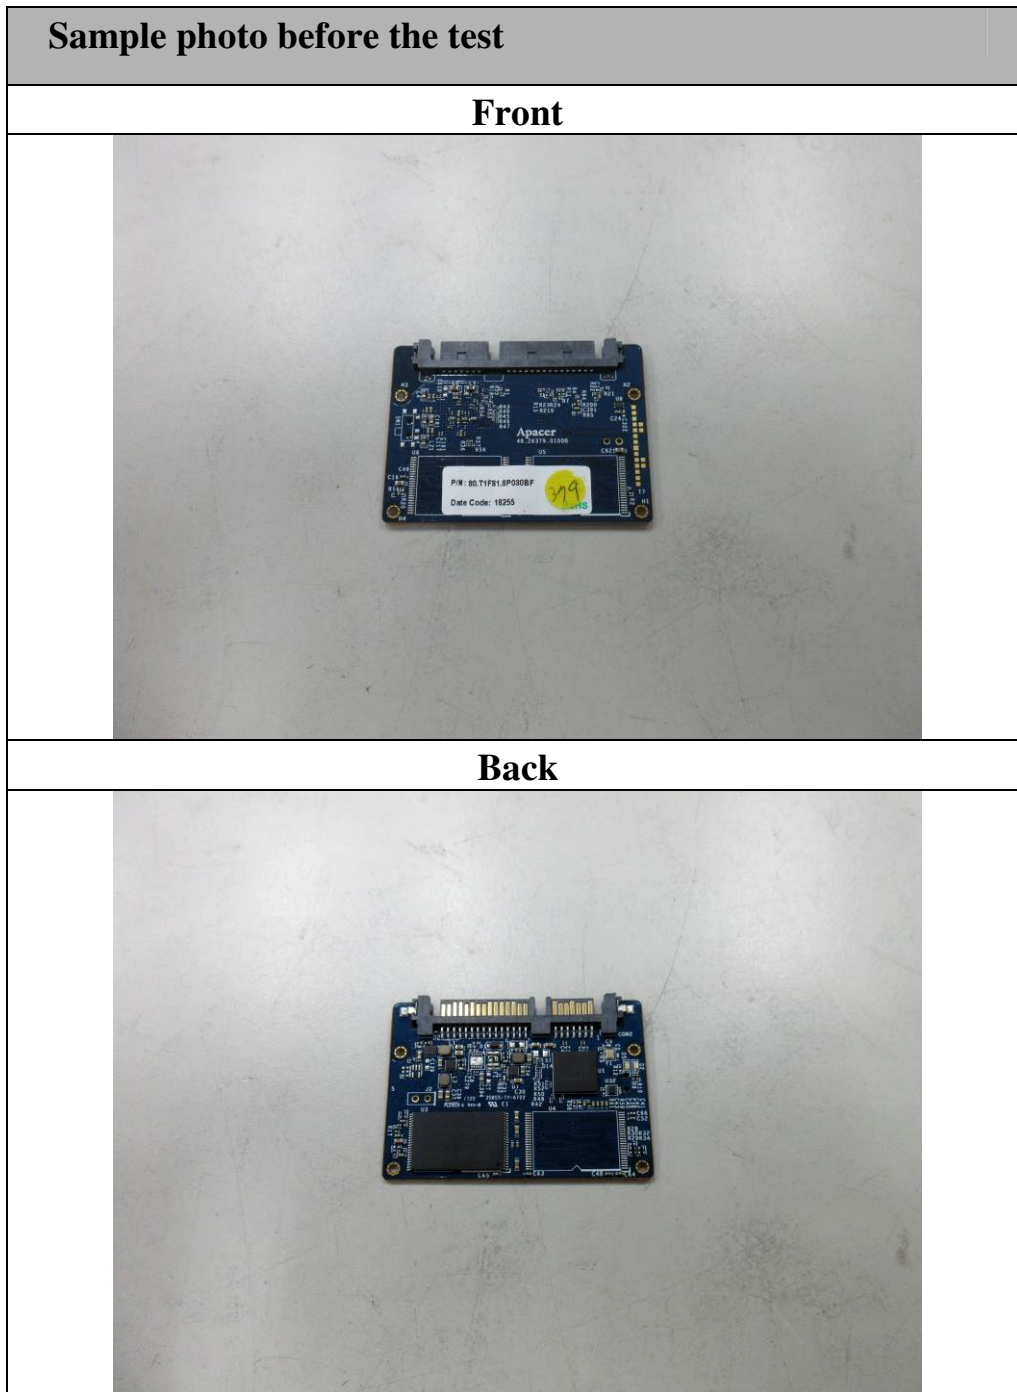
| Describe   | PASS | FAIL | Non-Judgment |
|--|------|------|--------------|
| Function judgment <sup>(1)</sup>                   | √    | ---  | ---          |
| Appearance check <sup>(2)</sup>                    | √    | ---  | ---          |
| (1)--Burn in function was normal after the test.   |      |      |              |
| (2)--No visible damages were found after the test. |      |      |              |







## TESTING / INSPECTION REPORT









## TESTING / INSPECTION REPORT
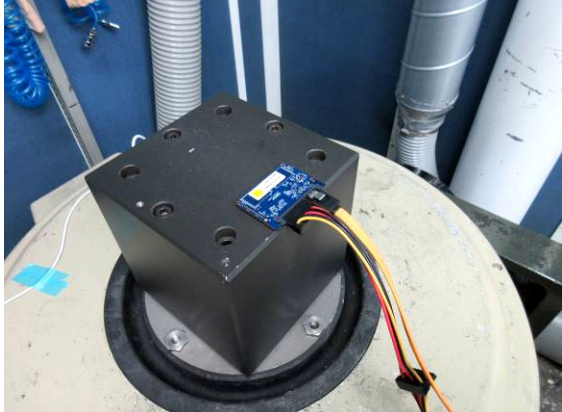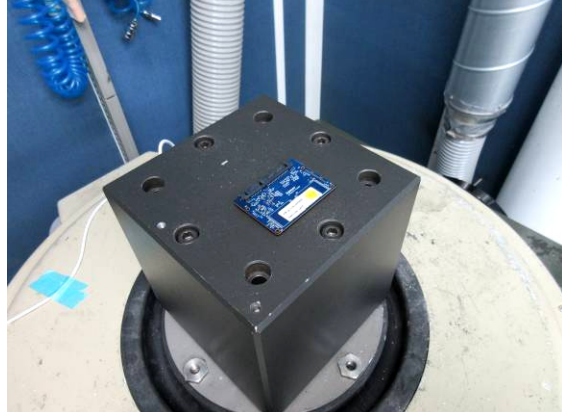
| Vibration testing photos  |  |
|---|--|
| <b>X axis (Operating)</b>   | <b>X axis (Non-Operating)</b>  |
|   |   |
| <b>Y axis (Operating)</b>   | <b>Y axis (Non-Operating)</b>  |
|  |  |
| <b>Z axis (Operating)</b>   | <b>Z axis (Non-Operating)</b>  |
|  |  |


## TESTING / INSPECTION REPORT
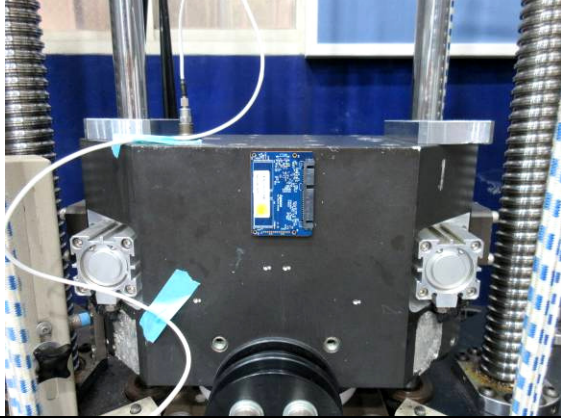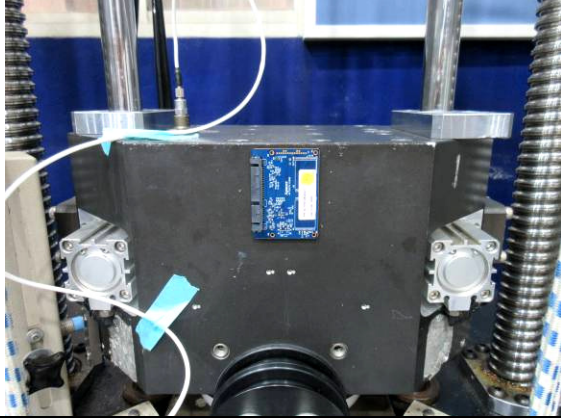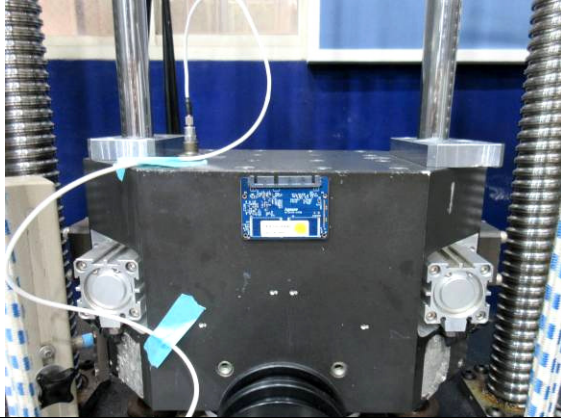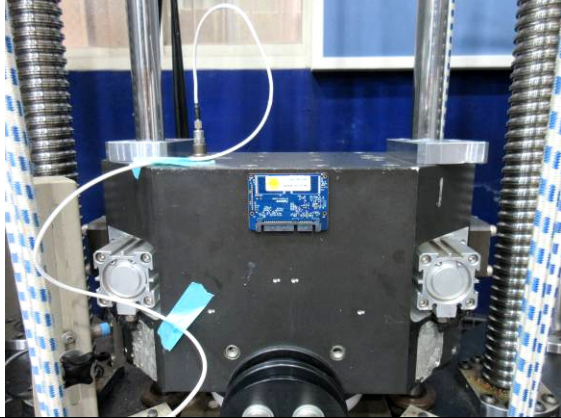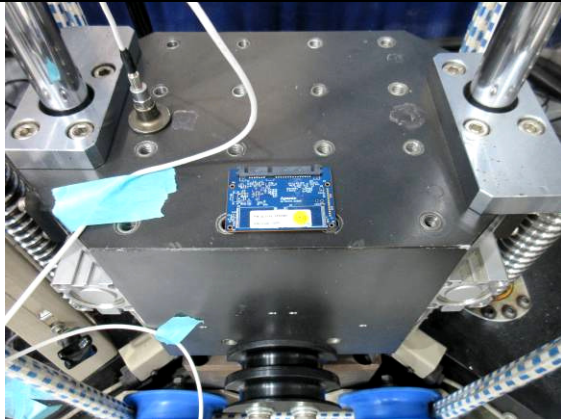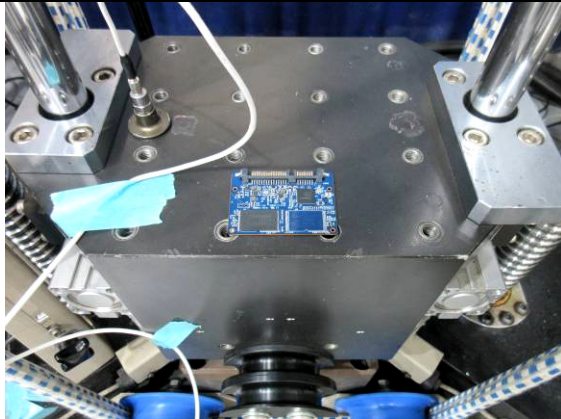
| Shock testing photos (Non-operating)  |  |
|---|--|
| <b>+X axis</b>  | <b>-X axis</b>   |
|   |   |
| <b>+Y axis</b>  | <b>-Y axis</b>   |
|  |  |
| <b>+Z axis</b>  | <b>-Z axis</b>   |
|  |  |

## TESTING / INSPECTION REPORT
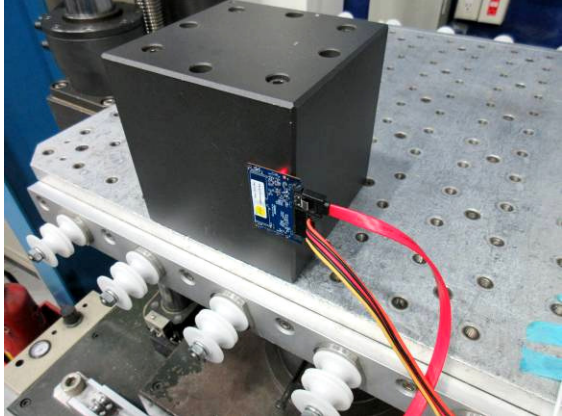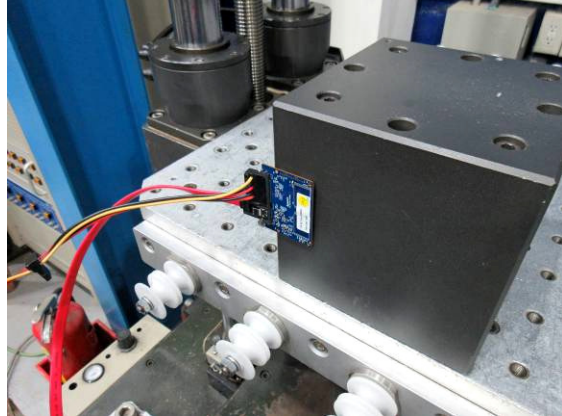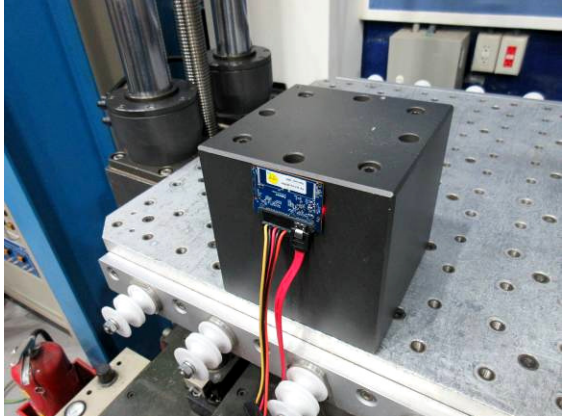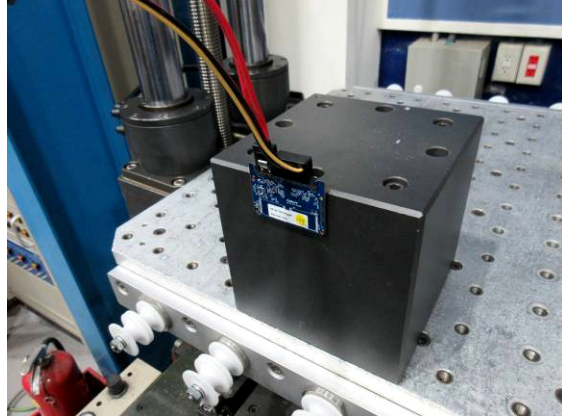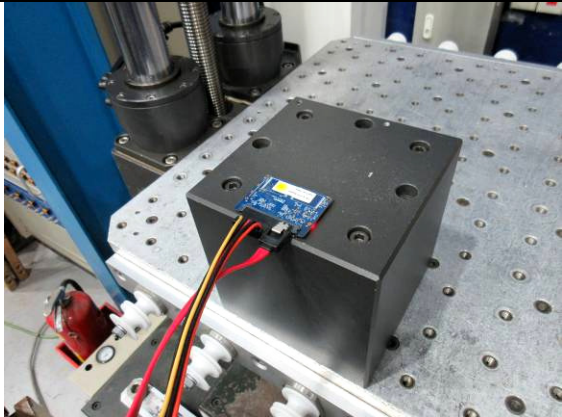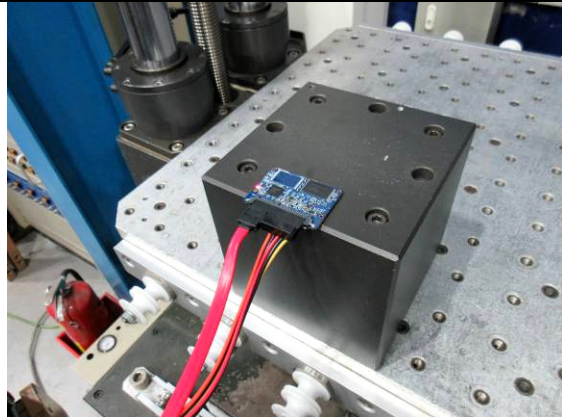
| Shock testing photos (Operating)  |  |
|---|--|
| <b>+X axis</b>  | <b>-X axis</b>   |
|   |   |
| <b>+Y axis</b>  | <b>-Y axis</b>   |
|  |  |
| <b>+Z axis</b>  | <b>-Z axis</b>   |
|  |  |

X axis

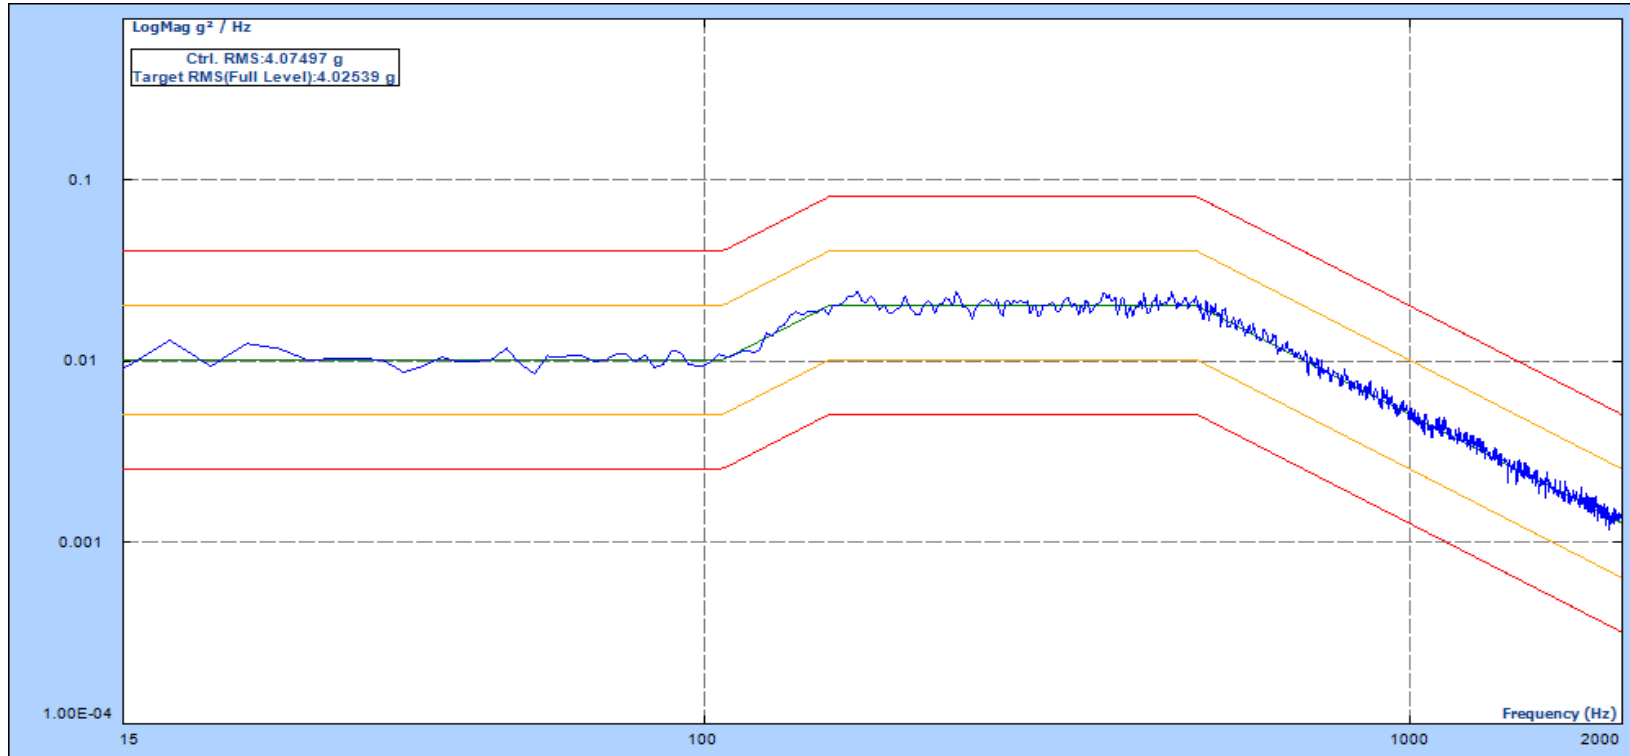

Level: 100.00 %

Velocity Pk: 134.1 mm/s

Remaining: 00:00:00

Drive Pk: 0.423V

Control RMS: 4.075 g


Total Elapsed: 01:01:01

Est. Disp. : 1.730 mm Pk-Pk

Target RMS: 4.020 g

Full Level Elapsed: 01:00:00

Y axis

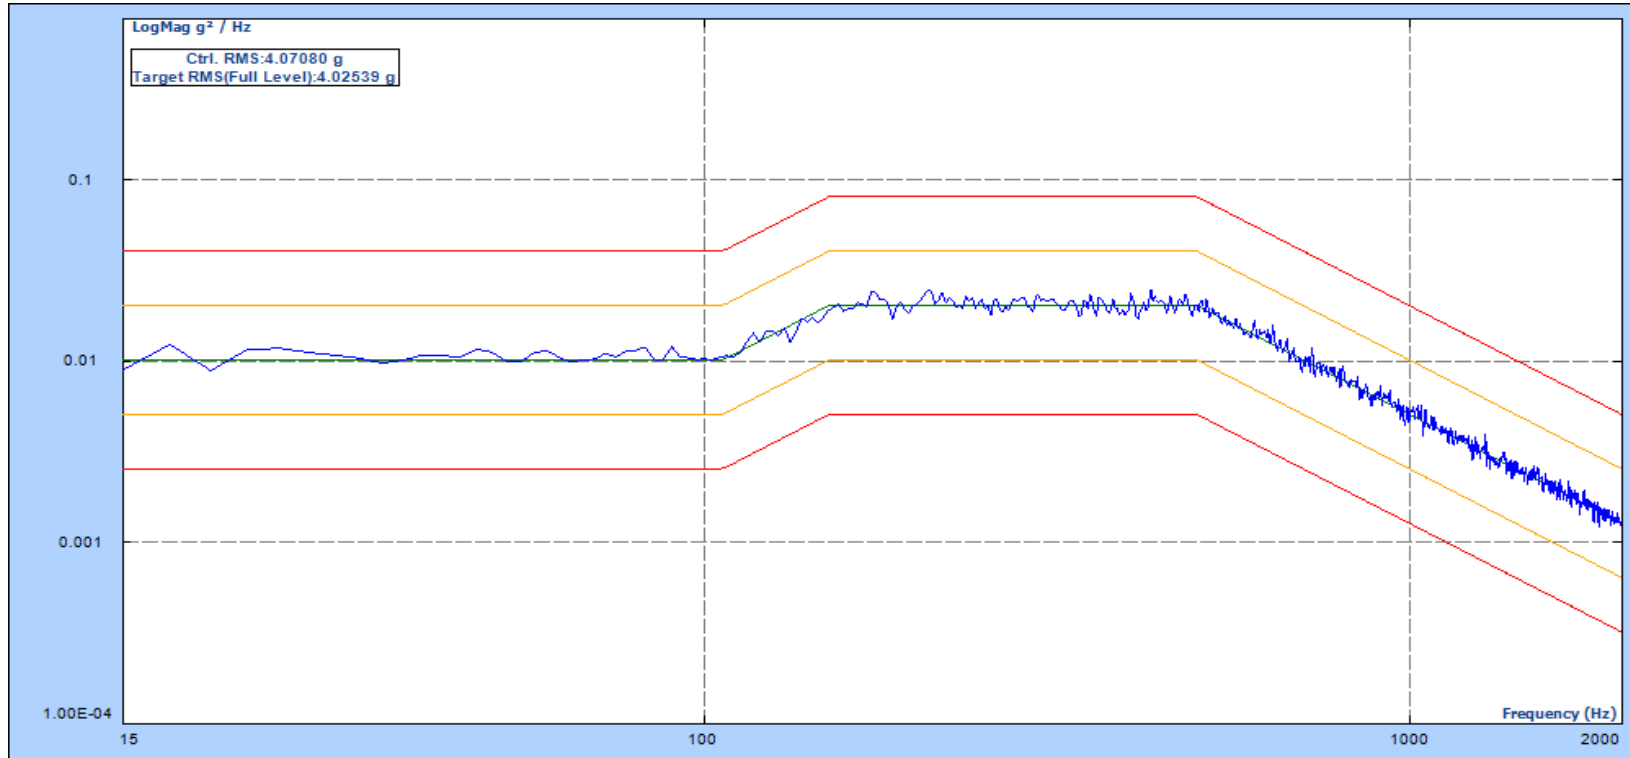


Level: 100.00 %  
 Velocity Pk: 134.3 mm/s  
 Remaining: 00:00:00

Drive Pk: 0.413V  
 Control RMS: 4.071 g  
 Total Elapsed: 01:01:01

Est. Disp. : 1.715 mm Pk-Pk  
 Target RMS: 4.020 g  
 Full Level Elapsed: 01:00:00

Z axis

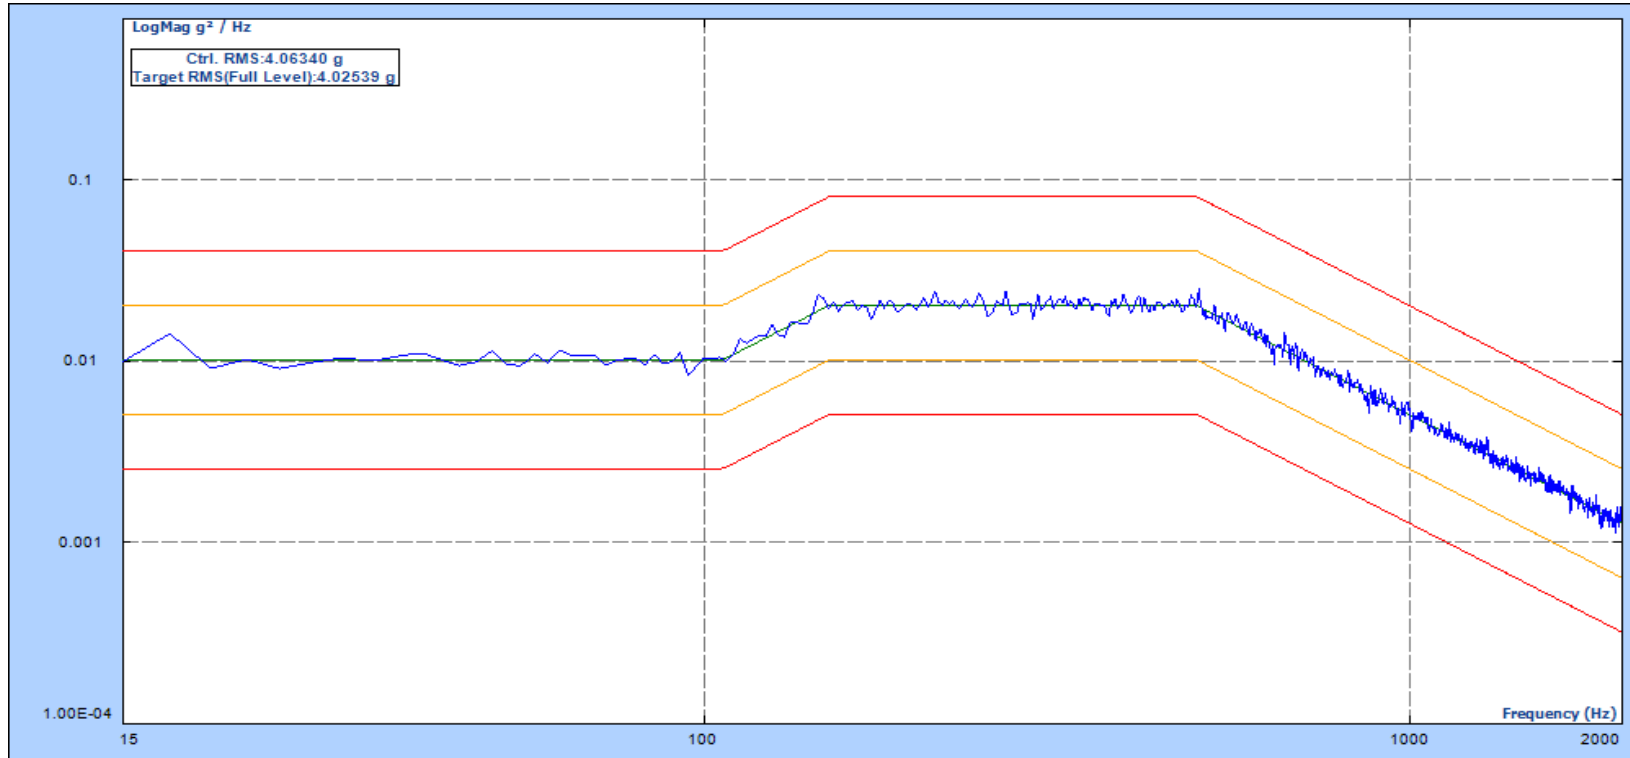


Level: 100.00 %  
 Velocity Pk: 133.9 mm/s  
 Remaining: 00:00:00

Drive Pk: 0.424V  
 Control RMS: 4.064 g  
 Total Elapsed: 01:01:01

Est. Disp. : 1.745 mm Pk-Pk  
 Target RMS: 4.020 g  
 Full Level Elapsed: 01:00:00

X axis

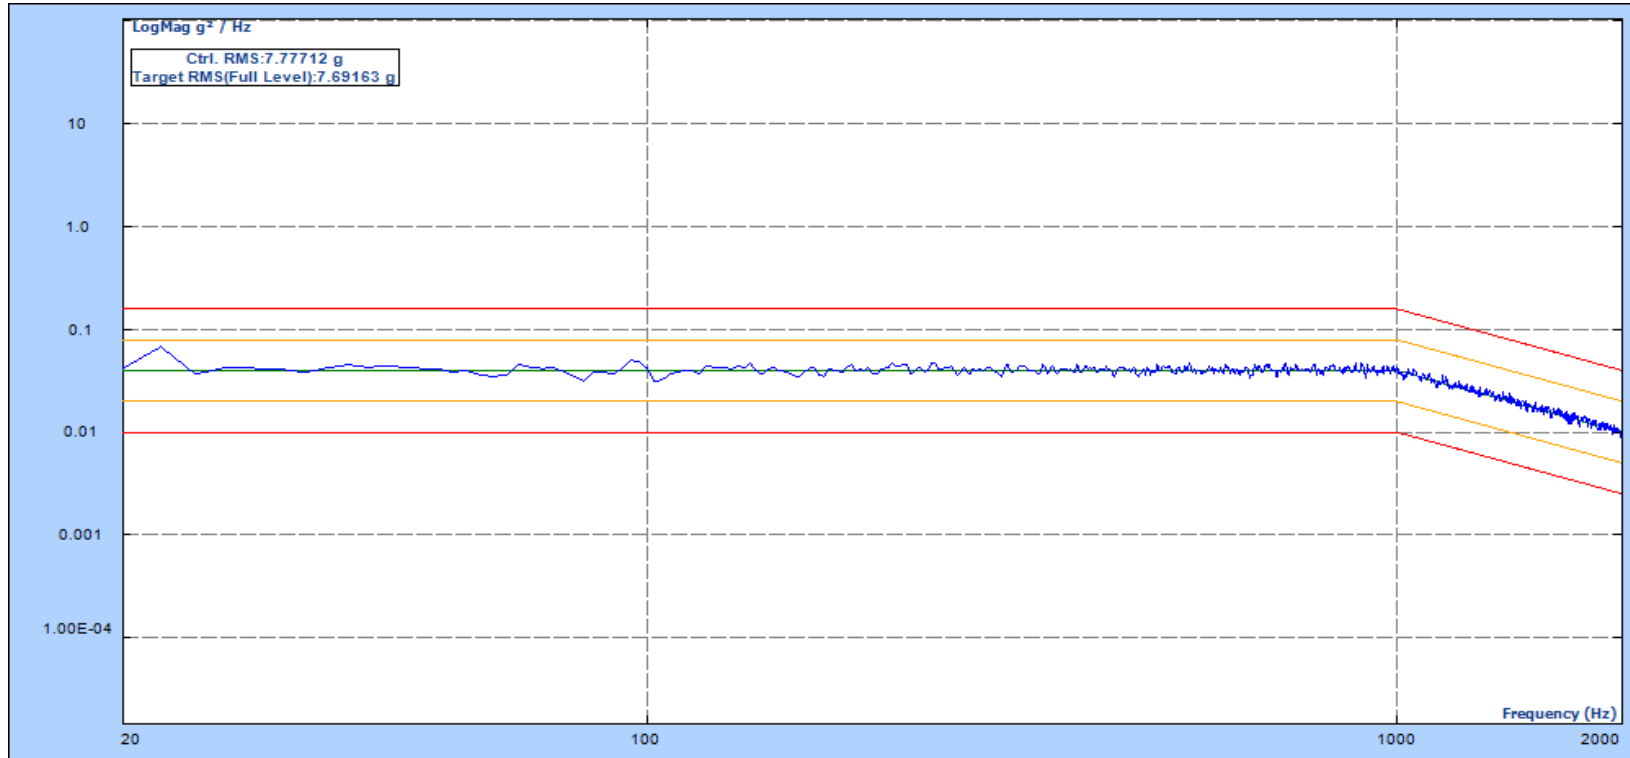

Level: 100.00 %  
 Velocity Pk: 224.0 mm/s  
 Remaining: 00:00:00

Drive Pk: 0.784V  
 Control RMS: 7.777 g  
 Total Elapsed: 01:01:03

Est. Disp. : 2.274 mm Pk-Pk  
 Target RMS: 7.690 g  
 Full Level Elapsed: 01:00:00

Y axis




Level: 100.00 %  
 Velocity Pk: 221.4 mm/s  
 Remaining: 00:00:00

Drive Pk: 0.868V  
 Control RMS: 7.775 g  
 Total Elapsed: 01:01:03

Est. Disp. : 2.210 mm Pk-Pk  
 Target RMS: 7.690 g  
 Full Level Elapsed: 01:00:00

Z axis

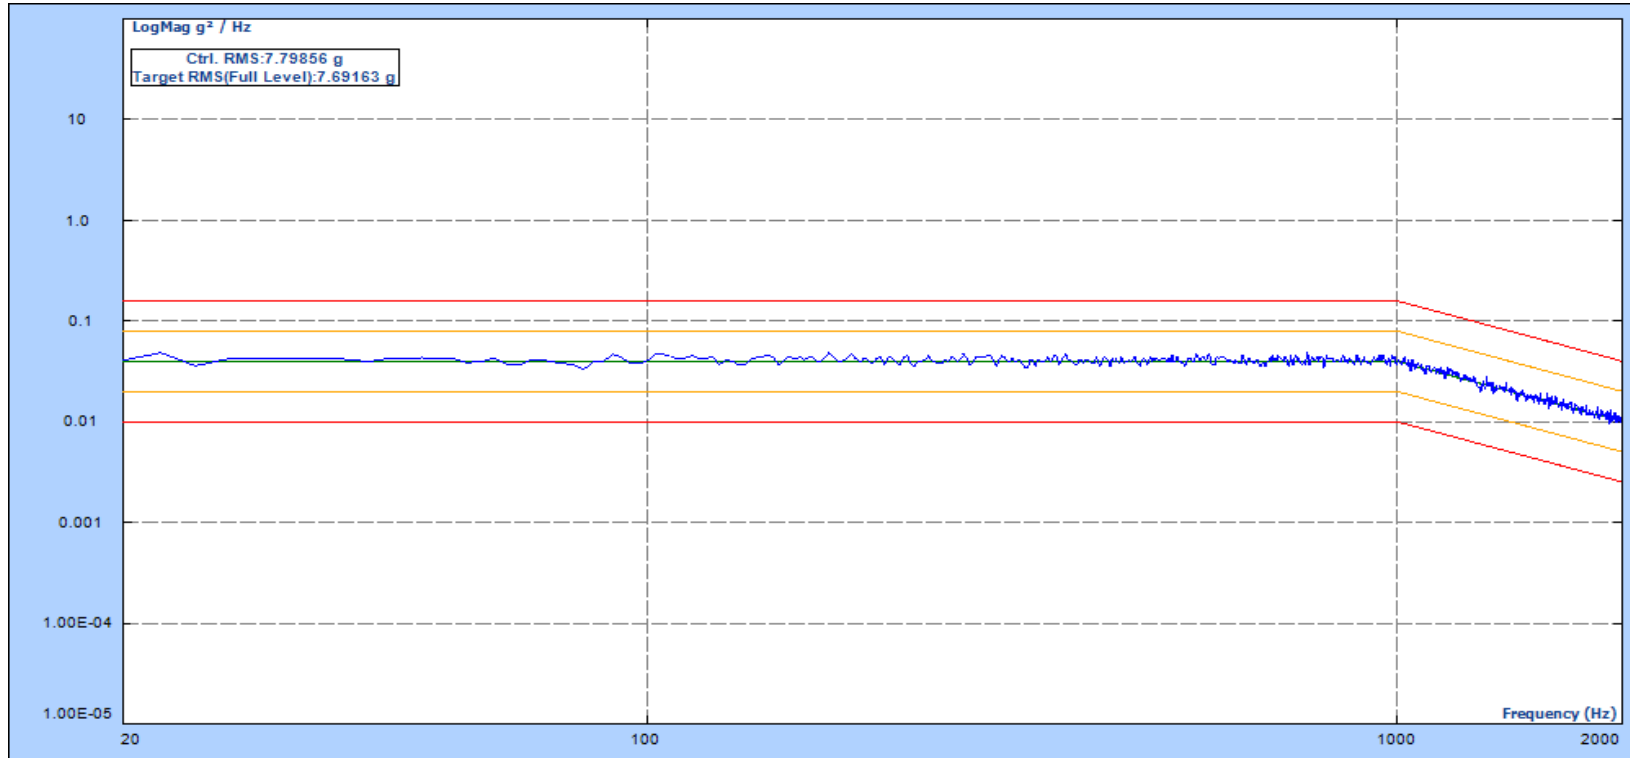


Level: 100.00 %  
 Velocity Pk: 219.5 mm/s  
 Remaining: 00:00:00

Drive Pk: 0.837V  
 Control RMS: 7.798 g  
 Total Elapsed: 01:01:01

Est. Disp. : 2.171 mm Pk-Pk  
 Target RMS: 7.690 g  
 Full Level Elapsed: 01:00:00


+X axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 1543.17           | 0.52          | 4.42            | 10000.00    | 1543.17      | -308.84      |

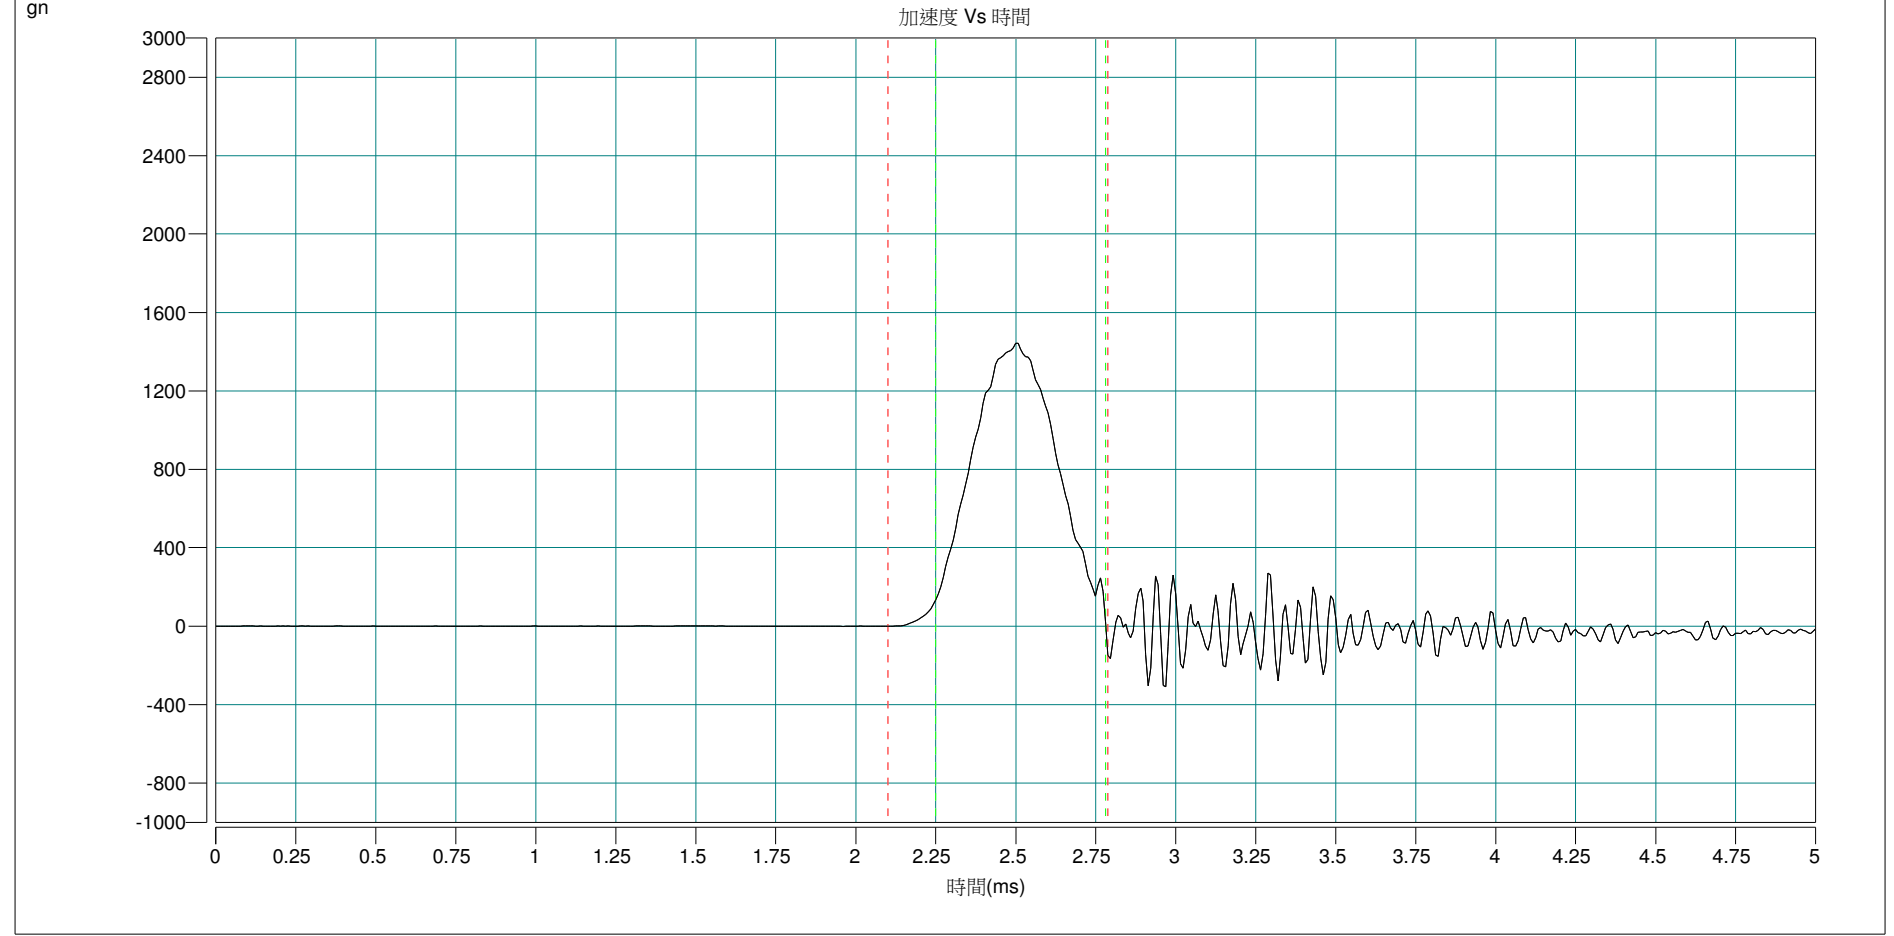


-X axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 1563.51           | 0.52          | 4.45            | 10000.00    | 1563.51      | -296.72      |

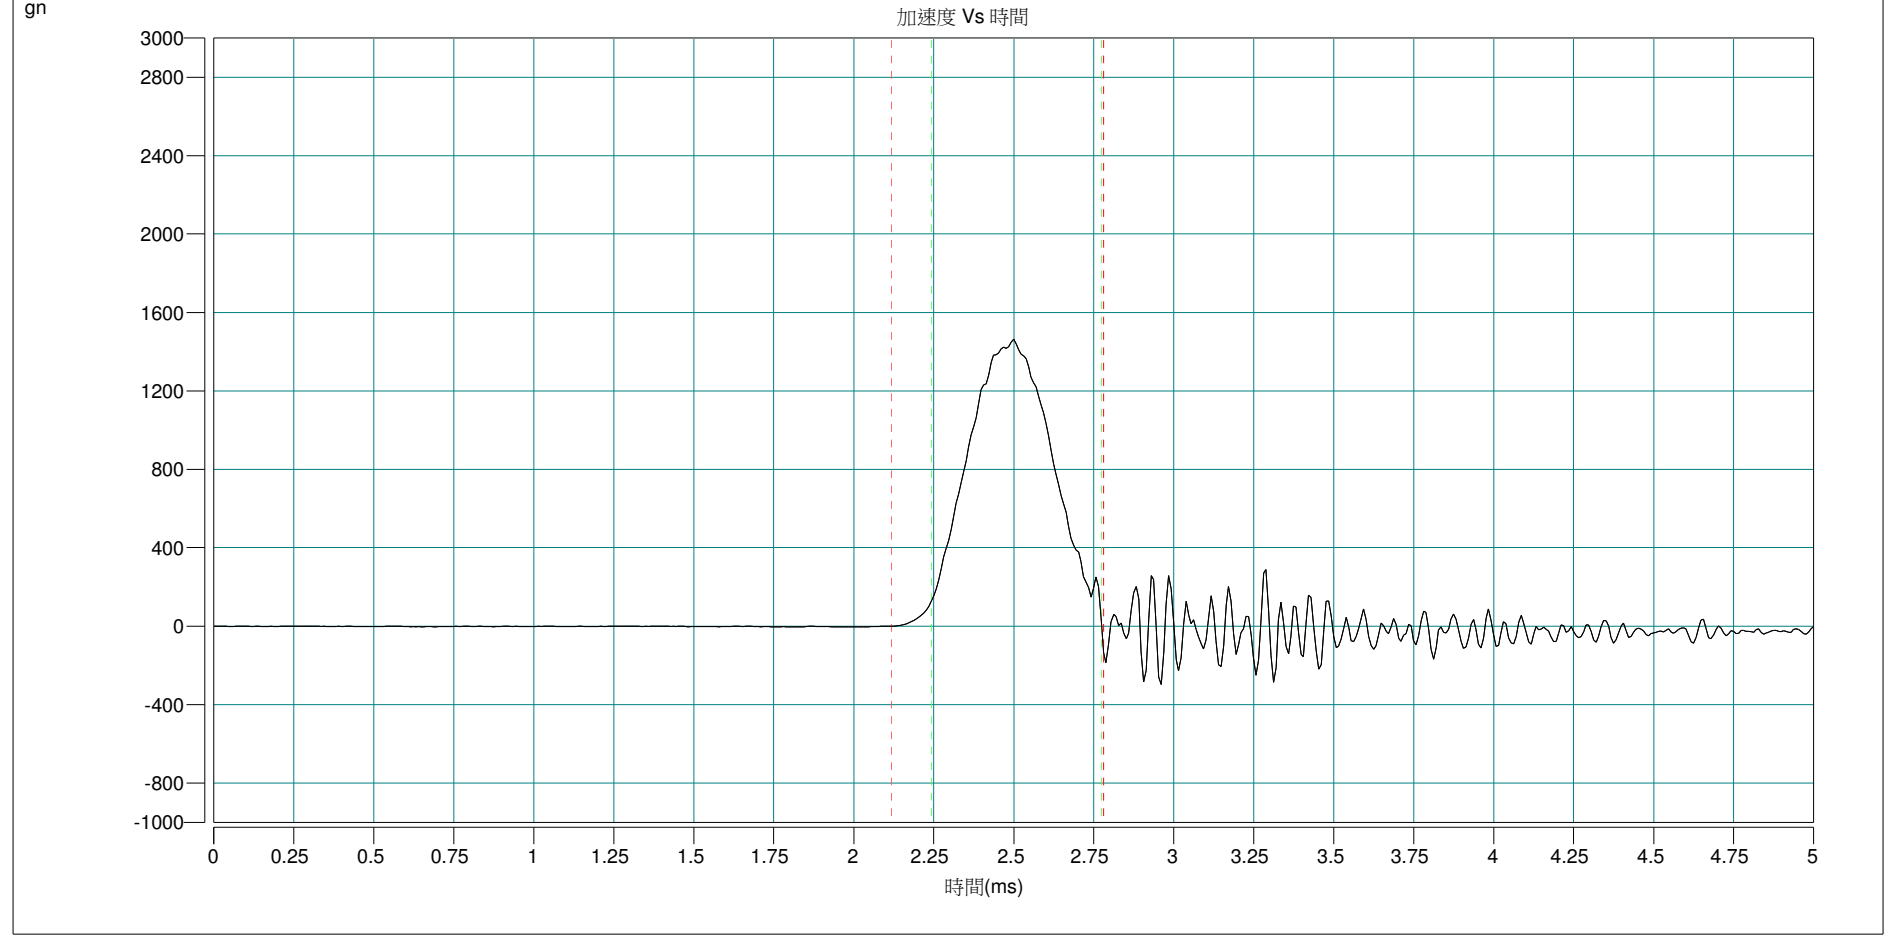


+Y axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 1573.41           | 0.52          | 4.45            | 10000.00    | 1573.41      | -314.31      |

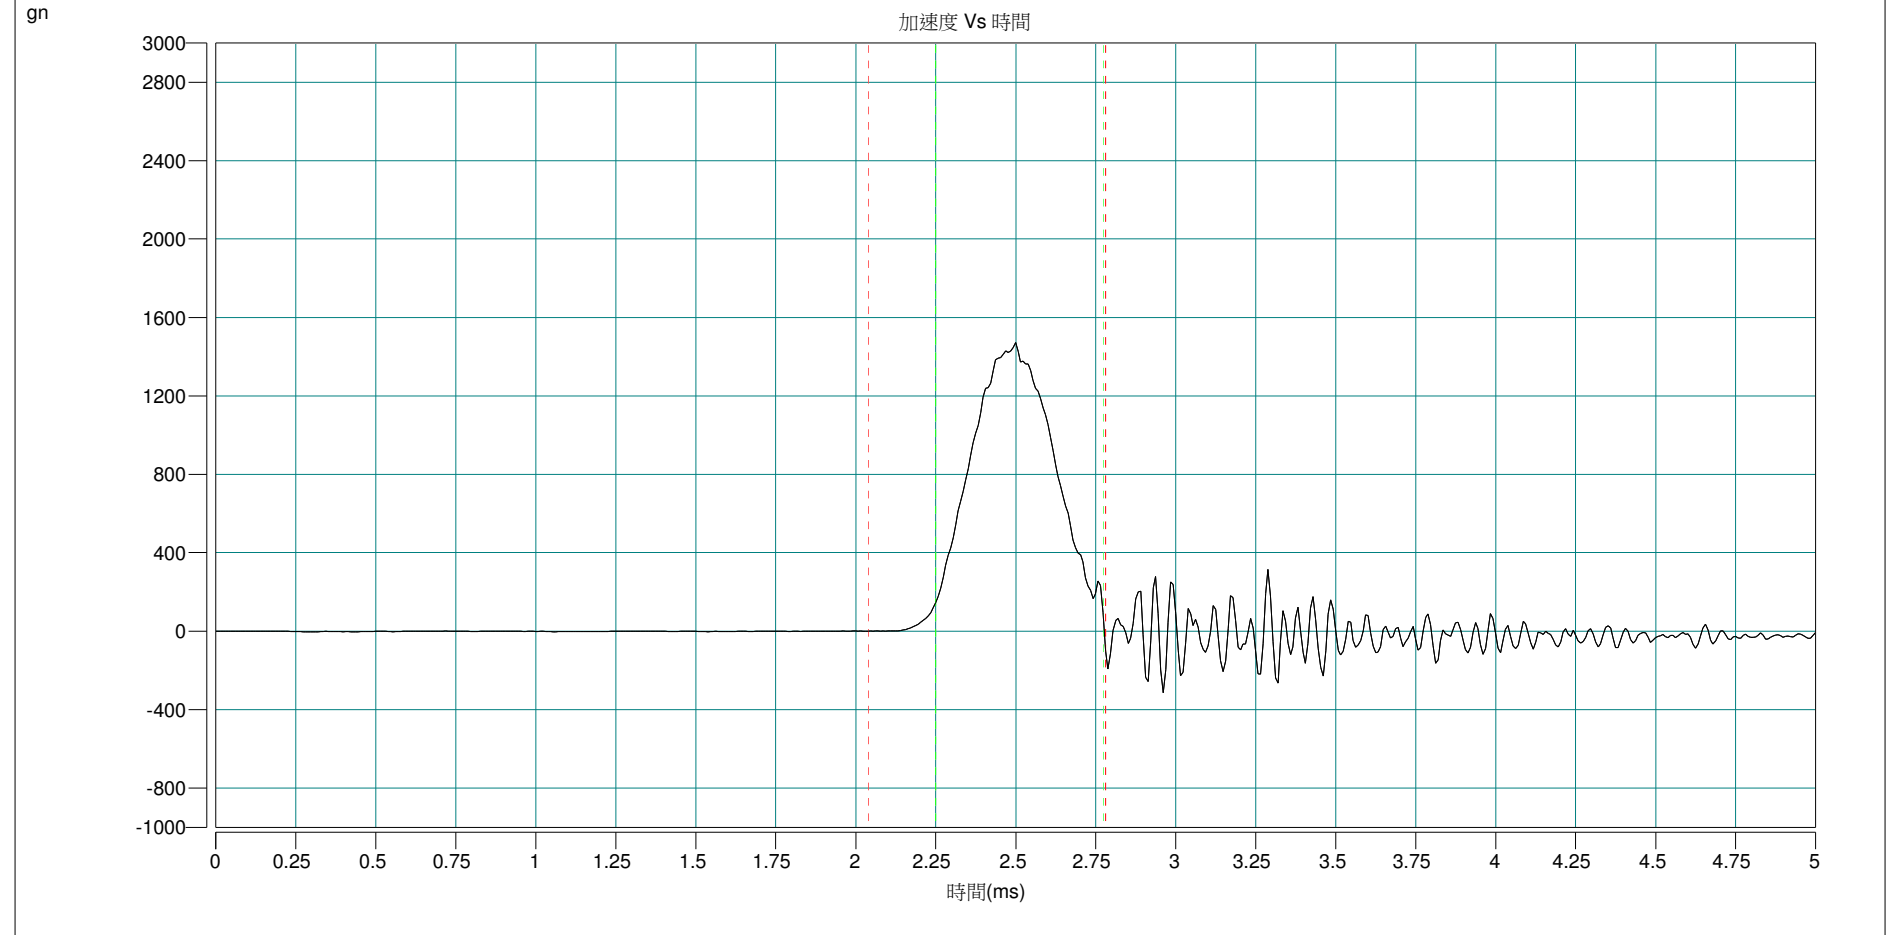


-Y axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 1572.06           | 0.53          | 4.64            | 10000.00    | 1572.06      | -308.67      |

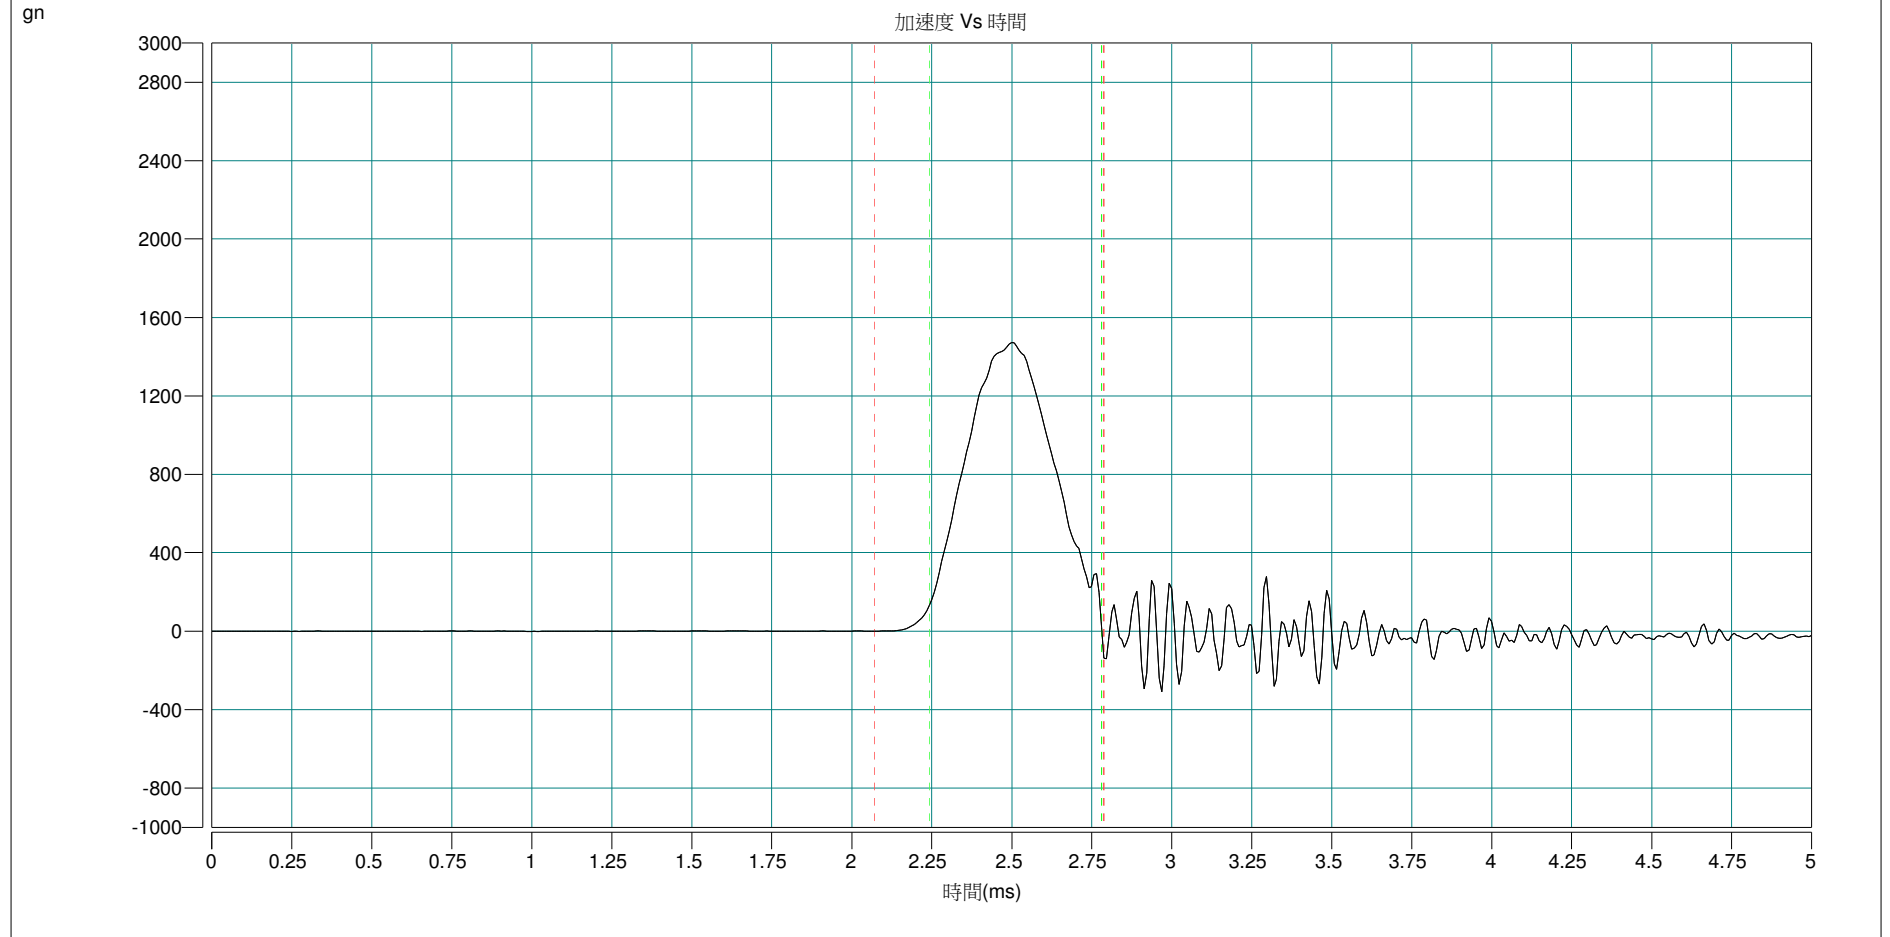


+Z axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 1578.35           | 0.58          | 4.54            | 10000.00    | 1578.35      | -343.04      |

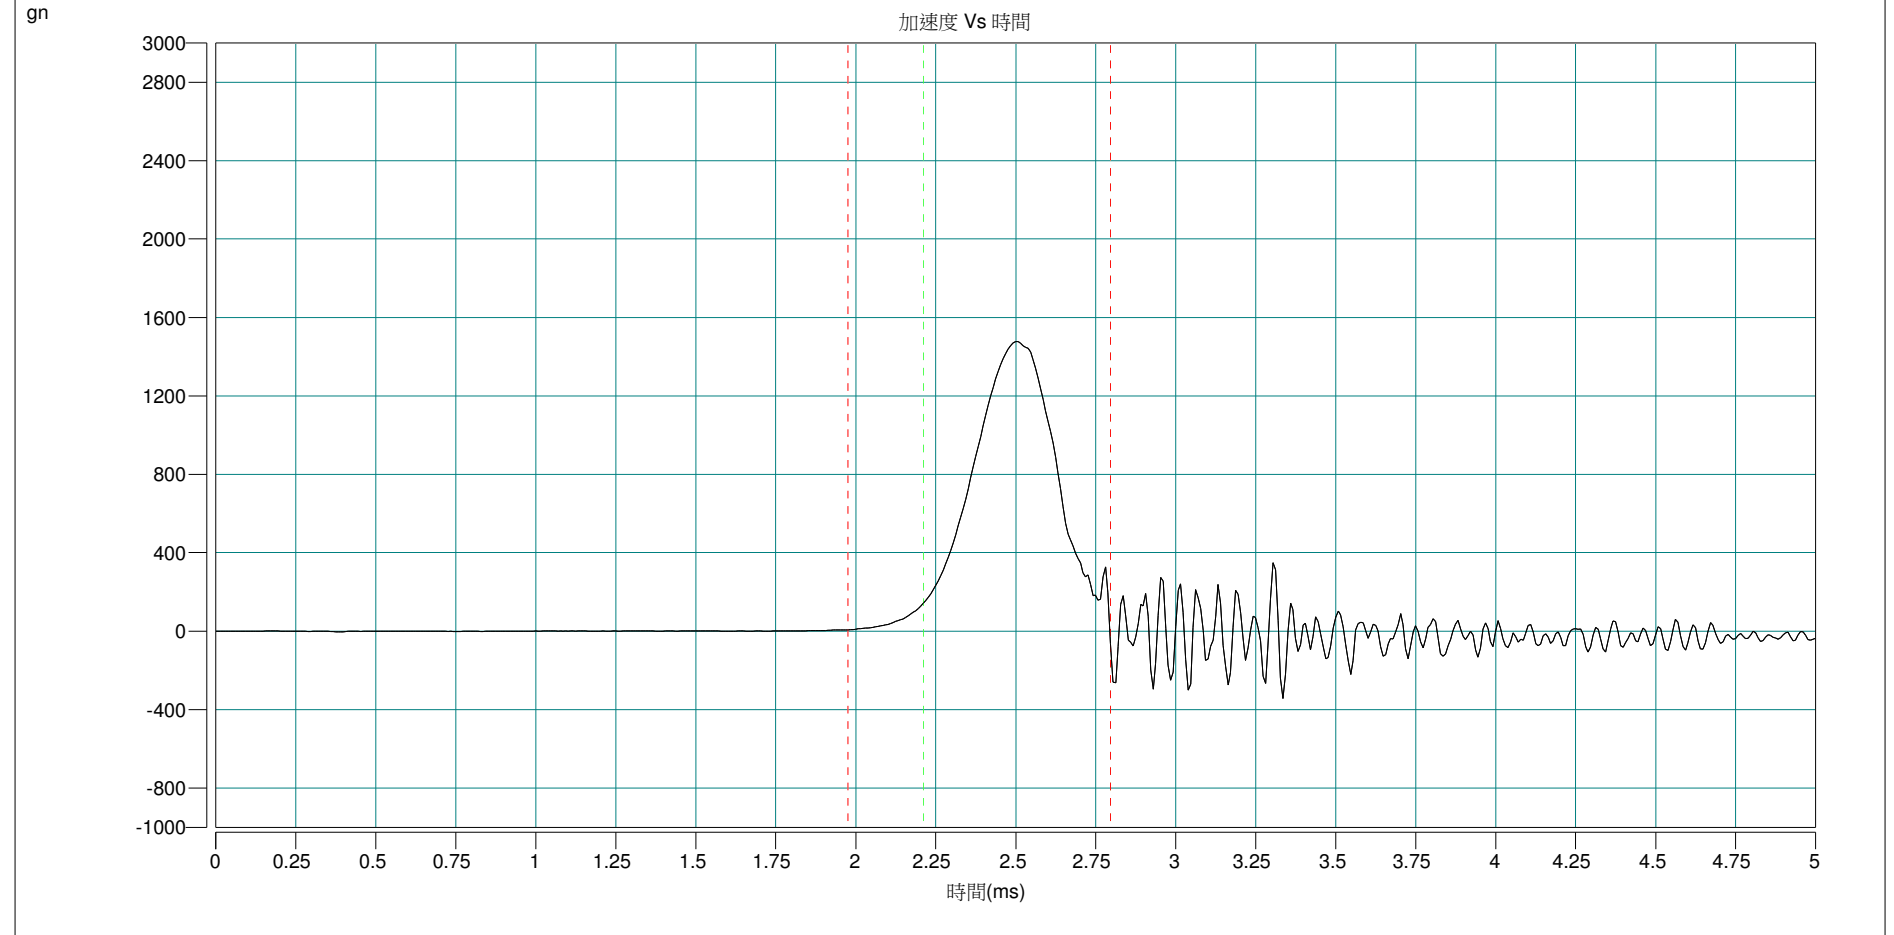


-Z axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 1590.30           | 0.50          | 4.33            | 10000.00    | 1590.30      | -271.67      |

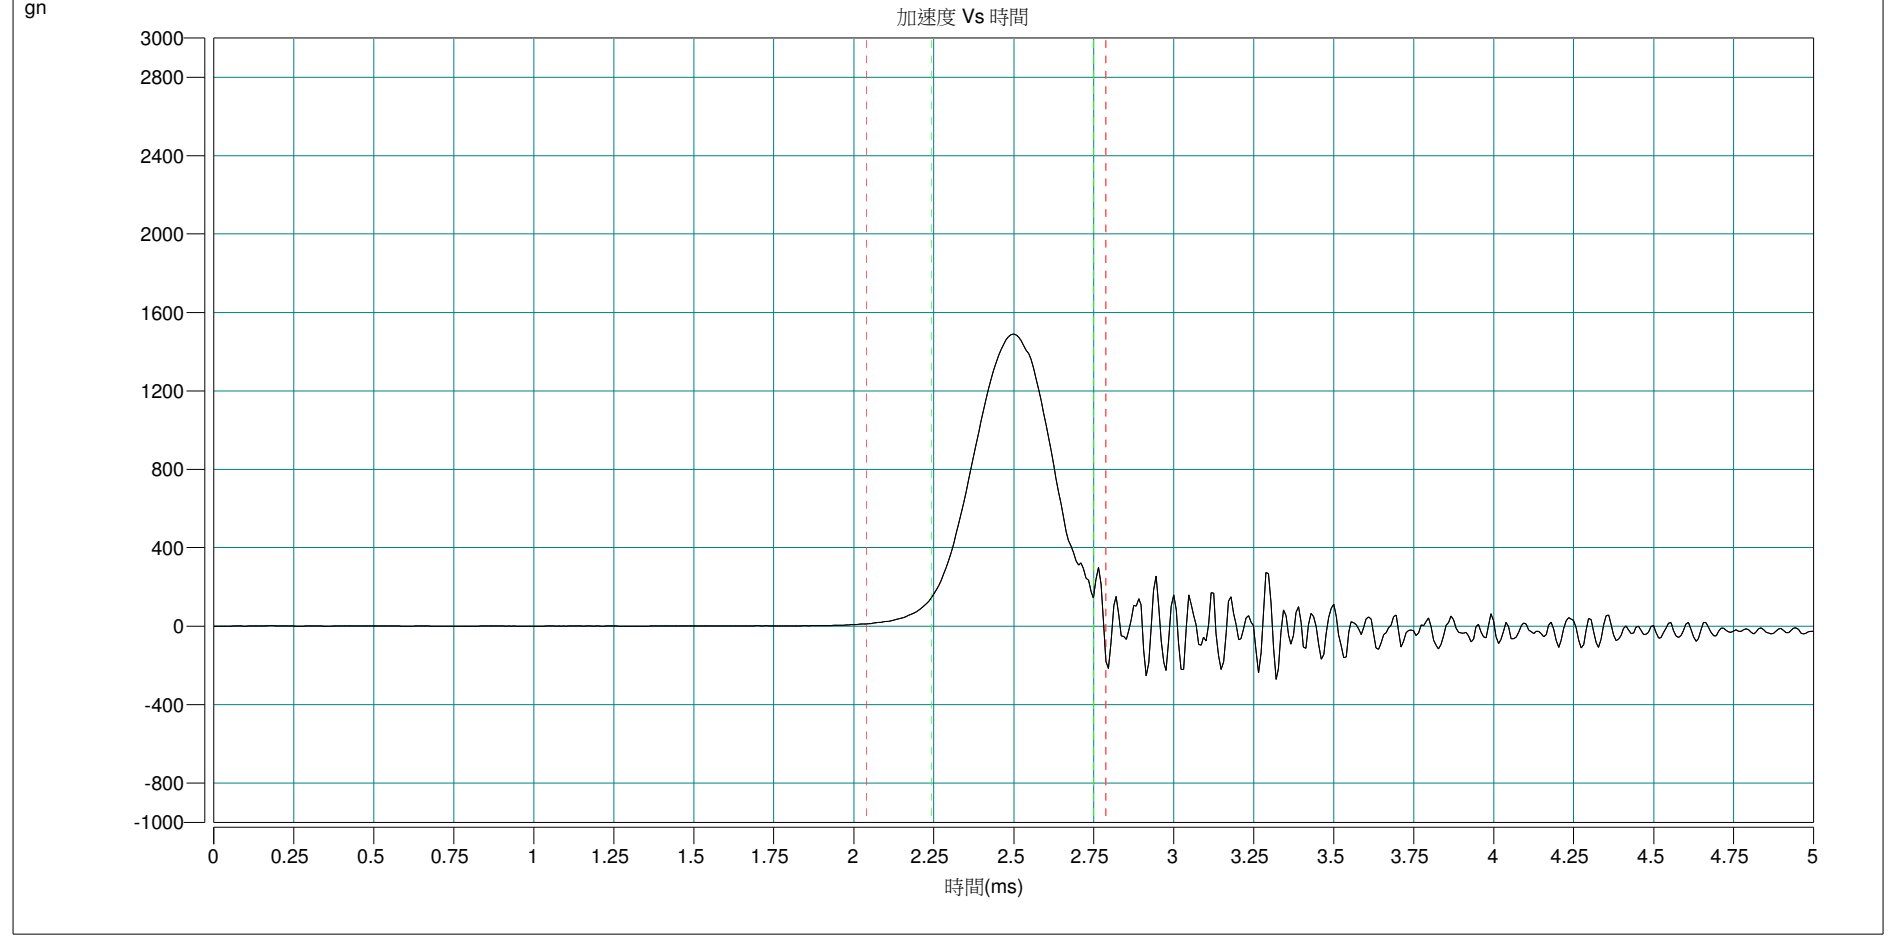


+X axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 51.62             | 11.37         | 3.48            | 500.00      | 51.62        | -3.39        |

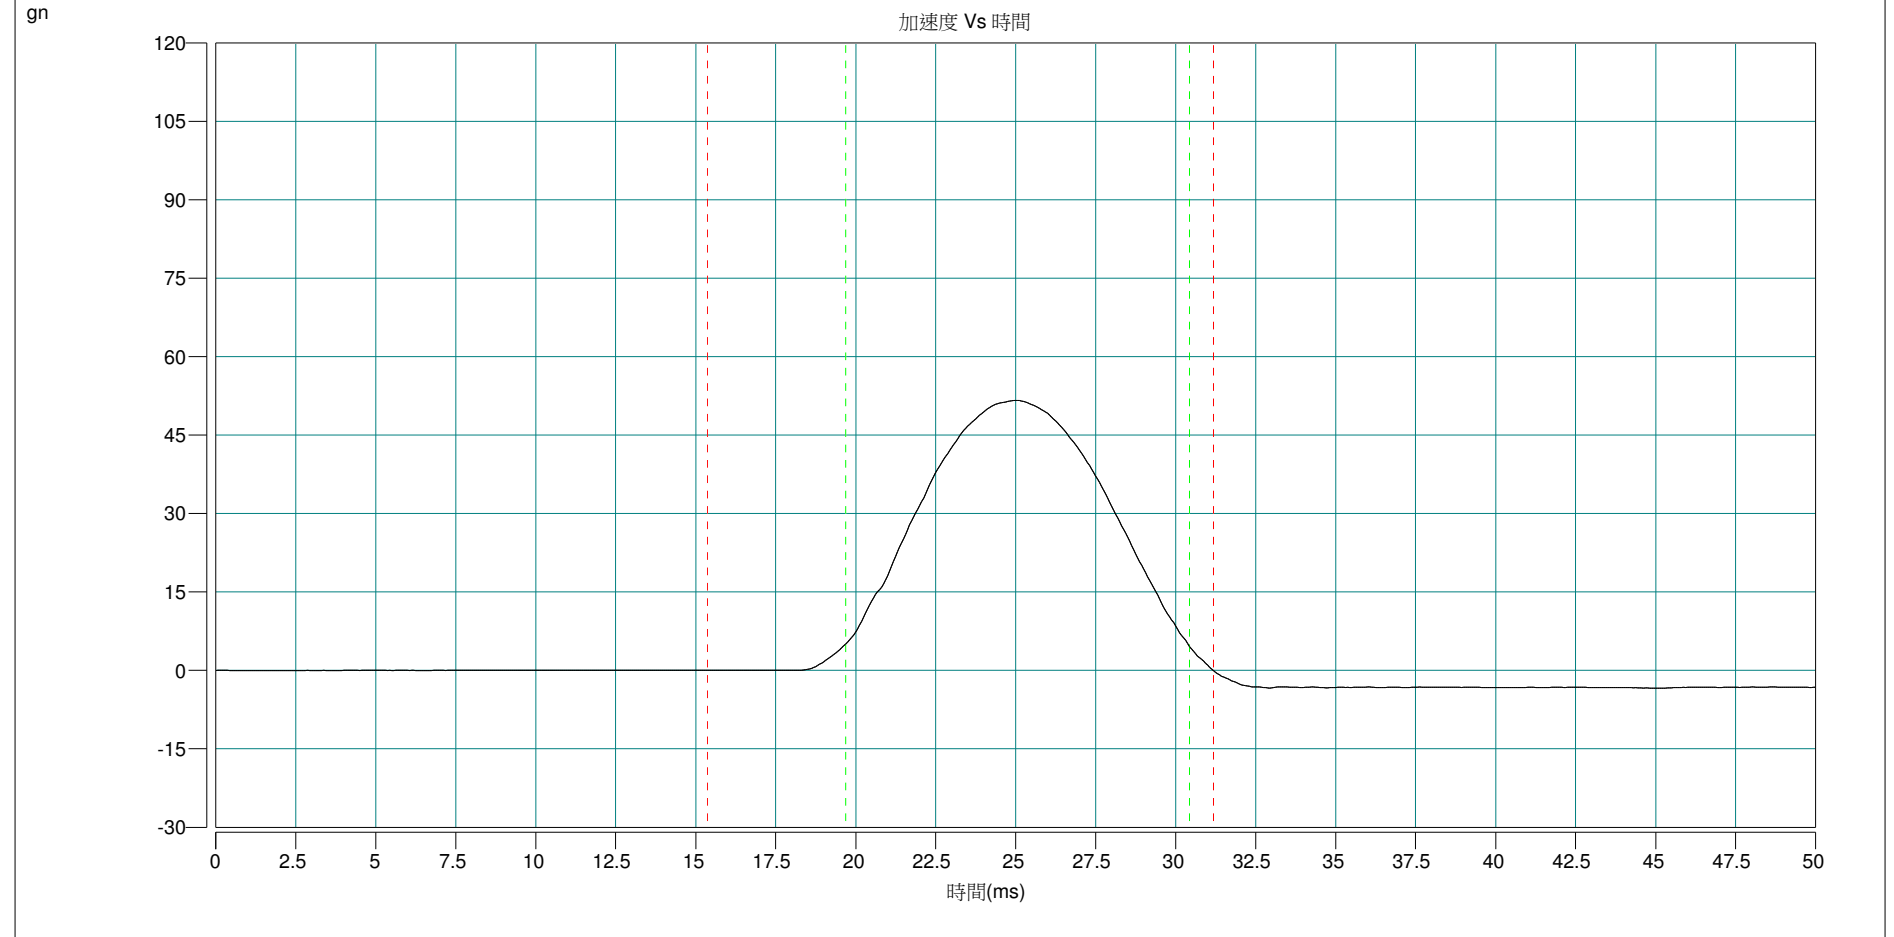


-X axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 51.12             | 11.28         | 3.62            | 500.00      | 51.12        | -3.79        |

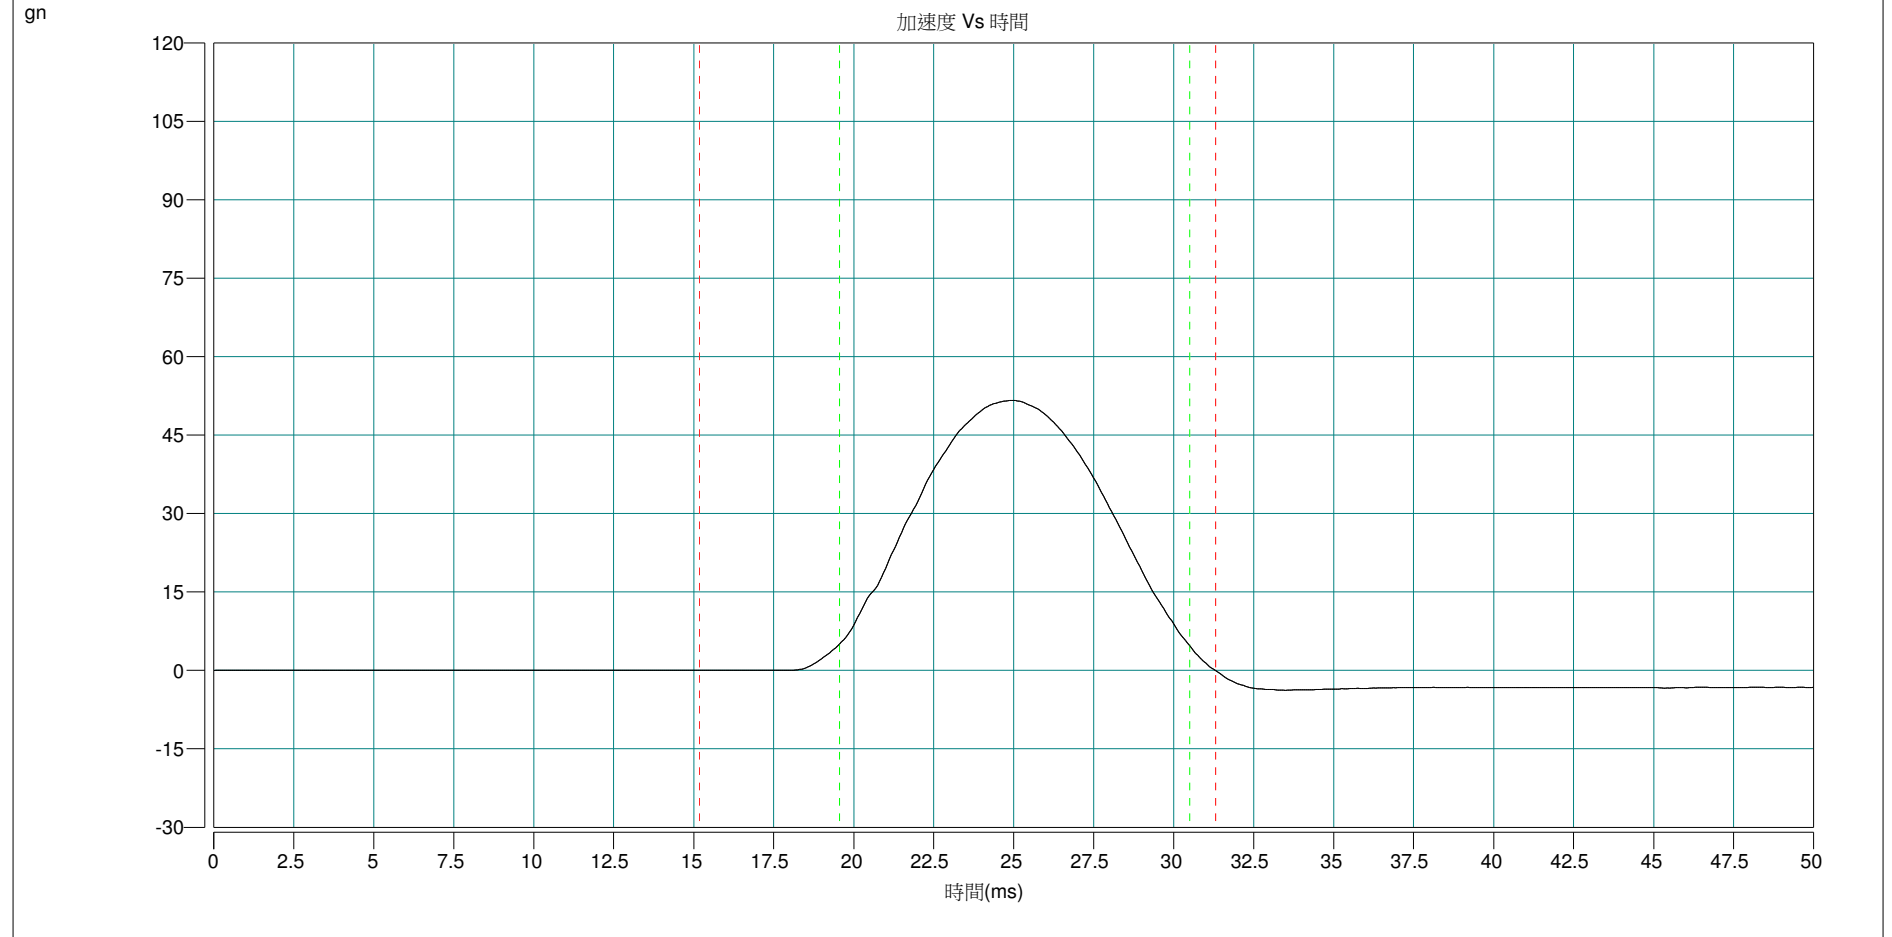


+Y axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 50.96             | 11.05         | 3.51            | 500.00      | 50.96        | -3.83        |

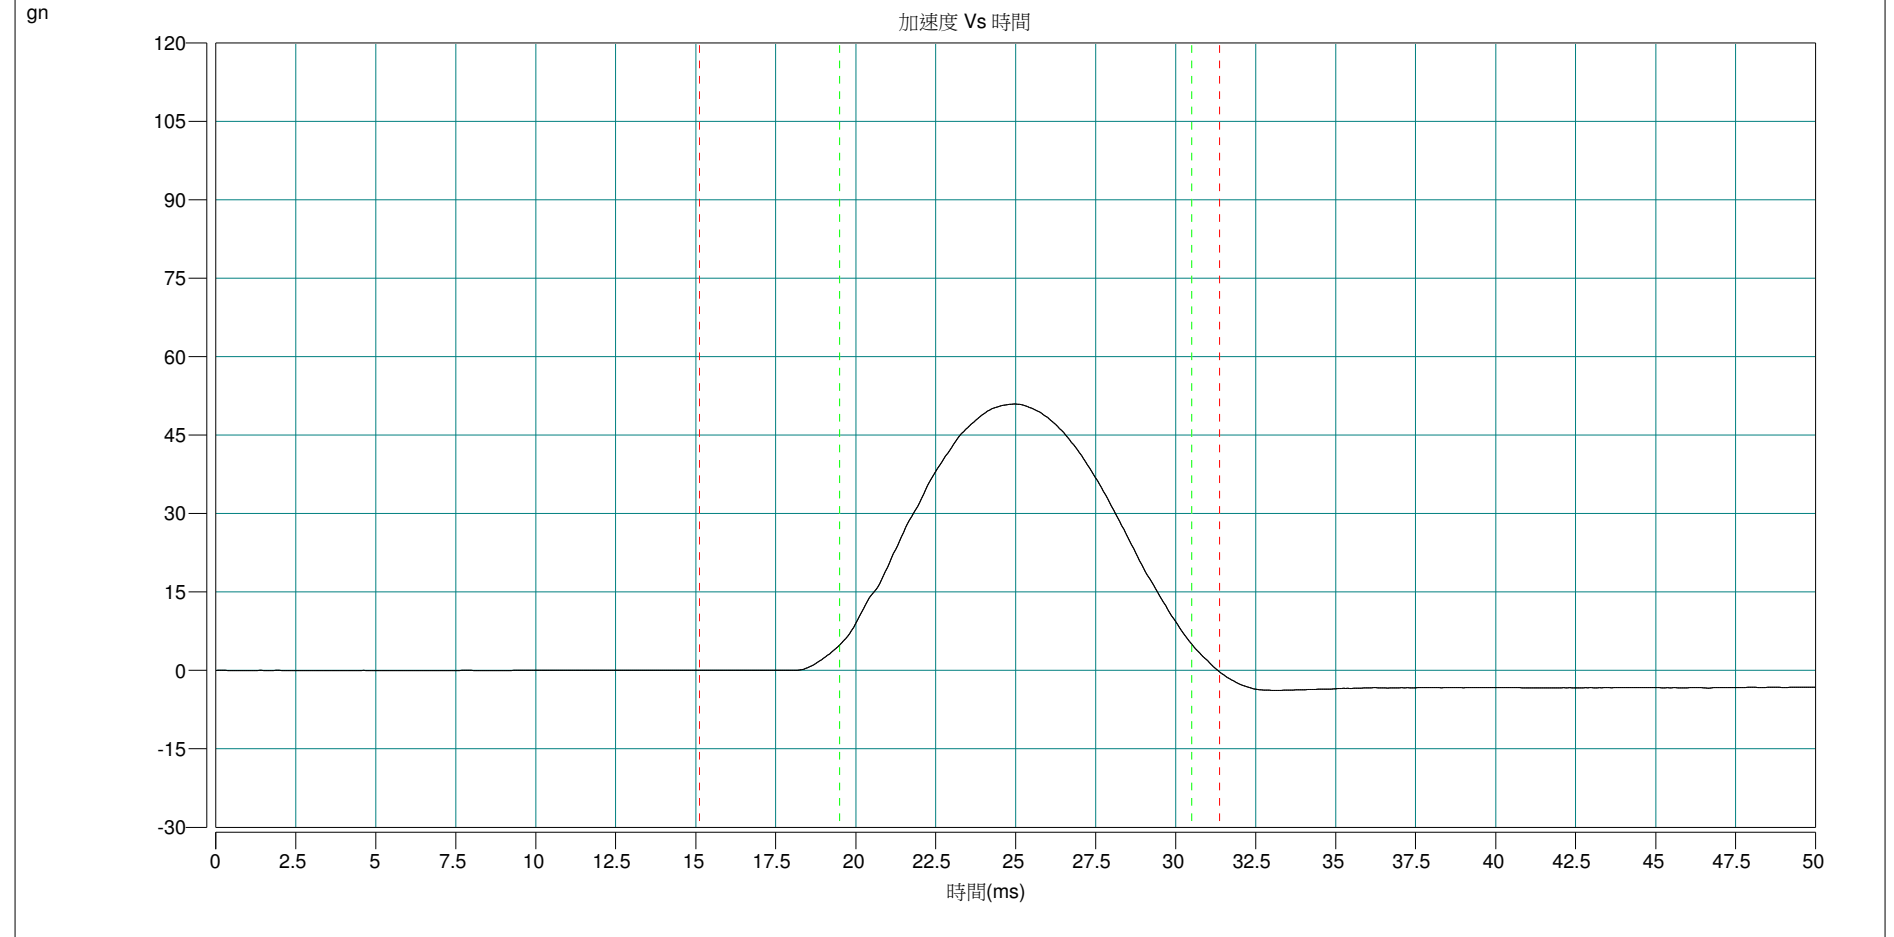


-Y axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 51.05             | 10.96         | 3.52            | 500.00      | 51.05        | -3.80        |

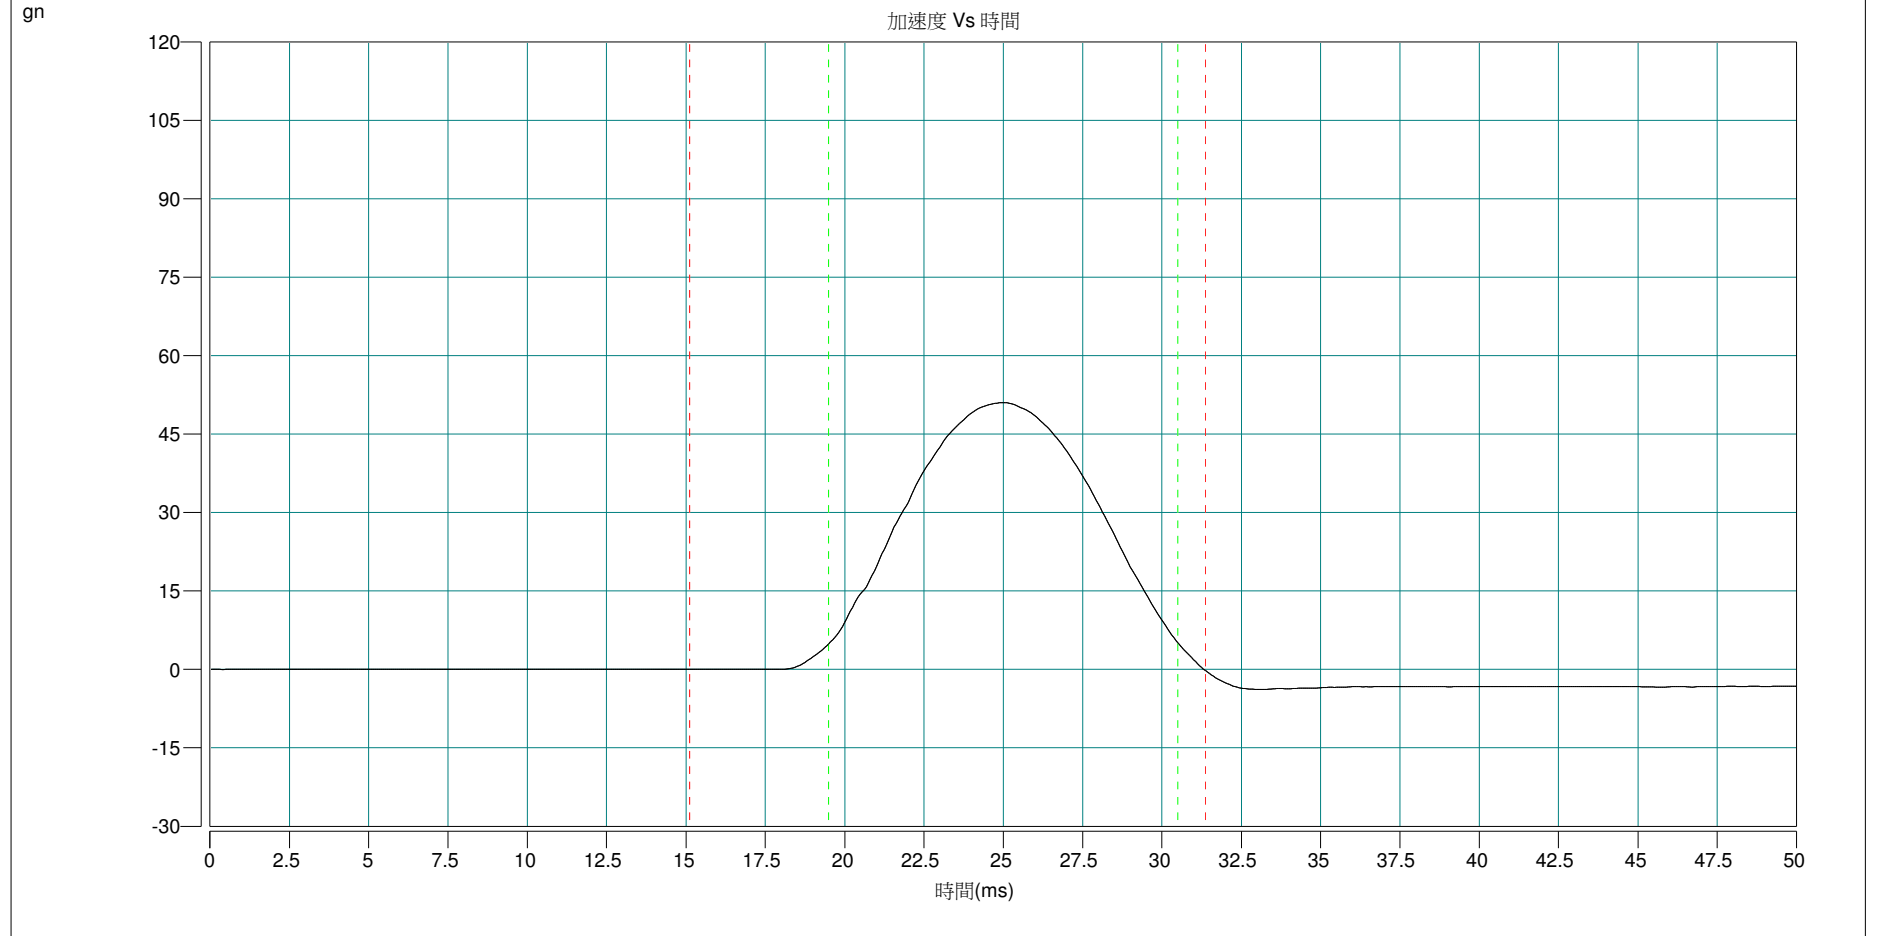


+Z axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 50.95             | 10.98         | 3.52            | 500.00      | 50.95        | -3.80        |

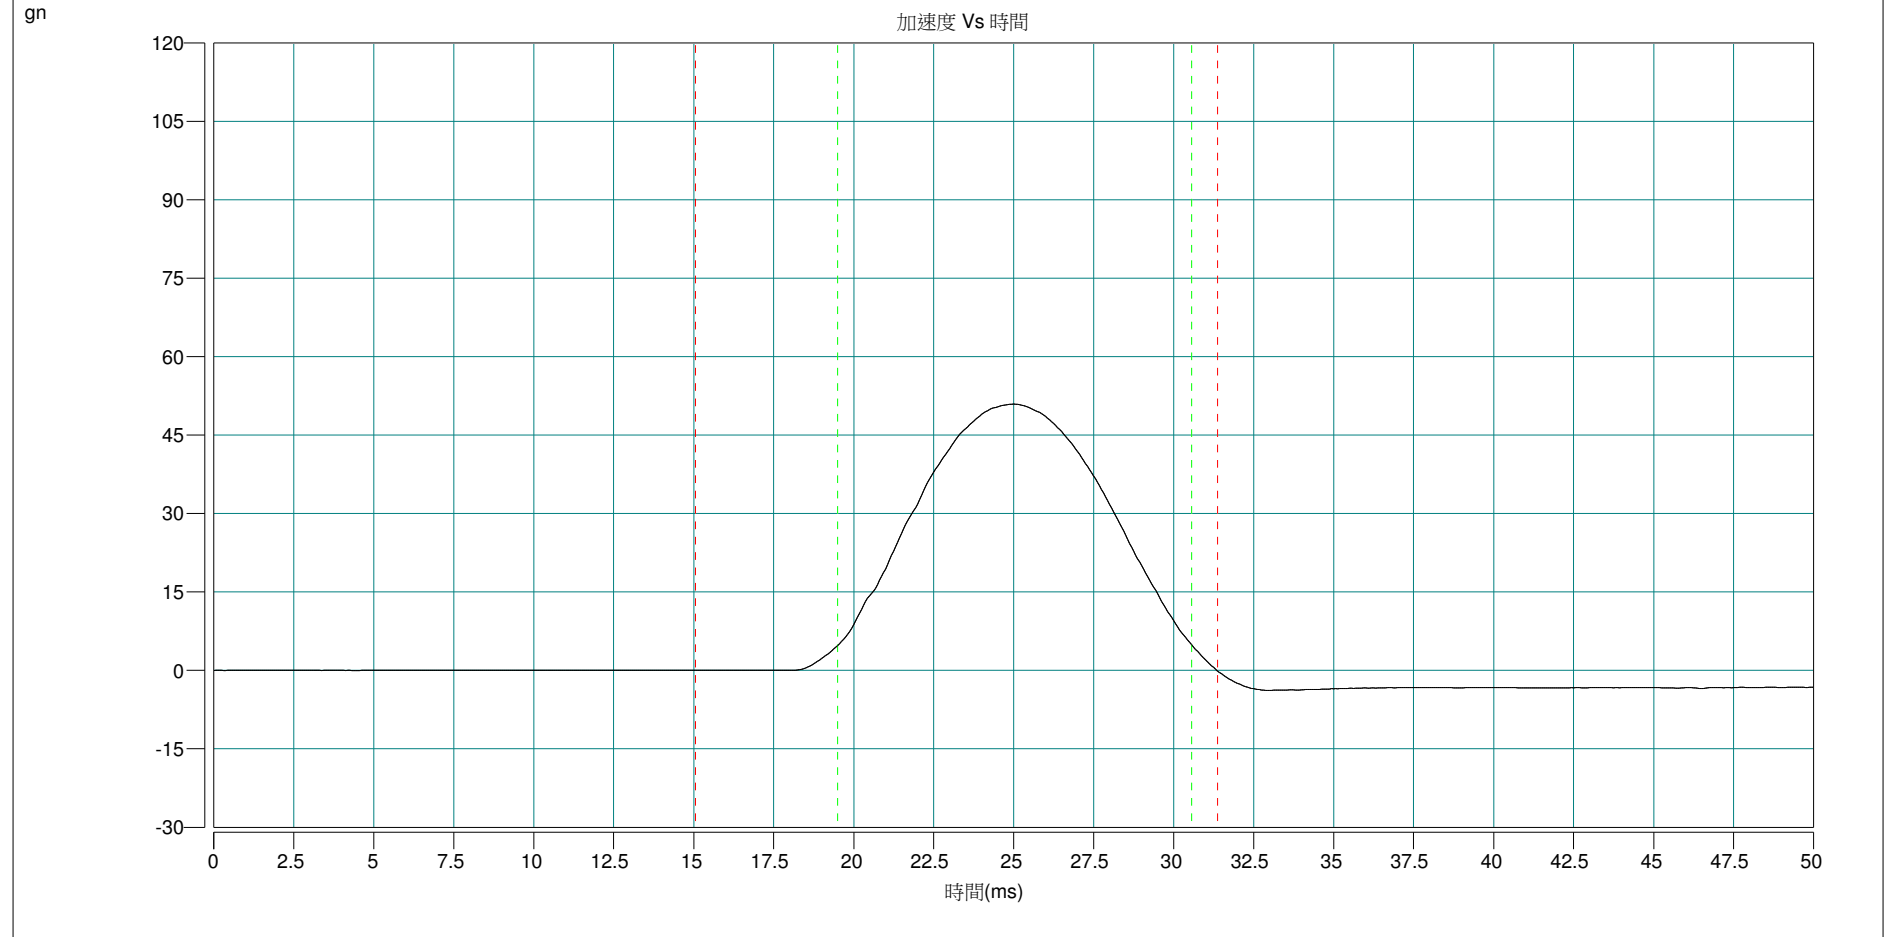

-Z axis

| Signal    | Acceleration (gn) | Duration (ms) | Velocity (In/s) | Filter (Hz) | Max Acc (gn) | Min Acc (gn) |
|-----------|-------------------|---------------|-----------------|-------------|--------------|--------------|
| Input1(t) | 50.85             | 11.09         | 3.51            | 500.00      | 50.85        | -3.70        |

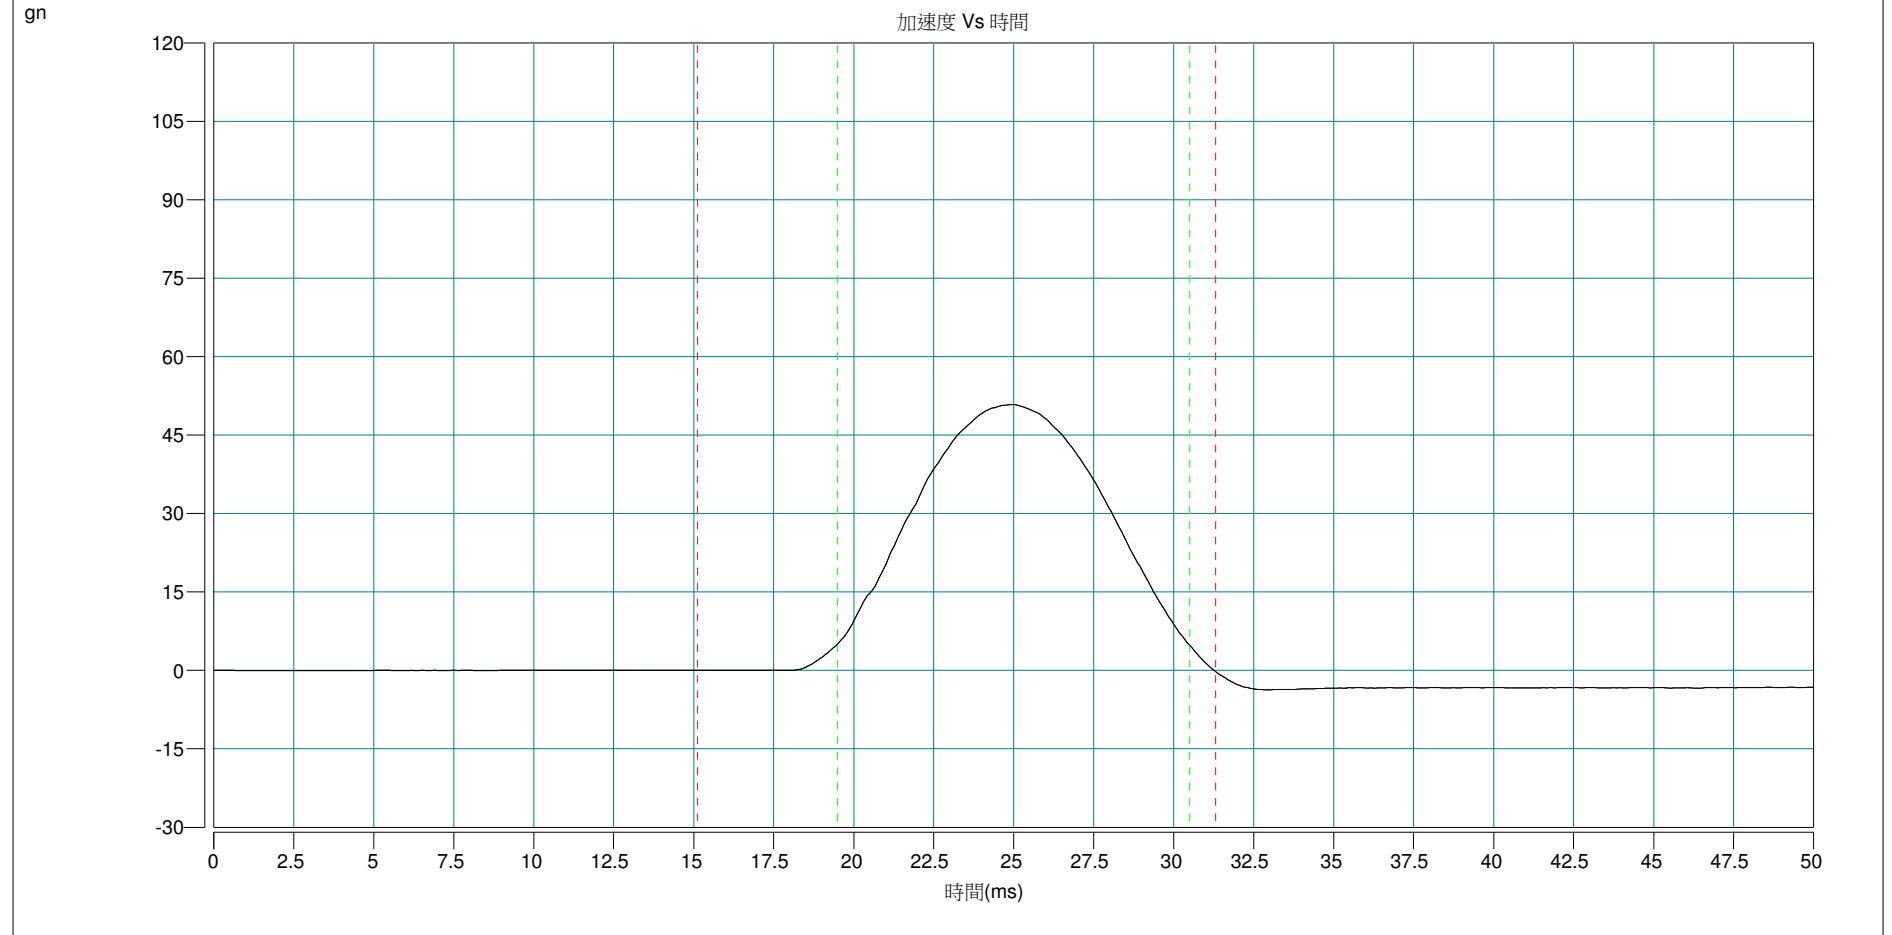

**-END-**