

MTBF

Report of Apacer products, SATA SSD Series

Nov, 2011

Version 1.6



Apacer Technology Inc.

4th Fl., 75 Xintai 5th Rd., Sec.1, Hsichih, Taipei Hsien 221, Taiwan, R.O.C


Tel:+886-2-2698-2888

Fax:+886-2-2698-2889

MTBF

OVERVIEW

MTBF, stands for mean time between failures, is the average time between failures of hardware modules. It is the average time a manufacturer estimates before a failure occurs in a hardware module.

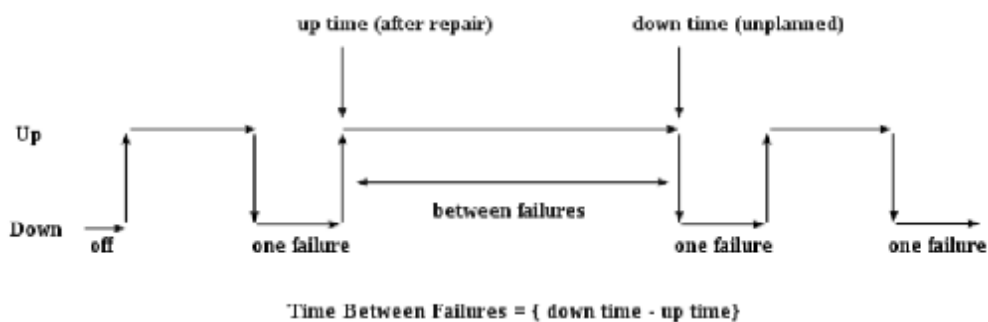

*This figure depicts the background of MTBF calculation and is granted by its author to anyone using this work for any purpose. For further detail, refer to http://en.wikipedia.org/wiki/File:Time_between_failures.svg

In above figure, downtime is the momentary period it went down uptime. The difference of downtime subtracts by uptime is the amount of time between the two events, which is the time between failures.

MTBF plays an important role in the development of products. Engineers of reliability and design engineers often utilize reliability applications to figure out a product's MTBF according to various methods/standards and to put efforts on the yield rate in the production.

MTBF PREDICTION

Apacer's MTBF prediction adopts and complies with Bellcore analysis method 1. Assuming device failure rate can be generated by the sum of failure rates in each component, then, a steady state failure rate can be expressed as below equation.

$$\lambda_{SS} = \pi_E \sum_{i=1}^m (Ni \lambda_{SSi})$$

m : number of component types

λ_{SS} : device failure rate at steady state

Ni : quantity of i type component

λ_{SSi} : failure rate for i type component at steady state

π_E : device environment factor

PROCEDURE OF MTBF CALCULATION

1. Collect characteristic information of the product.
2. Prepare bill of material (BOM) and component specifications.
3. Analyze BOM and produce component parameters.
4. Determine calculation equation for every component.
5. Calculate failure rates of each component.
6. Generate product failure rate and MTBF.

CALCULATED MTBF (HOURS) BY PRODUCTS

Project	MTBF	NAND
<i>SAFD25M2</i>	$\geq 2.06 \times 10^6$ (hrs)	SLC
<i>SAFD25M2-M</i>	$\geq 1.26 \times 10^6$ (hrs)	MLC
<i>SAFD254</i>	$\geq 2.30 \times 10^6$ (hrs)	SLC
<i>SAFD254-M</i>	$\geq 1.28 \times 10^6$ (hrs)	MLC
<i>SDC II</i>	$\geq 2.09 \times 10^6$ (hrs)	SLC
<i>SDM</i>	$\geq 2.16 \times 10^6$ (hrs)	SLC
<i>SDMII</i>	$\geq 2.08 \times 10^6$ (hrs)	SLC
<i>SDMII-M</i>	$\geq 1.20 \times 10^6$ (hrs)	MLC
<i>SAFD18S</i>	$\geq 2.14 \times 10^6$ (hrs)	SLC
<i>SAFD18S-M</i>	$\geq 1.29 \times 10^6$ (hrs)	MLC
<i>SAFD181</i>	$\geq 2.23 \times 10^6$ (hrs)	SLC
<i>SAFD181-M</i>	$\geq 1.33 \times 10^6$ (hrs)	MLC
<i>SAFD255</i>	$\geq 2.08 \times 10^6$ (hrs)	SLC
<i>SAFD25M3</i>	$\geq 2.11 \times 10^6$ (hrs)	SLC

Project	MTBF	NAND
<i>SDM3</i>	$\geq 2.17 \times 10^6$ (hrs)	SLC
<i>SAFD18S3</i>	$\geq 2.11 \times 10^6$ (hrs)	SLC
<i>SAFD25P</i>	$\geq 2.15 \times 10^6$ (hrs)	SLC
<i>SAFD25P-M</i>	$\geq 1.34 \times 10^6$ (hrs)	MLC
<i>SAFD18P-M</i>	$\geq 1.56 \times 10^6$ (hrs)	MLC
<i>SAFD25M4</i>	$\geq 2.36 \times 10^6$ (hrs)	SLC
<i>SDM4</i>	$\geq 2.61 \times 10^6$ (hrs)	SLC
<i>SDM4-M</i>	$\geq 1.86 \times 10^6$ (hrs)	MLC
<i>SDC4</i>	$\geq 2.15 \times 10^6$ (hrs)	SLC
<i>SAFD18S4-M</i>	$\geq 1.82 \times 10^6$ (hrs)	MLC
<i>SAFD18S4</i>	$\geq 2.26 \times 10^6$ (hrs)	SLC

REVISION HISTORY

Revision	Date	Description	Remark
0.1	Aug 11, 2009	Preliminary release	
1.0	Aug 20, 2009	Formal version release	
1.1	Aug 29, 2009	Update MTBF for SDMI	
1.2	Aug 31, 2009	Update MTBF for SAFD18S, SAFD181	
1.3	Dec 09, 2009	Update references source	
1.4	Jul 22, 2011	Update MTBF for SAFD255, SAFD25M3, SDM3, SAFD18S3	
1.5	Nov 04, 2011	Update MTBF for SAFD25P, SAFD25P-M	
1.6	Nov 25, 2011	Update MTBF for SAFD18P-M, SAFD25M4, SDM4, SDC4, SAFD18S4-M, SAFD18S4	

Apacer Technology Inc.

4th Fl., 75 Xintai 5th Rd. Sec.1
Hsichih, Taipei County 221, Taiwan
Tel: +886-2-2698-2888 Fax: +886-2-2698-2889
www.apacer.com

Copyright © 2009 Apacer Technology Inc. All Rights Reserved.

Information in this document is subject to change without prior notice.

Apacer and the Apacer logo are trademarks or registered trademarks of Apacer Technology Inc.
Other brands, names, trademarks or registered trademarks may be claimed as the property of
their respective owners.